



COMBINERS

PROCOM A/S



| | |
|--------------------------|----|
| Home | 1 |
| PRO-PHY85-4DI | 5 |
| PRO-PHY85-3SI | 6 |
| PRO-PHY900-2SI-35 | 7 |
| PRO-PHY85-4SI | 8 |
| PRO-PHY85-3DI | 9 |
| PRO-PHY85-8SI | 10 |
| PRO-PHY85-6DI-100 | 12 |
| PRO-PHY85-8DI | 13 |
| PRO-PHY85-3 | 15 |
| PRO-PHY85-2SI | 17 |
| PRO-PHY85-2DI | 18 |
| PRO-PHY85-2 | 19 |
| PRO-PHY450-8SI | 21 |
| PRO-PHY450-8DI | 23 |
| PRO-PHY450-6DI-100 | 24 |
| PRO-PHY450-5SI3 | 25 |
| PRO-PHY450-5 | 26 |
| PRO-PHY450-4SI | 28 |
| PRO-PHY450-4DI | 30 |
| PRO-PHY450-4/380-410/SWR | 31 |
| PRO-PHY450-4 | 33 |
| PRO-PHY450-3SI | 35 |
| PRO-PHY450-3DI | 36 |
| PRO-PHY450-3/380-410/SWR | 37 |
| PRO-PHY450-3 | 39 |
| PRO-PHY450-2SI | 41 |
| PRO-PHY450-2DI | 42 |
| PRO-PHY450-2/380-410/SWR | 43 |
| PRO-PHY450-2 | 45 |
| PRO-PHY150-8SI | 47 |
| PRO-PHY150-6DI-100 | 49 |
| PRO-PHY150-5SI3 | 50 |
| PRO-PHY150-5DI3 | 52 |
| PRO-PHY150-5 | 53 |
| PRO-PHY150-4SI | 55 |
| PRO-PHY150-4DI | 56 |
| PRO-PHY150-4 | 57 |
| PRO-PHY150-3SI | 59 |
| PRO-PHY150-3DI | 60 |
| PRO-PHY150-3 | 61 |
| PRO-PHY150-2SI | 63 |
| PRO-PHY150-2DI | 64 |
| PRO-PHY150-2 | 65 |
| PRO-ISO-PHY-TETRA-ELW | 67 |
| PRO-ISO-PHY-TETRA-8 | 70 |
| PRO-ISO-PHY-TETRA-6 | 73 |

| | |
|-----------------------------|-----|
| PRO-ISO-PHY-TETRA-4 | 75 |
| PRO-ISO-PHY-TETRA-3 | 78 |
| PRO-ISO-PHY-TETRA-2 | 81 |
| DCB 890-2300-7/16 | 84 |
| DCB 1G-3G-SMA | 86 |
| PRO-BCU 130 | 88 |
| PRO-BBPHY 4/2-20-.. dB-N | 89 |
| PRO-BBPHY 4/146-470-20-N | 91 |
| PRO-BBPHY 2/70-20-6 dB-N | 93 |
| PRO-BBPHY 2/70-20-3 dB-N | 95 |
| RPD 145-470/800-1000-10-N | 97 |
| RH 1800/... | 99 |
| PRO-PHY85-4 | 101 |
| PRO-PHY-500-3400-4 | 103 |
| PRO-PHY 380-520-3 dB-N XS | 105 |
| PHY-TETRA-4-FME-... | 107 |
| PHY-TETRA-2-FME-... | 109 |
| PRO-AREL1-12V | 111 |
| PRO-BBPHY 2/70-20-10 dB-N | 113 |
| PRO-BBMPHY-74-175-3 dB-100W | 115 |
| PRO-BBMPHY-450-2-N | 117 |
| PRO-BBMPHY-200-2-N | 119 |
| PRO-BBMPHY-150-2-N | 121 |
| PRO-2REL-1PM-12V-...-TNC | 123 |
| PRO-RPS-4-N | 125 |
| PRO-RPS-4-GPS-N | 127 |
| PRO-RPS-2-N | 129 |
| PRO-RPS-2-GPS-N | 131 |
| PRO-PS4-DC-2.5G-N | 133 |
| PRO-PS2-DC-2.5G-N | 135 |
| PRO-PRL 15W-7/16 | 137 |
| PRO-PHY 380-520-3 dB-... | 138 |
| PRO-PHY 380-2700-3 dB-... | 141 |
| PRO-PDI2-40-1G-10 dB-10W-N | 144 |
| PRO-PDI2-40-1G-7 dB-10W-N | 146 |
| PRO-PDI2-40-1G-6 dB-2.5W-N | 148 |
| PRO-PDI2-40-1G-6 dB-10W-N | 150 |
| PRO-PDI2-40-1G-20 dB-10W-N | 152 |
| PRO-PDI2-40-1G-20 dB10W-N | 154 |
| PRO-PDI2-40-1G-10 dB-2.5W-N | 156 |
| PRO-ATT ... dB-25-3 | 158 |
| PRO-ATT ... dB-2-3-N | 160 |
| PRO-PDI2-0.8-2.7G-20W-N | 162 |
| PRO-MPHY450-2-.. dB-N-... | 164 |
| PRO-MPHY150-2-... dB | 166 |
| PRO-MMU 0.8-2.5G-200W-N | 168 |
| PRO-COM450-HDAR-4/... | 170 |
| PRO-COM450-HDAR-3/... | 172 |
| PRO-COM150-HDAR-4/... | 174 |
| PRO-COM150-HDAR-3/... | 176 |

| | |
|---------------------------|-----|
| PRO-COM150-SRC-2 | 179 |
| PRO-CAV85-7 | 182 |
| PRO-CAV85-6 | 184 |
| PRO-CAV85-5 | 186 |
| PRO-CAV85-4 | 188 |
| PRO-CAV85-3 | 189 |
| PRO-CAV85-2 | 190 |
| PRO-CAV450-8 | 191 |
| PRO-CAV450-7 | 193 |
| PRO-CAV450-6 | 195 |
| PRO-CAV450-5 | 197 |
| PRO-CAV450-4 | 199 |
| PRO-CAV450-3 | 201 |
| PRO-CAV450-2 | 202 |
| PRO-CAV130-8 | 203 |
| PRO-CAV150-7 | 205 |
| PRO-COM450-HDAR-2/... | 207 |
| PRO-CAV85-8 | 209 |
| PRO-CAV150-5 | 211 |
| PRO-CAV150-4 | 213 |
| PRO-CAV150-3 | 215 |
| PRO-CAV150-2 | 216 |
| PRO-PDI-2-TETRA-FME-J-... | 217 |
| PRO-ISO-PHY-TETRA-S-ELW | 219 |
| PRO-ISO-PHY-TETRA-S2 | 222 |
| PRO-ISO-PHY-TETRA-S3 | 225 |
| PRO-ISO-PHY-TETRA-S4 | 228 |
| PRO-PHY 450-6SI-100 | 231 |
| PRO-DMO/TMO-4 | 232 |
| PRO-PHY350-2 | 234 |
| PRO-ISO-PHY-TETRA-S6 | 236 |
| PRO-ISO-PHY-TETRA-S8 | 239 |
| PRO-CAV130-2 | 242 |
| PRO-CAV130-3 | 243 |
| PRO-CAV130-4 | 244 |
| PRO-CAV130-5 | 246 |
| PRO-CAV130-6 | 248 |
| PRO-CAV130-7 | 250 |
| PRO-CAV150-8 | 252 |
| PRO-COM150-HDAR-2/... | 253 |
| PRO-ISO-PHY-435/440-S8 | 255 |
| End | 258 |



PRO-PHY85-4DI

4-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Dual isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...4DI-35) or 100 W (PRO-PHY...4DI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | | PRODUCT NO. |
|-------------------|---------------|-------------|
| PRO-PHY85-4DI-35 | 21000125 6 | |
| PRO-PHY85-4DI-100 | 21000052 9 | |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|------------------------|
| MODEL | PRO-PHY85-4DI... |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 3 MHz |
| TYP. INSERTION LOSS | 7.2 dB |
| TX-TX ISOLATION | > 90 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 133 x 400/500 mm |
| WEIGHT | Approx. 9.5/14.1 kg |



PRO-PHY85-3SI

3-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.
- Single isolators fitted as standard.

Description

- A range of racks and cabinets are available.
- Option: Maximum input power of 35 W (PRO-PHY...3SI-35) or 100 W (PRO-PHY...3SI-100).
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------|-------------|
| PRO-PHY85-3SI-35 | 210000561 |
| PRO-PHY85-3SI-100 | 210001253 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|-----------------------|
| MODEL | PRO-PHY85-3SI-... |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 3 MHz |
| TYP. INSERTION LOSS | 5.5 dB |
| TX-TX ISOLATION | > 65 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 89 x 400/500 mm |
| WEIGHT | Approx. 6.3/9.8 kg |



PRO-PHY900-2SI-35

2-Channel Hybrid Combiners

- The PRO-PHY series of hybrid combiners have been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.
- Single isolators fitted as standard.

- A range of racks and cabinets are available (see Accessories).
- Option: Maximum input power of 35 W.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------|-------------|
| PRO-PHY900-2SI-35 | 210001187 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|-------------------|
| MODEL | PRO-PHY900-2SI-35 |
| TX FREQUENCY | 800 - 960 MHz |
| MAX. INPUT POWER | 35 W |
| TX-TX SPACING, Δ TX | < 20 MHz |
| TYP. INSERTION LOSS | 3.6 dB |
| TX-TX ISOLATION | > 60 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 89 x 300 mm |
| WEIGHT | 4.6 kg |



PRO-PHY85-4SI

4-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.
- Single isolators fitted as standard.

DESCRIPTION

- A range of racks and cabinets are available.
- Option: Maximum input power of 35 W (PRO-PHY...4SI-35) or 100 W (PRO-PHY...4SI-100).
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | | PRODUCT NO. |
|-------------------|---------------|-------------|
| PRO-PHY85-4SI-35 | 21000086 6 | |
| PRO-PHY85-4SI-100 | 21000125 5 | |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|------------------------|
| MODEL | PRO-PHY85-4SI-... |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 3 MHz |
| TYP. INSERTION LOSS | 6.6 dB |
| TX-TX ISOLATION | > 65 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 133 x 400/500 mm |
| WEIGHT | Approx. 7.4/11.9 kg |



PRO-PHY85-3DI

3-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Dual isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...3DI-35) or 100 W (PRO-PHY...3DI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------|-------------|
| PRO-PHY85-3DI-35 | 210001254 |
| PRO-PHY85-3DI-100 | 210000820 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|-----------------------|
| MODEL | PRO-PHY85-3DI-... |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 3 MHz |
| TYP. INSERTION LOSS | 6.1 dB |
| TX-TX ISOLATION | > 90 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 89 x 400/500 mm |
| WEIGHT | Approx. 7.9/11.4 kg |



PRO-PHY85-8SI

8-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.
- Single isolators fitted as standard.

- A range of racks and cabinets are available.
- Option: Maximum input power of 35 W (PRO-PHY...-8SI-35) or 100 W (PRO-PHY...-8SI-100).
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------|-------------|
| PRO-PHY85-8SI-35 | 210001134 |
| PRO-PHY85-8SI-100 | 210001135 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|---|
| MODEL | PRO-PHY85-8SI-... |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 3 MHz |
| TYP. INSERTION LOSS | 11.1 dB |
| TX-TX ISOLATION | > 65 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 8 HU x 400 mm (483 x 356 x 400 mm) |
| WEIGHT | Approx. 30 kg |





PRO-PHY85-6DI-100

6-Channel Hybrid Combiner for 100 W

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.
- Dual isolators fitted as standard.

- Maximum input power of 100 W.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------|-------------|
| PRO-PHY85-6DI-100 | 210001265 |

SPECIFICATIONS

| ELECTRICAL | |
|---|--|
| MODEL | PRO-PHY85-6DI-100 |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 100 W |
| TX-TX SPACING, Δ TX | < 3 MHz |
| TYP. INSERTION LOSS | 9.2 dB |
| TX-TX ISOLATION | > 90 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (H x W x L) (H x W x L) Alternative | 6HU x 483 x 500 mm (267 x 483 x 500 mm) 8HU x 483 x 400 mm (356 x 483 x 500 mm) |
| WEIGHT | Approx. 26 kg |



PRO-PHY85-8DI

8-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.
- Dual isolators fitted as standard.

- A range of racks and cabinets are available.
- Option: Maximum input power of 35 W (PRO-PHY...-8DI-35) or 100 W (PRO-PHY...-8DI-100).
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------|-------------|
| PRO-PHY85-8DI-35 | 210001136 |
| PRO-PHY85-8DI-100 | 210001137 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|---|
| MODEL | PRO-PHY85-8DI-... |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 3 MHz |
| TYP. INSERTION LOSS | 11.5 dB |
| TX-TX ISOLATION | > 90 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 8 HU x 400 mm (483 x 356 x 400 mm) |
| WEIGHT | Approx. 35 kg |





PRO-PHY85-3

3-Channel Hybrid Combiner for 85 MHz Transmitters

- Combining three transmitters or receivers on the same antenna.
 - Better utilization of good antenna position.
 - Three antennas on the same transmitter or receiver.
-
- The only combining option with very small TX-TX frequency spacing.
 - 60 W load supplied (other loads or no load as option).

ORDERING DESIGNATIONS

| TYPE | FREQ. RANGE | PRODUCT NO. |
|---------------|-------------|-------------|
| PRO-PHY85-3-1 | 67 - 71 MHz | 210000785 |
| PRO-PHY85-3-2 | 70 - 74 MHz | 210000736 |
| PRO-PHY85-3-3 | 73 - 77 MHz | 210000549 |
| PRO-PHY85-3-4 | 76 - 80 MHz | 210000703 |
| PRO-PHY85-3-5 | 79 - 83 MHz | 210000737 |
| PRO-PHY85-3-6 | 82 - 86 MHz | 210000693 |
| PRO-PHY85-3-7 | 85 - 89 MHz | 210000694 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------------|--|
| FILTER TYPE | Hybrid Junction |
| FREQUENCY | 68 - 88 MHz (see table) |
| MAX. INPUT POWER | 75 W per channel (max. 150 W with larger load) |
| INSERTION LOSS | < 5.2 dB ± 0.3 dB @ 2 MHz BW < 5.4 dB ± 0.3 dB @ 4 MHz BW |
| ISOLATION TX 1-TX 2 (*see note) | > 26 dB @ 2 MHz BW > 25 dB @ 4 MHz BW |
| IMPEDANCE | Nom. 50 Ω |
| LOAD (**see note) | 30 W load fitted (other ratings available) |
| SWR | < 1.5 with all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female (other types available) |


| | |
|------------------------|---|
| DIMENSIONS (L x W x H) | 400 x 89(incl. conn.) x 42 mm (excl. loads) |
| WEIGHT | Approx. 1300 g (excl. load) |

* The isolation between the TX ports is directly dependent on the terminating SWR on the antenna port. With an antenna load SWR = 1.5, the isolation between the two TX ports will be reduced to 20 dB @ 5 MHz bandwidth.

** The SWR of the load's should be < 1.1! Each load should be able to dissipate 2/3 of the input power.

E.g.: With 50 W input, each load should be able to dissipate $50 \text{ W} \times 2/3 = 33 \text{ W}$.

RESPONSE CURVE

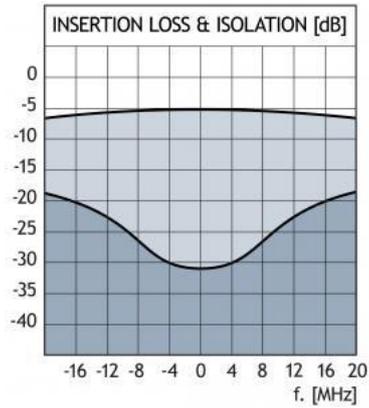



PRO-PHY85-2SI

2-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Single isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...2SI-35) or 100 W (PRO-PHY...2SI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------|-------------|
| PRO-PHY85-2SI-35 | 210000924 |
| PRO-PHY85-2SI-100 | 210001073 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|--------------------|
| MODEL | PRO-PHY85-2SI-... |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 3 MHz |
| TYP. INSERTION LOSS | 3.6 dB |
| TX-TX ISOLATION | > 65 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 89 x 400 mm |
| WEIGHT | Approx. 4.7/5.8 kg |



PRO-PHY85-2DI

2-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Dual isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...2DI-35) or 100 W (PRO-PHY...2DI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------|-------------|
| PRO-PHY85-2DI-35 | 210000844 |
| PRO-PHY85-2DI-100 | 210000519 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|--------------------|
| MODEL | PRO-PHY85-2DI-... |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 3 MHz |
| TYP. INSERTION LOSS | 4.2 dB |
| TX-TX ISOLATION | > 90 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 89 x 400 mm |
| WEIGHT | Approx. 5.8/6.9 kg |



PRO-PHY85-2

2-Channel Hybrid Ring Combiner for 85 MHz Transmitters

- Combining two transmitters or receivers on the same antenna.
- Better utilization of good antenna position.
- Two antennas on the same transmitter or receiver.

- Combining two signal generators.
- The only combining option with very small TX-TX frequency spacing.
- 60 W load supplied (other loads or no load as option).

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. | FREQUENCY |
|---------------|-------------|-------------|
| PRO-PHY85-2-1 | 210000539 | 68 - 72 MHz |
| PRO-PHY85-2-2 | 210000653 | 71 - 75 MHz |
| PRO-PHY85-2-3 | 210000550 | 74 - 78 MHz |
| PRO-PHY85-2-4 | 210000589 | 77 - 81 MHz |
| PRO-PHY85-2-5 | 210000588 | 80 - 84 MHz |
| PRO-PHY85-2-6 | 210000541 | 83 - 87 MHz |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------------|---|
| MODEL | PRO-PHY85-2-... |
| FILTER TYPE | Hybrid Ring Junction |
| FREQUENCY | 66 - 88 MHz (see table) |
| MAX. INPUT POWER | 50 W per channel (max. 150 W with larger load) |
| INSERTION LOSS | < 3.4 dB @ 2 MHz BW < 3.7 dB @ 4 MHz BW |
| ISOLATION TX 1-TX 2 (*see note) | > 35 dB @ 2 MHz BW > 30 dB @ 4 MHz BW |
| IMPEDANCE | Nom. 50 Ω |
| LOAD (**see note) | 60 W load fitted (other ratings available) |
| SWR | < 1.5 with all other ports terminated with 50 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female (other types as option) |
| DIMENSIONS (L x W x H) | 216 x 89 (incl. conn.) x 42 mm (excl. load) |


| | |
|--------|----------------------------|
| WEIGHT | Approx. 700 g (excl. load) |
|--------|----------------------------|

*The isolation between the TX ports is directly dependent on the terminating SWR on the antenna port. With an antenna load SWR = 1.5, the isolation between the two TX ports will be reduced to 20 dB @ 5 MHz bandwidth.

**The SWR of the load's should be < 1.1! The load should be able to dissipate 1/2 of the total input power.

E.g.: With 50 W input in total for the two channels, the load should be able to dissipate $50 \text{ W} \times 1/2 = 25 \text{ W}$.

LOSS & ISOLATION

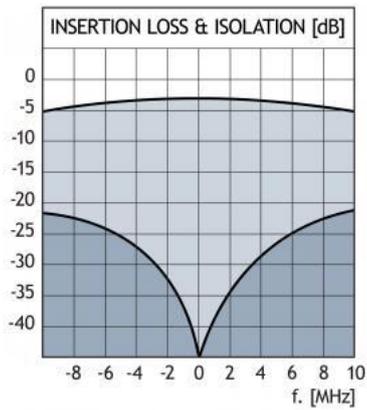



PRO-PHY450-8SI

8-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.
- Single isolators fitted as standard.

- A range of racks and cabinets are available.
- Option: Maximum input power of 35 W (PRO-PHY...-8SI-35) or 100 W (PRO-PHY...-8SI-100).
- Please specify the frequencies for TX when ordering.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY450-8SI-35 | 210001213 |
| PRO-PHY450-8SI-100 | 210001214 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|---|
| MODEL | PRO-PHY450-8SI-... |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 11 MHz |
| TYP. INSERTION LOSS | 11.1 dB |
| TX-TX ISOLATION | > 65 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 8 HU x 400 mm (483 x 356 x 400 mm) |
| WEIGHT | Approx. 30 kg |



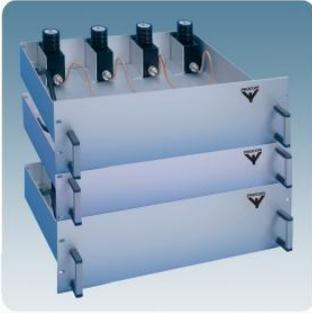

PRO-PHY450-8DI

8-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.
- Dual isolators fitted as standard.

- A range of racks and cabinets are available.
- Option: Maximum input power of 35 W (PRO-PHY...-8DI-35) or 100 W (PRO-PHY...-8DI-100).
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY450-8DI-35 | 210000898 |
| PRO-PHY450-8DI-100 | 210000899 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|---|
| MODEL | PRO-PHY450-8DI-... |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 11 MHz |
| TYP. INSERTION LOSS | 11.6 dB |
| TX-TX ISOLATION | > 95 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 8 HU x 400 mm (483 x 356 x 400 mm) |
| WEIGHT | Approx. 33 kg |
| ENVIRONMENTAL | |
| TEMP. RANGE | -30° C → +60° C |



PRO-PHY450-6DI-100

6-Channel Hybrid Combiner for 100 W

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.

- Dual isolators fitted as standard.
- Maximum input power of 100 W.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY450-6DI-100 | 210000901 |

SPECIFICATIONS

| ELECTRICAL | |
|---|--|
| MODEL | PRO-PHY450-6DI-100 |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 100 W |
| TX-TX SPACING, Δ TX | < 11 MHz |
| TYP. INSERTION LOSS | 9.1 dB |
| TX-TX ISOLATION | > 90 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (H x W x L) (H x W x L) Alternative | 6HU x 483 x 500 mm (267 x 483 x 500 mm) 8HU x 483 x 400 mm (356 x 483 x 500 mm) |
| WEIGHT | Approx. 25 kg |



PRO-PHY450-5SI3

5-Channel Compact Hybrid Combiners with single or dual isolators

- The compact 5-channel hybrid combiner has been designed to help where a physical small size is of great importance. Also the insertion loss is equal and low for all five channels.
- The hybrid is used where 5 TX-channels, with very little (or no) frequency spacing, are combined into one antenna.
- The hybrid combiner is for 19" rack mounting.

- Dual isolators are fitted as standard.
- Options: Maximum input of 50 or 100 W.
- Please specify the frequencies for each TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY450-5DI3-35 | 210000716 |
| PRO-PHY450-5SI3-35 | 210000710 |

SPECIFICATIONS

| ELECTRICAL | | |
|------------------------------|--------------------|--------------------|
| MODEL | PRO-PHY450-5DI3-35 | PRO-PHY450-5SI3-35 |
| TX FREQUENCY | 380 - 470 MHz | 380 - 470 MHz |
| MAX. INPUT POWER | 35 W / 100 W | 35 W / 100 W |
| TX-TX SPACING, Δ TX | 0 < TX < 20 MHz | 0 < TX < 20 MHz |
| TYP. INSERTION LOSS | 9 dB | 8.6 dB |
| TX-TX ISOLATION | ≥ 90 dB | ≥ 70 dB |
| IMPEDANCE | Nom. 50 Ω | Nom. 50 Ω |
| SWR | ≤ 1.5 | ≤ 1.5 |
| MECHANICAL | | |
| TEMP. RANGE | -30° C → +60° C | -30° C → +60° C |
| CONNECTORS | N-female | N-female |
| DIMENSIONS (L x W x H) 35 W | 483 x 133 x 400 mm | 483 x 133 x 400 mm |
| WEIGHT 35 W | Approx. 11 kg | Approx. 10.5 kg |
| DIMENSIONS (L x W x H) 100 W | 483 x 133 x 500 mm | 483 x 133 x 500 mm |
| WEIGHT 100 W | Approx. 15 kg | Approx. 14 kg |



PRO-PHY450-5

5-Channel Hybrid Combiner for 450 MHz Transmitters

- Combining five transmitters or receivers on the same antenna.
- Better utilisation of good antenna position.
- Five antennas on the same transmitter or receiver.

- The only combining option with very small TX-TX frequency spacing.
- 60 W loads included (other loads or no loads as option).

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. | FREQ. RANGE |
|----------------|-------------|---------------|
| PRO-PHY450-5-1 | 210001383 | 380 - 400 MHz |
| PRO-PHY450-5-2 | 210001384 | 390 - 410 MHz |
| PRO-PHY450-5-3 | 210001385 | 400 - 420 MHz |
| PRO-PHY450-5-4 | 210001386 | 410 - 430 MHz |
| PRO-PHY450-5-5 | 210001387 | 420 - 440 MHz |
| PRO-PHY450-5-6 | 210001388 | 430 - 450 MHz |
| PRO-PHY450-5-7 | 210001389 | 440 - 460 MHz |
| PRO-PHY450-5-8 | 210001390 | 450 - 470 MHz |
| PRO-PHY450-5-9 | 210001391 | 460 - 480 MHz |

SPECIFICATIONS


| ELECTRICAL | |
|------------------------------------|--|
| FILTER TYPE | Hybrid Junction |
| FREQUENCY | 380 - 480 MHz (see table) |
| MAX. INPUT POWER | 65 W per channel (max. 150 W with larger load) |
| INSERTION LOSS | < 7.5 dB ± 0.3 dB @ 11 MHz BW < 7.8 dB ± 0.3 dB @ 22 MHz BW |
| ISOLATION TX 1-TX 2 (*see note) | > 30 dB @ 11 MHz BW > 28 dB @ 22 MHz BW |
| MPEDANCE | Nom. 50 Ω |
| LOAD | 30 W load fitted (other ratings available) |
| SWR | < 1.5 with all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |

| | |
|------------------------|---|
| CONNECTORS | N-female (other types as option) |
| DIMENSIONS (L x W x H) | 510 x 89 (incl. conn.) x 42 mm (excl. load) |
| WEIGHT | Approx. 1625 g (excl. load) |

*The isolation between the TX ports is directly dependent on the terminating SWR on the antenna port. With an antenna load SWR = 1.5, the isolation between the two TX ports will be reduced to 20 dB @ 5 MHz bandwidth.

**The SWR of the load's should be < 1.1! Each load should be able to dissipate 4/5 of the input power.
E.g.: With 50 W input, each load should be able to dissipate $50 \text{ W} \times 4/5 = 40 \text{ W}$.

TYPICAL RESPONSE CURVE

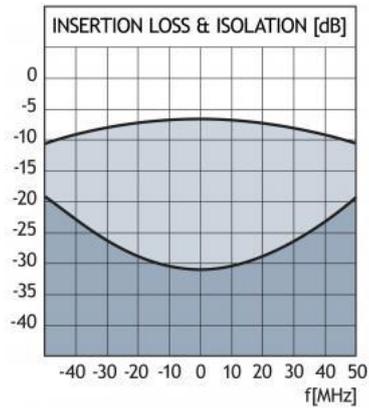



PRO-PHY450-4SI

4-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners ha been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.
- Single isolators fitted as standard.

- A range of racks and cabinets are available.
- Option: Maximum input power of 35 W (PRO-PHY...4SI-35) or 100 W (PRO-PHY...4SI-100).
- Please specify the frequencies for TX when ordering.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY450-4SI-35 | 210000521 |
| PRO-PHY450-4SI-100 | 210000551 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|--|
| MODEL | PRO-PHY450-4SI-... |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 20 MHz |
| TYP. INSERTION LOSS | < 7.2 dB (Typ. 7.0 dB) |
| TX-TX ISOLATION | > 70 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 133 x 400/500 mm 19.02 x 5.24 x 15.75/19.69 in. |
| WEIGHT | Approx. 7.3/11.8 kg / 16.09/26.01 lb. |

MOUNTING DETAILS

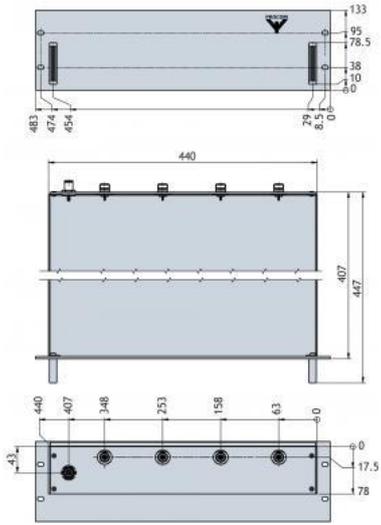



PRO-PHY450-4DI

4-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Dual isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...4DI-35) or 100 W (PRO-PHY...4DI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY450-4DI-35 | 210000592 |
| PRO-PHY450-4DI-100 | 210000560 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|--|
| MODEL | PRO-PHY450-4DI-... |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 20 MHz |
| TYP. INSERTION LOSS | |
| TX-TX ISOLATION | > 100 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 133 x 400/500 mm 19.02 x 5.24 x 15.75/19.69 in. |
| WEIGHT | Approx. 9.4/14.0 kg / 20.72/30.86 lb. |



PRO-PHY450-4/380-410/SWR

4-Channel Hybrid Ring Combiner including antenna tuner for TETRA Communication Radios

- Combiner for parallel operation of four TETRA transceivers on one common antenna where highest possible decoupling (isolation) is necessary.
- Network can be adjusted for optimization of isolation.
- High isolation achievable: Up to -50 dB at the centre frequency (dependant on the SWR of the connected antenna).

- Max. power 50 W per channel.
- Very small ripple on the connectors over the total frequency range.



ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------------|-------------|
| PRO-PHY450-4/380-410/SWR | 210000944 |

SPECIFICATIONS

| ELECTRICAL | |
|--|---|
| MODEL | PRO-PHY450-4/380-410/SWR |
| FILTER TYPE | Hybrid Ring Junction |
| FREQUENCY | 380 - 410 MHz |
| MAX. INPUT POWER | 50 W per channel (max. 150 W with larger load) |
| NOMINAL DIVIDER LOSS | 6.0 dB |
| TOTAL LOSS INCL. SPLITTER LOSS /COUPLER LOSS | < 6.9 dB |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | < 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | N-female (Others on request) |
| DIMENSIONS (L x W x H) | 420 x 182 (incl. connector) x 42 mm |
| WEIGHT | 1900 g |

ISOLATION RESPONSE

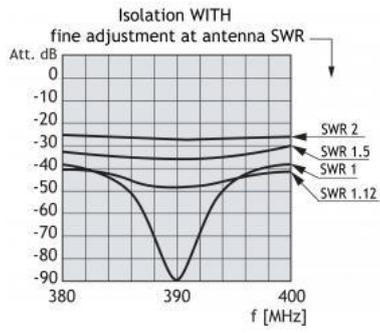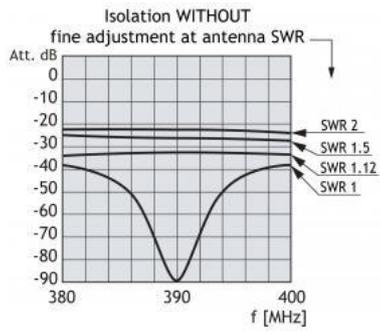



PRO-PHY450-4

4-Channel Hybrid Combiner for 450 MHz Transmitters

- Combining four transmitters or receivers on the same antenna.
- Better utilisation of good antenna position.
- Four antennas on the same transmitter or receiver.

- The only combining option with very small TX-TX frequency spacing.
- 60 W load supplied (other loads or no load as option).

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. | FREQ. RANGE |
|--------------------|-------------|---------------|
| PRO-PHY450-4-TETRA | 210001667 | 380 - 400 MHz |
| PRO-PHY450-4-1 | 210000880 | 400 - 405 MHz |
| PRO-PHY450-4-2 | 210000712 | 404 - 409 MHz |
| PRO-PHY450-4-3 | 210000698 | 408 - 413 MHz |
| PRO-PHY450-4-4 | 210000735 | 412 - 417 MHz |
| PRO-PHY450-4-5 | 210000577 | 416 - 421 MHz |
| PRO-PHY450-4-6 | 210000582 | 420 - 425 MHz |
| PRO-PHY450-4-7 | 210000644 | 424 - 429 MHz |
| PRO-PHY450-4-8 | 210000586 | 428 - 433 MHz |
| PRO-PHY450-4-9 | 210000809 | 432 - 437 MHz |
| PRO-PHY450-4-10 | 210000715 | 436 - 441 MHz |
| PRO-PHY450-4-11 | 210000834 | 440 - 445 MHz |
| PRO-PHY450-4-12 | 210000833 | 444 - 449 MHz |
| PRO-PHY450-4-13 | 210000713 | 448 - 453 MHz |
| PRO-PHY450-4-14 | 210000581 | 452 - 457 MHz |
| PRO-PHY450-4-15 | 210000665 | 456 - 461 MHz |
| PRO-PHY450-4-16 | 210000610 | 458 - 463 MHz |
| PRO-PHY450-4-17 | 210000584 | 462 - 467 MHz |
| PRO-PHY450-4-18 | 210000643 | 466 - 471 MHz |
| PRO-PHY450-4-19 | 210000891 | 470 - 475 MHz |

SPECIFICATIONS

| ELECTRICAL | |
|-------------|-----------------|
| FILTER TYPE | Hybrid Junction |


| | |
|------------------------------------|--|
| FREQUENCY | 380 - 475 MHz (see table) |
| MAX. INPUT POWER | 65 W per channel (max. 150 W with larger load) |
| INSERTION LOSS | < 6.3 dB \pm 0.3 dB @ 11 MHz BW < 6.6 dB \pm 0.3 dB @ 22 MHz BW |
| ISOLATION TX 1-TX 2 (*see note) | > 32 dB @ 11 MHz BW > 28 dB @ 22 MHz BW |
| IMPEDANCE | Nom. 50 Ω |
| LOAD | 30 W load fitted (other ratings available) |
| SWR | < 1.5 with all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| CONNECTORS | N-female (other types as option) |
| DIMENSIONS (L x W x H) | 420 x 89 (incl. conn.) x 42 mm |
| WEIGHT | Approx. 1330 g (excl. load) |

*The isolation between the TX ports is directly dependent on the terminating SWR on the antenna port. With an antenna load SWR = 1.5, the isolation between the two TX ports will be reduced to 20 dB @ 5 MHz bandwidth.


**The SWR of the loads should be < 1.1! Each load should be able to dissipate 3/4 of the input power.

E.g.: With 50 W input, each load should be able to dissipate
50 W x 3/4 = 37 W.

ISOLATION & RESPONSE

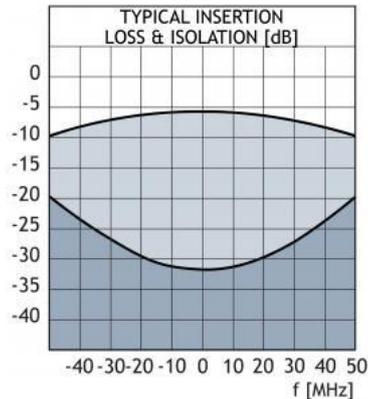

MOUNTING DETAILS

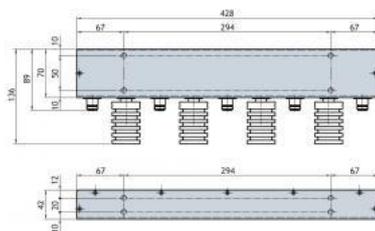



PRO-PHY450-3SI

3-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Single isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...3SI-35) or 100 W (PRO-PHY...3SI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY450-3SI-35 | 210000573 |
| PRO-PHY450-3SI-100 | 210000936 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|-----------------------|
| MODEL | PRO-PHY450-3SI-... |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 20 MHz |
| TYP. INSERTION LOSS | 5.5 dB |
| TX-TX ISOLATION | > 70 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 89 x 400/500 mm |
| WEIGHT | Approx. 6.2/9.7 kg |



PRO-PHY450-3DI

3-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Dual isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...3DI-35) or 100 W (PRO-PHY...3DI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY450-3DI-35 | 210000709 |
| PRO-PHY450-3DI-100 | 210000594 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|-----------------------|
| MODEL | PRO-PHY450-3DI-... |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 20 MHz |
| TYP. INSERTION LOSS | 5.9 dB |
| TX-TX ISOLATION | > 100 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 89 x 400/500 mm |
| WEIGHT | Approx. 7.8/11.3 kg |



PRO-PHY450-3/380-410/SWR

3-Channel Hybrid Ring Combiner for TETRA Communication Radios

- Combiner for parallel operation of three TETRA transceivers on one common antenna where highest possible decoupling (isolation) is necessary.
- Network can be adjusted for optimization of isolation.

- High isolation achievable: Up to -50 dB at the centre frequency (dependent on the SWR of the connected antenna).
- Max. power 50 W per channel.
- Very small ripple on the connectors over the total frequency range.



ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------------|-------------|
| PRO-PHY450-3/380-410/SWR | 210000885 |

SPECIFICATIONS

| ELECTRICAL | |
|---|---|
| MODEL | PRO-PHY450-3/380-410/SWR |
| FILTER TYPE | Hybrid Ring Junction |
| FREQUENCY | 380 - 410 MHz |
| MAX. INPUT POWER | 50 W per channel (max. 150 W with larger load) |
| NOMINAL DIVIDER LOSS | 4.7 dB |
| TOTAL LOSS INCL. SPLITTER LOSS /COUPLER LOSS | < 5.5 dB |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | < 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | N-female (Others on request) |
| DIMENSIONS (L x W x H) | 400 x 182 (incl. connector) x 42 mm |
| WEIGHT | 1500 g |

ISOLATION RESPONSE

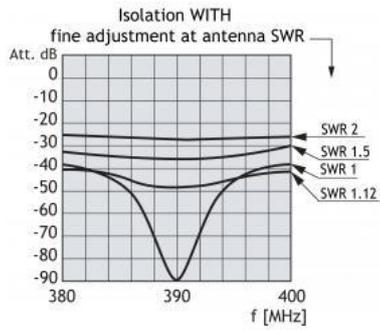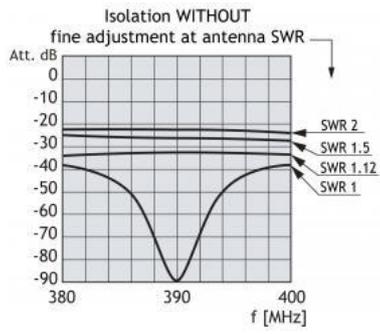



PRO-PHY450-3

3-Channel Hybrid Combiner for 450 MHz Transmitters

- Combining three transmitters or receivers on the same antenna.
- Better utilisation of good antenna position.
- Three antennas on the same transmitter or receiver.

- The only combining option with very small TX-TX frequency spacing.
- 60 W load supplied (other loads or no load as option).

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. | FREQ. RANGE |
|----------------|-------------|---------------|
| PRO-PHY450-3-1 | 210000540 | 395 - 410 MHz |
| PRO-PHY450-3-2 | 210000595 | 405 - 420 MHz |
| PRO-PHY450-3-3 | 210000557 | 415 - 430 MHz |
| PRO-PHY450-3-4 | 210000654 | 425 - 440 MHz |
| PRO-PHY450-3-5 | 210000733 | 435 - 450 MHz |
| PRO-PHY450-3-6 | 210000621 | 445 - 460 MHz |
| PRO-PHY450-3-7 | 210000575 | 455 - 470 MHz |
| PRO-PHY450-3-8 | 210000576 | 465 - 480 MHz |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------------|--|
| FILTER TYPE | Hybrid Junction |
| FREQUENCY | 380 - 475 MHz (see table) |
| MAX. INPUT POWER | 75 W per channel (max. 150 W with larger load) |
| INSERTION LOSS | < 5.3 dB ± 0.3 dB @ 11 MHz BW < 5.5 dB ± 0.3 dB @ 22 MHz BW |
| ISOLATION TX 1-TX 2 (*see note) | > 26 dB @ 11 MHz BW > 25 dB @ 22 MHz BW |
| IMPEDANCE | Nom. 50 Ω |
| LOAD | 30 W load fitted (other ratings available) |
| SWR | < 1.5 with all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female (other types as option) |


| | |
|------------------------|---|
| DIMENSIONS (L x W x H) | 400 x 89 (incl. conn.) x 42 mm (excl. load) |
| WEIGHT | Approx. 1300 g (excl. load) |

*The isolation between the TX ports is directly dependent on the terminating SWR on the antenna port. With an antenna load SWR = 1.5, the isolation between the two TX ports will be reduced to 20 dB @ 5 MHz bandwidth.

**The SWR of the load's should be < 1.1! Each load should be able to dissipate 2/3 of the input power.

E.g.: With 50 W input, each load should be able to dissipate $50 \text{ W} \times 2/3 = 33 \text{ W}$.

TYPICAL RESPONSE CURVE

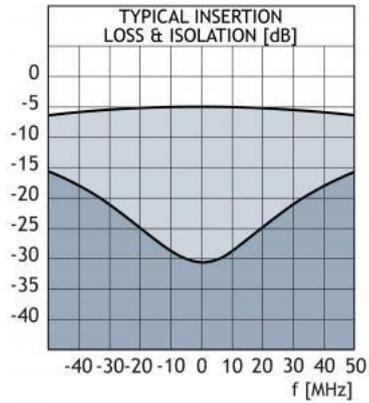



PRO-PHY450-2SI

2-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Single isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...2SI-35) or 100 W (PRO-PHY...2SI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY450-2SI-35 | 210000526 |
| PRO-PHY450-2SI-100 | 210000935 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|--------------------|
| MODEL | PRO-PHY450-2SI-... |
| TX FREQUENCY | 380 - 475 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 20 MHz |
| TYP. INSERTION LOSS | 3.6 dB |
| TX-TX ISOLATION | > 70 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 89 x 400 mm |
| WEIGHT | Approx. 4.6/5.7 kg |



PRO-PHY450-2DI

2-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Dual isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...2DI-35) or 100 W (PRO-PHY...2DI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY450-2DI-35 | 210000609 |
| PRO-PHY450-2DI-100 | 210000562 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|--------------------|
| MODEL | PRO-PHY450-2DI-... |
| TX FREQUENCY | 380 - 475 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 20 MHz |
| TYP. INSERTION LOSS | 4.1 dB |
| TX-TX ISOLATION | > 100 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 483 x 89 x 400 mm |
| WEIGHT | Approx. 5.7/6.8 kg |



PRO-PHY450-2/380-410/SWR

2-Channel Hybrid Ring Combiner for TETRA Communication Radios

- Combiner for coupling of two TETRA transceivers on one common antenna.
- SWR adjustment network for optimization of SWR in the frequency range of 380 to 410 MHz.
- High isolation achievable: Up to -50 dB in the centre frequency (dependant on the SWR of the connected antenna).

- For parallel operation of two two-way communication radios (transceivers) where highest possible decoupling (isolation) is necessary. Via the adjustment network the SWR of the antenna and consequently the isolation between the ports of the combiner can be clearly improved.
- The adjustment of the SWR adjustment network takes place via built-in variable capacitors.
- Max. power 2 x 50 W.
- Very small ripple on the connectors over the total frequency range.



ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------------|-------------|
| PRO-PHY450-2/380-410/SWR | 210000889 |

SPECIFICATIONS

| ELECTRICAL | |
|---|---|
| MODEL | PRO-PHY450-2/380-410/SWR |
| FILTER TYPE | Hybrid Ring Junction |
| FREQUENCY | 380 - 410 MHz |
| MAX. INPUT POWER | 50 W per channel (max. 150 W with larger load) |
| NOMINAL DIVIDER LOSS | 3.0 dB |
| TOTAL LOSS INCL. SPLITTER LOSS /COUPLER LOSS | < 3.5 dB |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | < 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | N-female (Others on request) |
| DIMENSIONS (L x W x H) | 210 x 182 (incl. connector) x 42 mm |
| WEIGHT | 785 g |

ISOLATION RESPONSE

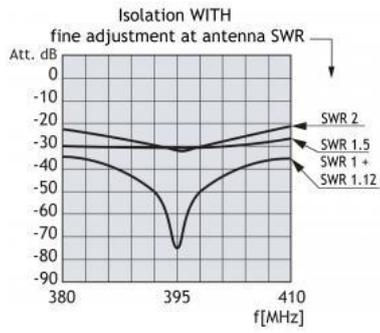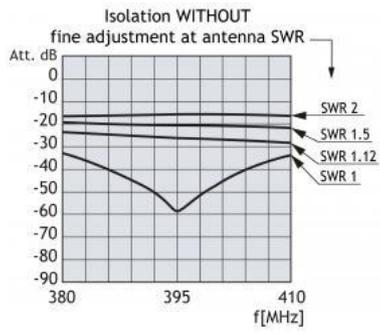



PRO-PHY450-2

2-Channel Hybrid Ring Combiner for 450 MHz Transmitters

- Combining two transmitters or receivers on the same antenna.
- Better utilization of good antenna position.
- Two antennas on the same transmitter or receiver.

- Combining two signal generators.
- The only combining option with very small TX-TX frequency spacing.
- 60 W load supplied (other loads or no load as option).

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. | FREQ. RANGE |
|--------------------|-------------|---------------|
| PRO-PHY450-2-TETRA | 210001126 | 380 - 400 MHz |
| PRO-PHY450-2-1 | 210000580 | 400 - 420 MHz |
| PRO-PHY450-2-2 | 210000546 | 415 - 435 MHz |
| PRO-PHY450-2-3 | 210000579 | 430 - 450 MHz |
| PRO-PHY450-2-4 | 210000542 | 445 - 465 MHz |
| PRO-PHY450-2-5 | 210000570 | 460 - 480 MHz |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------------|--|
| FILTER TYPE | Hybrid Ring Junction |
| FREQUENCY | 380 - 475 MHz (see table) |
| MAX. INPUT POWER | 50 W per channel (max. 150 W with larger load) |
| INSERTION LOSS | < 3.4 dB @ 10 MHz BW < 3.7 dB @ 20 MHz BW |
| ISOLATION TX 1-TX 2 (*see note) | > 35 dB @ 10 MHz BW > 30 dB @ 20 MHz BW |
| IMPEDANCE | Nom. 50 Ω |
| LOAD (**see note) | 30 W load fitted (other ratings available) |
| SWR | < 1.5 with all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female (other types as option) |
| DIMENSIONS (L x W x H) | 216 x 89 (incl. conn.) x 42 mm (excl. load) |
| | |


| | |
|--------|----------------------------|
| WEIGHT | Approx. 700 g (excl. load) |
|--------|----------------------------|


*The isolation between the TX ports is directly dependent on the terminating SWR on the antenna port. With an antenna load SWR = 1.5, the isolation between the two TX ports will be reduced to 20 dB @ 5 MHz bandwidth.

**The SWR of the loads should be < 1.1! The load should be able to dissipate 1/2 of the total input power.

E.g.: With 50 W input in total for the two channels, the load should be able to dissipate $50 \text{ W} \times 1/2 = 25 \text{ W}$.

RESPONSE CURVE

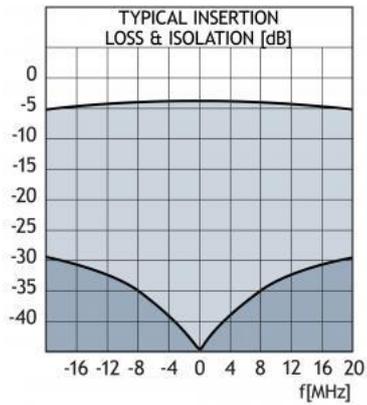

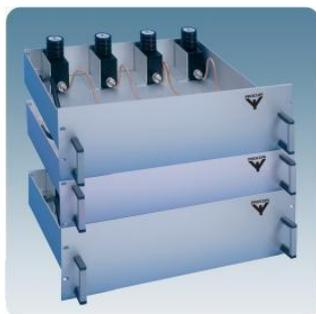

PRO-PHY150-8SI

8-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.
- Single isolators fitted as standard.

- A range of racks and cabinets are available.
- Option: Maximum input power of 35 W (PRO-PHY...-8SI-35) or 100 W (PRO-PHY...-8SI-100).
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY150-8SI-35 | 210001211 |
| PRO-PHY150-8SI-100 | 210001212 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|---|
| MODEL | PRO-PHY150-8SI-... |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 7 MHz |
| TYP. INSERTION LOSS | 11.1 dB |
| TX-TX ISOLATION | > 65 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 8 HU x 400 mm (483 x 356 x 400 mm) |
| WEIGHT | Approx. 30 kg |





PRO-PHY150-6DI-100

6-Channel Hybrid Combiner for 100 W

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.
- Dual isolators fitted as standard.

- Maximum input power of 100 W.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY150-6DI-100 | 210000922 |

SPECIFICATIONS

| ELECTRICAL | |
|---|--|
| MODEL | PRO-PHY150-6DI-100 |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 100 W |
| TX-TX SPACING, Δ TX | < 7 MHz |
| TYP. INSERTION LOSS | 9.0 dB |
| TX-TX ISOLATION | > 90 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (H x W x L) (H x W x L) Alternative | 6HU x 483 x 500 mm (267 x 483 x 500 mm) 8HU x 483 x 400 mm (356 x 483 x 500 mm) |
| WEIGHT | Approx. 25 kg |



PRO-PHY150-5SI3

5-Channel Hybrid Combiner with single isolator

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.

- Single isolators fitted as standard.
- A range of racks and cabinets are available.
- Option: Maximum input power of 35 W (PRO-PHY150-5SI3-35) or 100 W (PRO-PHY150-5SI3-100).


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---------------------|-------------|
| PRO-PHY150-5SI3-35 | 210000916 |
| PRO-PHY150-5SI3-100 | 210000917 |


SPECIFICATIONS

| ELECTRICAL | |
|------------------------|------------------------|
| MODEL | PRO-PHY150-5SI3-... |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 7 MHz |
| TYP. INSERTION LOSS | 8.6 dB |
| TX-TX ISOLATION | > 70 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 400/500 x 483 x 133 mm |
| WEIGHT | Approx. 7.3/11.8 kg |

TYPICAL RESPONSE CURVES No 1.

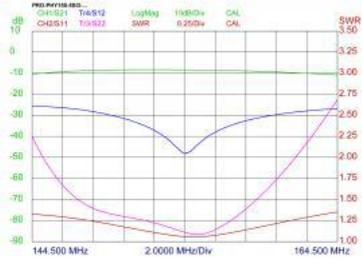

TYPICAL RESPONSE CURVES No 2.

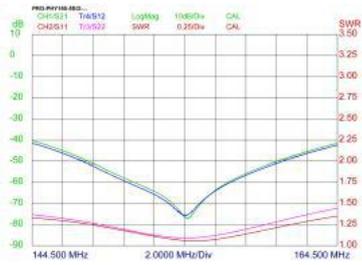



PRO-PHY150-5DI3

5-Channel Hybrid Combiner with dual isolator

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.

- Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Option: Maximum input power of 35 W (PRO-PHY150-5DI3-35) or 100 W (PRO-PHY150-5DI3-100).

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---------------------|-------------|
| PRO-PHY150-5DI3-35 | 210000918 |
| PRO-PHY150-5DI3-100 | 210000919 |

Please specify the frequencies for TX when ordering.

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|---|
| MODEL | PRO-PHY150-5DI3-... |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 7 MHz |
| TYP. INSERTION LOSS | 9 dB |
| TX-TX ISOLATION | > 100 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 400/500 x 483 x 133 mm / 15.75/19.69 x 19.02 x 5.24 in. |
| WEIGHT | Approx. 9.4/14.0 kg / 20.72/30.86 lb. |



PRO-PHY150-5

5-Channel Hybrid Combiner for 150 MHz Transmitters

- Combining five transmitters or receivers on the same antenna.
- Better utilization of good antenna position.
- Five antennas on the same transmitter or receiver.

- The only combining option with very small TX-TX frequency spacing.
- 60 W load supplied (other loads or no load as option).

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. | FREQ. RANGE |
|-----------------|-------------|---------------|
| PRO-PHY150-5-1 | 210001231 | 136 - 141 MHz |
| PRO-PHY150-5-2 | 210001232 | 140 - 145 MHz |
| PRO-PHY150-5-3 | 210001233 | 144 - 149 MHz |
| PRO-PHY150-5-4 | 210001234 | 148 - 153 MHz |
| PRO-PHY150-5-5 | 210001235 | 152 - 157 MHz |
| PRO-PHY150-5-6 | 210001236 | 156 - 161 MHz |
| PRO-PHY150-5-7 | 210001129 | 160 - 165 MHz |
| PRO-PHY150-5-8 | 210001131 | 164 - 169 MHz |
| PRO-PHY150-5-9 | 210001237 | 168 - 173 MHz |
| PRO-PHY150-5-10 | 210001238 | 172 - 175 MHz |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------------|---|
| MODEL | PRO-PHY150-5 |
| FILTER TYPE | Hybrid Junction |
| FREQUENCY | 136 - 175 MHz (see table) |
| MAX. INPUT POWER | 75 W per channel (max. 150 W with larger load) |
| INSERTION LOSS | < 8.2 dB ± 0.5 dB @ 8 MHz BW < 8.3 dB ± 0.5 dB @ 16 MHz BW |
| ISOLATION TX 1-TX 2 (*see note) | > 32 dB @ 8 MHz BW > 27 dB @ 16 MHz BW |
| IMPEDANCE | Nom. 50 Ω |
| LOAD (**see note) | 30 W load fitted (other ratings available) |
| SWR | < 1.5 with all other ports terminated with 50 Ω |


| MECHANICAL | |
|------------------------|---|
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female (other types as option) |
| DIMENSIONS (L x W x H) | 420 x 89 (incl. conn.) x 42 mm (excl. load) |
| WEIGHT | Approx. 1600 g (excl. load) |

*The isolation between the TX ports is directly dependent on the terminating SWR on the antenna port. With an antenna load SWR = 1.5, the isolation between the two TX ports will be reduced to 20 dB @ 5 MHz bandwidth.

**The SWR of the load's should be < 1.1! Each load should be able to dissipate 4/5 of the input power.

E.g.: With 50 W input, each load should be able to dissipate $50 \text{ W} \times 4/5 = 40 \text{ W}$.

TYPICAL RESPONSE CURVE

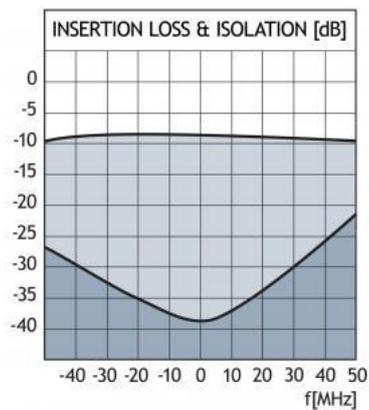



PRO-PHY150-4SI

4-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Single isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...4SI-35) or 100 W (PRO-PHY...4SI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY150-4SI-35 | 210000569 |
| PRO-PHY150-4SI-100 | 210000934 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|-----------------------|
| MODEL | PRO-PHY150-4SI-... |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 7 MHz |
| TYP. INSERTION LOSS | 6.6 dB |
| TX-TX ISOLATION | > 70 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 400/500 x 483 x 89 mm |
| WEIGHT | Approx. 7.3/11.8 kg |



PRO-PHY150-4DI

4-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Dual isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...4DI-35) or 100 W (PRO-PHY...4DI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY150-4DI-35 | 210000565 |
| PRO-PHY150-4DI-100 | 210000534 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|-----------------------|
| MODEL | PRO-PHY150-4DI-... |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 7 MHz |
| TYP. INSERTION LOSS | 6.9 dB |
| TX-TX ISOLATION | > 100 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 400/500 x 483 x 89 mm |
| WEIGHT | Approx. 9.4/14.0 kg |



PRO-PHY150-4

4-Channel Hybrid Combiner for 150 MHz Transmitters

- Combining four transmitters or receivers on the same antenna.
- Better utilization of good antenna position.
- Four antennas on the same transmitter or receiver.

- The only combining option with very small TX-TX frequency spacing.
- 60 W load supplied (other loads or no load as option).

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. | FREQUENCY |
|----------------|-------------|---------------|
| PRO-PHY150-4-3 | 210000632 | 130 - 160 MHz |
| PRO-PHY150-4-5 | 210000672 | 140 - 170 MHz |
| PRO-PHY150-4-8 | 210000558 | 150 - 180 MHz |

SPECIFICATIONS


| ELECTRICAL | |
|------------------------------------|--|
| FILTER TYPE | Hybrid Junction |
| FREQUENCY | 136 - 175 MHz (see table) |
| MAX. INPUT POWER | 65 W per channel (max. 150 W with larger load) |
| INSERTION LOSS | < 6.3 dB ± 0.3 dB |
| ISOLATION TX 1-TX 2 (*see note) | > 30 dB |
| IMPEDANCE | Nom. 50 Ω |
| LOAD (**see note) | 30 W load fitted (other ratings available) |
| SWR | < 1.5 with all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female (other types as option) |
| DIMENSIONS (L x W x H) | 420 x 89 (incl. conn.) x 42 mm (excl. load) |
| WEIGHT | Approx. 1330 g (excl. load) |

*The isolation between the TX ports is directly dependent on the terminating SWR on the antenna port. With an antenna load SWR = 1.5, the isolation between the two TX ports will be reduced to 20 dB @ 5 MHz bandwidth.

**The SWR of the load's should be < 1.1! Each load should be able to dissipate 3/4 of the input power.

E.g.: With 50 W input, each load should be able to dissipate $50 \text{ W} \times 3/4 = 37 \text{ W}$.

TYPICAL RESPONSE CURVE

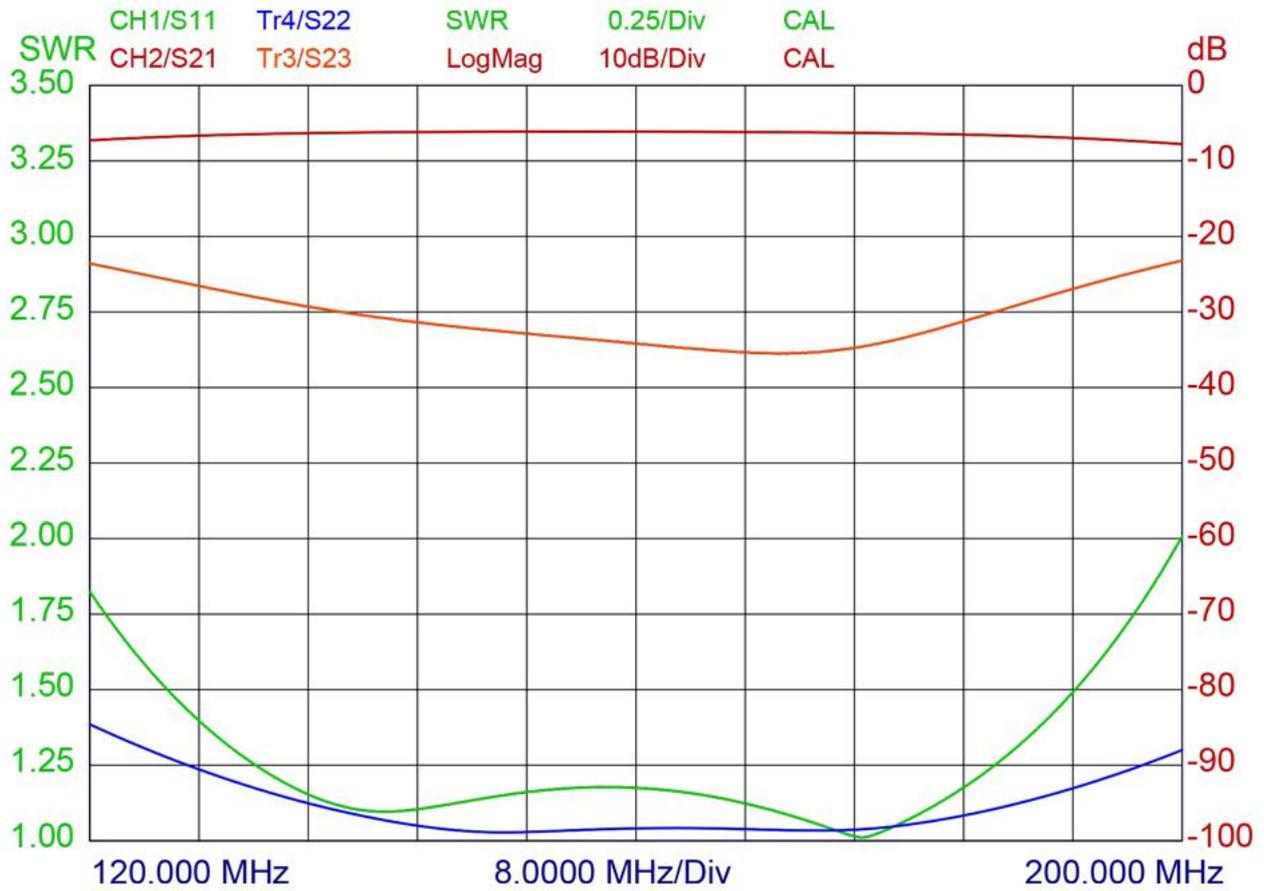



PRO-PHY150-3SI

3-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Single isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...3SI-35) or 100 W (PRO-PHY...3SI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY150-3SI-35 | 210000564 |
| PRO-PHY150-3SI-100 | 210000932 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|-----------------------|
| MODEL | PRO-PHY150-3SI-... |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 7 MHz |
| TYP. INSERTION LOSS | 5.5 dB |
| TX-TX ISOLATION | > 70 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 400/500 x 483 x 89 mm |
| WEIGHT | Approx. 6.2/9.7 kg |



PRO-PHY150-3DI

3-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Dual isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...3DI-35) or 100 W (PRO-PHY...3DI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY150-3DI-35 | 210000704 |
| PRO-PHY150-3DI-100 | 210000933 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|-----------------------|
| MODEL | PRO-PHY150-3DI-... |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 7 MHz |
| TYP. INSERTION LOSS | 5.8 dB |
| TX-TX ISOLATION | > 100 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 400/500 x 483 x 89 mm |
| WEIGHT | Approx. 7.8/11.3 kg |



PRO-PHY150-3

3-Channel Hybrid Combiner for 150 MHz Transmitters

- Combining three transmitters or receivers on the same antenna.
- Better utilization of good antenna position.
- Three antennas on the same transmitter or receiver.

- The only combining option with very small TX-TX frequency spacing.
- 60 W load supplied (other loads or no load as option).

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. | FREQUENCY |
|----------------|-------------|---------------|
| PRO-PHY150-3-1 | 210001225 | 130 - 142 MHz |
| PRO-PHY150-3-2 | 210000639 | 138 - 150 MHz |
| PRO-PHY150-3-3 | 210000611 | 146 - 158 MHz |
| PRO-PHY150-3-4 | 210000547 | 154 - 166 MHz |
| PRO-PHY150-3-5 | 210000583 | 162 - 174 MHz |
| PRO-PHY150-3-6 | 210000793 | 170 - 182 MHz |

SPECIFICATIONS


| ELECTRICAL | |
|------------------------------------|---|
| FILTER TYPE | Hybrid Junction |
| FREQUENCY | 136 - 175 MHz (see table) |
| MAX. INPUT POWER | 75 W per channel (max. 150 W with larger load) |
| INSERTION LOSS | < 5.2 dB ± 0.3 dB @ 8 MHz BW < 5.4 dB ± 0.3 dB @ 16 MHz BW |
| ISOLATION TX 1-TX 2 (*see note) | > 26 dB @ 8 MHz BW > 25 dB @ 16 MHz BW |
| IMPEDANCE | Nom. 50 Ω |
| LOAD (**see note) | 30 W load fitted (other ratings available) |
| SWR | < 1.5 with all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female (other types as option) |
| DIMENSIONS (L x W x H) | 400 x 89 (incl. conn.) x 42 mm (excl. loads) |
| WEIGHT | Approx. 1300 g (excl. load) |

*The isolation between the TX ports is directly dependent on the terminating SWR on the antenna port. With an antenna load SWR = 1.5, the isolation between the two TX ports will be reduced to 20 dB @ 5 MHz bandwidth.

**The SWR of the load's should be < 1.1! Each load should be able to dissipate 2/3 of the input power.

E.g.: With 50 W input, each load should be able to dissipate $50 \text{ W} \times 2/3 = 33 \text{ W}$.

TYPICAL RESPONSE CURVE

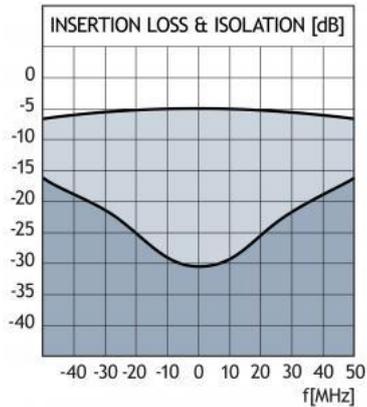



PRO-PHY150-2SI

2-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Single isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...2SI-35) or 100 W (PRO-PHY...2SI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY150-2SI-35 | 210000528 |
| PRO-PHY150-2SI-100 | 210000915 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|--------------------|
| MODEL | PRO-PHY150-2SI-... |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 7 MHz |
| TYP. INSERTION LOSS | 3.5 dB |
| TX-TX ISOLATION | > 70 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 400 x 483 x 89 mm |
| WEIGHT | Approx. 4.6/5.7 kg |



PRO-PHY150-2DI

2-Channel Hybrid Combiner

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
 - All hybrid combiners are suitable for 19" rack mounting.
 - Dual isolators fitted as standard.
-
- A range of racks and cabinets are available.
 - Option: Maximum input power of 35 W (PRO-PHY...2DI-35) or 100 W (PRO-PHY...2DI-100).
 - Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-PHY150-2DI-35 | 210000531 |
| PRO-PHY150-2DI-100 | 210000620 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|--------------------|
| MODEL | PRO-PHY150-2DI-... |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 35/100 W |
| TX-TX SPACING, Δ TX | < 7 MHz |
| TYP. INSERTION LOSS | 4.1 dB |
| TX-TX ISOLATION | > 100 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 400 x 483 x 89 mm |
| WEIGHT | Approx. 5.7/6.8 kg |



PRO-PHY150-2

2-Channel Hybrid Ring Combiner for 150 MHz Transmitters

- Combining two transmitters or receivers on the same antenna.
- Better utilization of good antenna position.
- Two antennas on the same transmitter or receiver.

- Combining two signal generators.
- The only combining option with very small TX-TX frequency spacing.
- 30 W load supplied (other loads or no load as option).

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. | FREQUENCY |
|-----------------|-------------|---------------|
| PRO-PHY150-2-1 | 210000538 | 136 - 142 MHz |
| PRO-PHY150-2-2 | 210000878 | 140 - 146 MHz |
| PRO-PHY150-2-3 | 210000590 | 144 - 150 MHz |
| PRO-PHY150-2-4 | 210000544 | 148 - 154 MHz |
| PRO-PHY150-2-5 | 210000571 | 152 - 158 MHz |
| PRO-PHY150-2-6 | 210000572 | 156 - 162 MHz |
| PRO-PHY150-2-7 | 210000537 | 160 - 166 MHz |
| PRO-PHY150-2-8 | 210000545 | 164 - 170 MHz |
| PRO-PHY150-2-9 | 210000548 | 168 - 174 MHz |
| PRO-PHY150-2-10 | 210000629 | 172 - 178 MHz |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------------|---|
| FILTER TYPE | Hybrid Ring Junction |
| FREQUENCY | 136 - 175 MHz (see table) |
| MAX. INPUT POWER | 50 W per channel (max. 150 W with larger load) |
| INSERTION LOSS | < 3.3 dB @ 3 MHz BW < 3.5 dB @ 6 MHz BW |
| ISOLATION TX 1-TX 2 (*see note) | > 35 dB @ 3 MHz BW > 30 dB @ 6 MHz BW |
| IMPEDANCE | Nom. 50 Ω |
| LOAD (**see note) | 30 W load fitted (other ratings available) |
| SWR | < 1.5 with all other ports terminated with 50 |
| MECHANICAL | |


| | |
|------------------------|---|
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female (other types as option) |
| DIMENSIONS (L x W x H) | 216 x 89 (incl. conn.) x 42 mm (excl. load) |
| WEIGHT | Approx. 700 g (excl. load) |

*The isolation between the TX ports is directly dependent on the terminating SWR on the antenna port. With an antenna load SWR = 1.5, the isolation between the two TX ports will be reduced to 20 dB @ 3 MHz bandwidth.

**The SWR of the load's should be < 1.1! The load should be able to dissipate 1/2 of the total input power.

E.g.: With 50 W input in total for the two channels, the load should be able to dissipate 50 W x 1/2 = 25 W.

TYPICAL RESPONSE CURVE

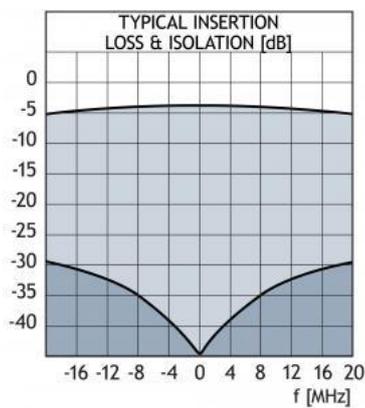



PRO-ISO-PHY-TETRA-ELW

Two TMO TETRA Mobile-Station and one DMO TETRA Mobile Station

- The PRO-ISO-PHY-TETRA-ELW combiner provides the possibility of connecting up to two TMO TETRA radios into one common antenna.
- ETSI compliant connection of two digital radios.

DESCRIPTION

- The PRO-ISO-PHY-TETRA-ELW supports Direct Mode Operation (DMO), giving one TETRA mobile radio the ability to communicate in direct mode.
- The PRO-ISO-PHY-TETRA-ELW is the successor to the PRO-MIX-PHY-TETRA-ELW-N-2RXI.
- The PRO-ISO-PHY-TETRA-ELW has improved isolation between the ports - more than 60 dB - and lower insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- Built-in high-pass filter, for attenuating interference from 150 - 174 MHz and 74 - 87.5 MHz bands.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Also available in tray for 19" rack mounting.
- Vibration and shock tested in accordance with EN-60068**.

**Tested in accordance with:

Random test: EN 60068-2-64, test specification: EN 300 019-2-5 V3.0.0.

Shock test: EN 60068-2-27, test specification: EN 300 019-2-5 V3.0.0.

Bump test: EN 60068-2-29, test specification: EN 300 019-2-5 V3.0.0.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|----------------------------|-------------|
| PRO-ISO-PHY-TETRA-ELW-N(f) | 210001983 |

Compatible DMO-modes

The PRO-ISO-PHY-TETRA-ELW is compatible with the following DMO modes in 406 - 410 MHz band:


- DM-MS
- DM-REP (1A)

SPECIFICATIONS


| ELECTRICAL | |
|---------------------------|--|
| MODEL | PRO-ISO-PHY-TETRA-ELW |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 380 - 385 MHz RX: 390 - 395 MHz |
| DMO FREQUENCY * | 406 - 410 MHz |
| INSERTION LOSS TX-ANT. | < 8.0 dB (Typ. 6.5 - 8.0 dB) |

| | |
|---------------------------|--|
| INSERTION LOSS RX-ANT. | < 8.0 dB (Typ. 6.5 - 8.0 dB) |
| INSERTION LOSS DMO-ANT | < 2.5 dB (Typ. 2.4 dB) |
| ISOLATION TRX → TRX | TX - TX: > 60 dB (380 - 385 MHz) RX - RX: > 60 dB (390 - 395 MHz) TX - RX / RX - TX: > 60 dB |
| ISOLATION DMO-TMO | > 60 dB |
| MAX. POWER | 25 W / station |
| SWR | < 1.5 |
| GROUP DELAY VARIATION | TX-ANT. : < 120 nsec. RX-ANT. : < 150 nsec. |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Black |
| DIMENSIONS (L x W x H) | 190 (excl. conn.) x 240 x 65 mm / 7.48 (excl. conn.) x 9.45 x 2.56 in. |
| WEIGHT | Approx. 3700 g / 8.16 lb. |
| ENVIRONMENTAL | |
| IP-GRADE | IP-62 |


TYPICAL ATTENUATION VALUES

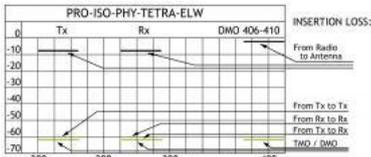

The built-in high-pass filter attenuates large signal interference and harmonic from radiosystems below 174 MHz.

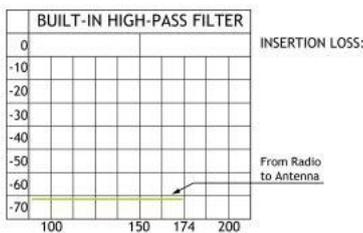

CONNECTION DIAGRAM

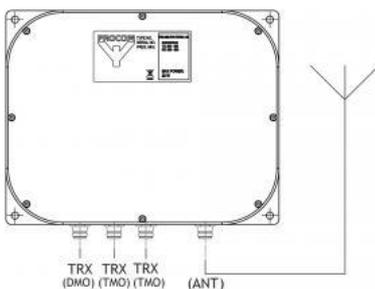





PRO-ISO-PHY-TETRA-8

Eight-TETRA-Station Combiner

- The PRO-ISO-PHY-TETRA-8 combiner provides the possibility of connecting up to eight TETRA radios into one common antenna.
- ETSI compliant connection of eight digital radios.

DESCRIPTION

- The PRO-ISO-PHY-TETRA-8 has improved isolation between the ports - more than 60 dB - and low insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Also available in tray for 19" rack mounting.
- Vibration and shock tested in accordance with EN-60068 **.
- Jumper cables included.

** Tested in accordance with:

Random test: EN 60068-2-64, test specification: EN 300 019-2-5 V3.0.0.

Shock test: EN 60068-2-27, test specification: EN 300 019-2-5 V3.0.0.

Bump test: EN 60068-2-29, test specification: EN 300 019-2-5 V3.0.0.

ORDERING DESIGNATIONS


| TYPE | TX MHZ | RX MHZ | PRODUCT NO. |
|---------------------------------|-----------|-----------|--------------------------|
| PRO-ISO-PHY-385/390-8-N(f) | 380 - 385 | 390 - 395 | Contact for availability |
| PRO-ISO-PHY-385/390-8-TR-B-N(f) | 380 - 385 | 390 - 395 | Contact for availability |
| PRO-ISO-PHY-385/390-8-TR-F-N(f) | 380 - 385 | 390 - 395 | Contact for availability |
| PRO-ISO-PHY-415/420-8-N(f) | 410 - 415 | 420 - 425 | Contact for availability |
| PRO-ISO-PHY-415/420-8-TR-B-N(f) | 410 - 415 | 420 - 425 | Contact for availability |
| PRO-ISO-PHY-415/420-8-TR-F-N(f) | 410 - 415 | 420 - 425 | Contact for availability |

SPECIFICATIONS


| ELECTRICAL | |
|-----------------|--|
| MODEL | PRO-ISO-PHY-TETRA-8 |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 380 - 385 MHz RX: 390 - 395 MHz or TX: 410 - 415 MHz RX: 420 - 425 MHz |

| | |
|---------------------------|--|
| INSERTION LOSS TX-ANT. | Typ. -11.5 to -13 dB |
| INSERTION LOSS RX-ANT. | Typ. -11.5 to -13 dB |
| ISOLATION TRX → TRX | TX - TX: > 60 dB (380 - 385 MHz & 410 - 415 MHz) RX - RX: > 60 dB (390 - 395 MHz & 420 - 425 MHz) TX - RX / RX - TX: > 60 dB |
| SWR | < 1.5 |
| MAX. POWER | 25 W / station |
| GROUP DELAY VARIATION | TX-ANT. < 120 nsec. RX-ANT. < 150 nsec. |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Black |
| DIMENSIONS (W x H x D) | 19" x 2 x 2 HU x 240 mm (excl. conn.) (483 x 176 x 240 mm) / (7.02 x 6.93 x 9.45 in.) |
| WEIGHT | Approx. 12.6 kg / 27.78 lb. |
| ENVIRONMENTAL | |
| IP RATING | IP 62 |


TYPICAL ATTENUATION VALUES

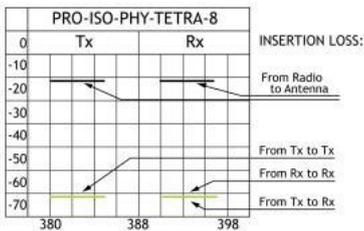

CONNECTION DIAGRAM

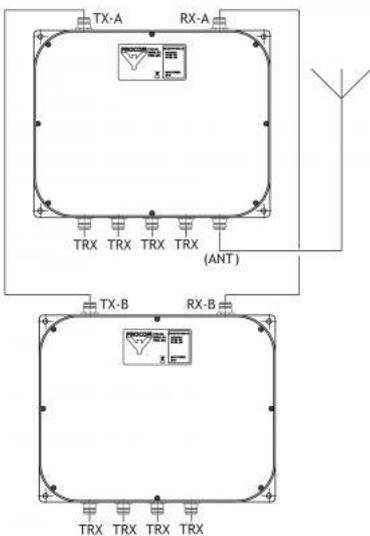

MOUNTING DETAILS

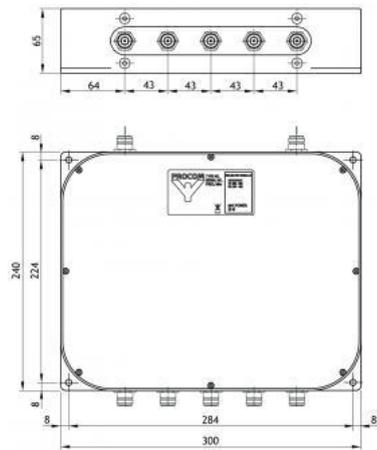



PRO-ISO-PHY-TETRA-6

Six-TETRA-Station Combiner

- The PRO-ISO-PHY-TETRA-6 combiner provides the possibility of connecting up to six TETRA radios into one common antenna.
- ETSI compliant connection of six digital radios.

DESCRIPTION

- The PRO-ISO-PHY-TETRA-6 has improved isolation between the ports - more than 60 dB - and low insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Also available in tray for 19" rack mounting.
- Jumper cables included.

ORDERING DESIGNATIONS

| TYPE | TX MHZ | RX MHZ | PRODUCT NO. |
|---------------------------------|-----------|-----------|-------------|
| PRO-ISO-PHY-385/390-6-N(f) | 380 - 385 | 390 - 395 | 210002160 |
| PRO-ISO-PHY-385/390-6-TR-B-N(f) | 380 - 385 | 390 - 395 | 210002154 |
| PRO-ISO-PHY-385/390-6-TR-F-N(f) | 380 - 385 | 390 - 395 | 210002161 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|--|
| MODEL | PRO-ISO-PHY-TETRA-6 |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 380 - 385 MHz RX: 390 - 395 MHz |
| INSERTION LOSS TX-ANT. | Typ. -11.5 to -13 dB |
| INSERTION LOSS RX-ANT. | Typ. -11.5 to -13 dB |
| ISOLATION TRX → TRX | TX - TX: > 60 dB (380 - 385 MHz) RX - RX: > 60 dB (390 - 395 MHz) TX - RX / RX - TX: > 60 dB |
| SWR | < 1.5 |
| MAX. POWER | 25 W/station |
| GROUP DELAY VARIATION | TX-ANT. < 120 nsec. RX-ANT. < 150 nsec. |
| MECHANICAL | |



| | |
|-----------------------|---|
| CONNECTOR TYPE | N-female |
| COLOUR | Black |
| DIMENSIONS (W x H xD) | 19" x 2 x 2 HU x 240 mm (excl. conn.) (483 x 176 x 240 mm) |
| WEIGHT | Approx. 11400 g / 25.14 lb. |
| ENVIRONMENTAL | |
| IP-GRADE | IP-62 |



PRO-ISO-PHY-TETRA-4

Four-TETRA-Station Combiner

- The PRO-ISO-PHY-TETRA-4 combiner provides the possibility of connecting up to four TETRA radios into one common antenna.
- The PRO-ISO-PHY-TETRA-4 models are available in the frequency range 380 - 420 MHz.

DESCRIPTION

- ETSI compliant connection of four digital radios.
- The PRO-ISO-PHY-TETRA-4 is the successor to the PRO-MIX-PHY-TETRA-N-4RXI.
- The PRO-ISO-PHY-TETRA-4 has improved isolation between the ports - more than 60 dB - and lower insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Also available in tray for 19" rack mounting.
- Vibration and shock tested in accordance with EN-60068**.

**Tested in accordance with:

Random test: EN 60068-2-64, test specification: EN 300 019-2-5 V3.0.0.

Shock test: EN 60068-2-27, test specification: EN 300 019-2-5 V3.0.0.

Bump test: EN 60068-2-29, test specification: EN 300 019-2-5 V3.0.0.


ORDERING DESIGNATIONS

| TYPE | TX MHz | RX MHz | PRODUCT NO. |
|--|-----------|-----------|-------------|
| PRO-ISO-PHY-385/390-4-N(f) | 380 - 385 | 390 - 395 | 210001945 |
| PRO-ISO-PHY-385/390-4-TR-F-N(f) | 380 - 385 | 390 - 395 | 210002008 |
| PRO-ISO-PHY-385/390-4-TR-B-N(f) | 380 - 385 | 390 - 395 | 210002009 |
| PRO-ISO-PHY-415/420-4-N(f) | 410 - 415 | 420 - 425 | 210002035 |
| PRO-ISO-PHY-415/420-4-TR-F-N(f) | 410 - 415 | 420 - 425 | 210002091 |
| PRO-ISO-PHY-415/420-4-TR-B-N(f) | 410 - 415 | 420 - 425 | 210002092 |
| ACCESSORIES | | | |
| 19" Front plate with connectors in front | | | 210002005 |
| 19" Front plate with connectors in back | | | 210002006 |

PRO-ISO-PHY-TETRA-4-TR-F-N(f)



PRO-ISO-PHY-TETRA-4-TR-B-N(f)

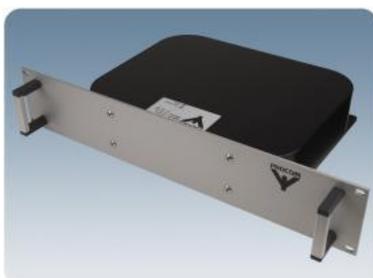

SPECIFICATIONS


| ELECTRICAL | |
|---------------------------|--|
| MODEL | PRO-ISO-PHY-TETRA-4 |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 380 - 385 MHz RX: 390 - 395 MHz or TX: 410 - 415 MHz RX: 420 - 425 MHz |
| INSERTION LOSS TX-ANT. | < 9.7 Typ. 8.5 to 9.5 dB |
| INSERTION LOSS RX-ANT. | < 9.7 Typ. 8.5 to 9.5 dB |
| ISOLATION TRX → TRX | TX - TX: > 60 dB (380 - 385 MHz & 410 - 415 MHz) RX - RX: > 60 dB (390 - 395 MHz & 420 - 425 MHz) TX - RX / RX - TX: > 60 dB |
| SWR | < 1.5 |
| MAX. POWER | 25 W/station |
| GROUP DELAY VARIATION | TX-ANT. < 120 nsec. RX-ANT. < 150 nsec. |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Black |
| DIMENSIONS (L x W x H) | 300 (excl. conn.) x 240 x 65 mm / 11.81 (excl. conn.) x 9.45 x 2.56 in. |
| WEIGHT | Approx. 6300 g / 13.89 lb. |

ENVIRONMENTAL


IP-GRADE

IP-62


TYPICAL ATTENUATION VALUES

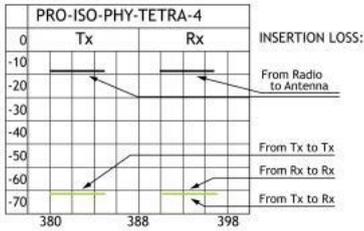

CONNECTION DIAGRAM

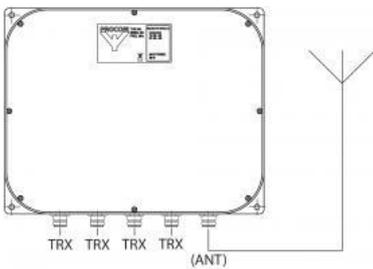

MOUNTING DETAILS

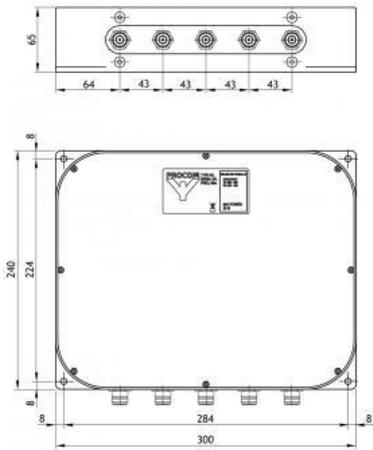



PRO-ISO-PHY-TETRA-3

Three-TETRA-Station Combiner

- The PRO-ISO-PHY-TETRA-3 combiner provides the possibility of connecting up to three TETRA radios into one common antenna.
- The PRO-ISO-PHY-TETRA-3 models are available in the frequency range 380 - 420 MHz.

DESCRIPTION

- ETSI compliant connection of four digital radios.
- The PRO-ISO-PHY-TETRA-3 has improved isolation between the ports - more than 60 dB - and low insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Also available in tray for 19" rack mounting.
- Vibration and shock tested in accordance with EN-60068**.

**Tested in accordance with:

Random test: EN 60068-2-64, test specification: EN 300 019-2-5 V3.0.0.

Shock test: EN 60068-2-27, test specification: EN 300 019-2-5 V3.0.0.

Bump test: EN 60068-2-29, test specification: EN 300 019-2-5 V3.0.0.


ORDERING DESIGNATIONS

| TYPE | TX MHZ | RX MHZ | PRODUCT NO. |
|--|-----------|-----------|-------------|
| PRO-ISO-PHY-385/390-3-N(f) | 380 - 385 | 390 - 395 | 210002037 |
| PRO-ISO-PHY-385/390-3-TR-F-N(f) | 380 - 385 | 390 - 395 | 210002066 |
| PRO-ISO-PHY-385/390-3-TR-B-N(f) | 380 - 385 | 390 - 395 | 210002067 |
| PRO-ISO-PHY-415/420-3-N(f) | 410 - 415 | 420 - 425 | 210002117 |
| PRO-ISO-PHY-415/420-3-TR-F-N(f) | 410 - 415 | 420 - 425 | 210002118 |
| PRO-ISO-PHY-415/420-3-TR-B-N(f) | 410 - 415 | 420 - 425 | 210002119 |
| ACCESSORIES | | | |
| 19" Front plate with connectors in front | | | 210002005 |
| 19" Front plate with connectors in back | | | 210002006 |

PRO-ISO-PHY-TETRA-3-TR-F-N(f)



PRO-ISO-PHY-TETRA-3-TR-B-N(f)

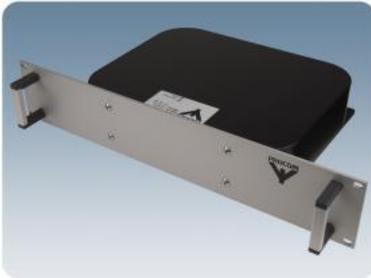

SPECIFICATIONS


| ELECTRICAL | |
|---------------------------|--|
| MODEL | PRO-ISO-PHY-TETRA-3 |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 380 - 385 MHz RX: 390 - 395 MHz or TX: 410 - 415 MHz RX: 420 - 425 MHz |
| INSERTION LOSS TX-ANT. | < 9.7 Typ. 8.5 to 9.5 dB |
| INSERTION LOSS RX-ANT. | < 9.7 Typ. 8.5 to 9.5 dB |
| ISOLATION TRX → TRX | TX - TX: > 60 dB (380 - 385 MHz & 410 - 415 MHz) RX - RX: > 60 dB (390 - 395 MHz & 420 - 425 MHz) TX - RX / RX - TX: > 60 dB |
| SWR | < 1.5 |
| MAX. POWER | 25 W/station |
| GROUP DELAY VARIATION | TX-ANT. < 120 nsec. RX-ANT. < 150 nsec. |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Black |
| DIMENSIONS (L x W x H) | 300 (excl. conn.) x 240 x 65 mm / 11.81 (excl. conn.) x 9.45 x 2.56 in. |
| WEIGHT | Approx. 5700 g / 12.57 lb. |

ENVIRONMENTAL


IP-GRADE

IP-62


TYPICAL ATTENUATION VALUES

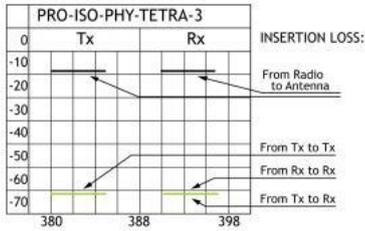

CONNECTION DIAGRAM

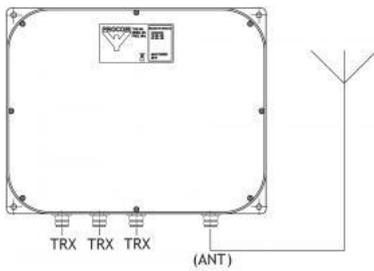

MOUNTING DETAILS

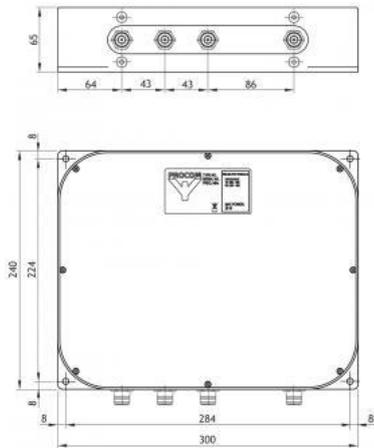



PRO-ISO-PHY-TETRA-2

Two-TETRA-Station Combiner

- The PRO-ISO-PHY-TETRA-2 combiner provides the possibility of connecting up to two TETRA radios into one common antenna.
- The PRO-ISO-PHY-TETRA-2 models are available in the frequency range 380 - 420 MHz.

DESCRIPTION

- ETSI compliant connection of two digital radios.
- The PRO-ISO-PHY-TETRA-2 is the successor to the PRO-MIX-PHY-TETRA-N-2RXI.
- The PRO-ISO-PHY-TETRA-2 has improved isolation between the ports - more than 60 dB - and lower insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Also available in tray for 19" rack mounting.
- Vibration and shock tested in accordance with EN-60068**.

**Tested in accordance with:

Random test: EN 60068-2-64, test specification: EN 300 019-2-5 V3.0.0.

Shock test: EN 60068-2-27, test specification: EN 300 019-2-5 V3.0.0.

Bump test: EN 60068-2-29, test specification: EN 300 019-2-5 V3.0.0.


ORDERING DESIGNATIONS

| TYPE | TX MHZ | RX MHZ | PRODUCT NO. |
|--|-----------|-----------|-------------|
| PRO-ISO-PHY-385/390-2-N(f) | 380 - 385 | 390 - 395 | 210001982 |
| PRO-ISO-PHY-385/390-2-TR-F-N(f) | 380 - 385 | 390 - 395 | 210002045 |
| PRO-ISO-PHY-385/390-2-TR-B-N(f) | 380 - 385 | 390 - 395 | 210002046 |
| PRO-ISO-PHY-415/420-2-N(f) | 410 - 415 | 420 - 425 | 210002114 |
| PRO-ISO-PHY-415/420-2-TR-F-N(f) | 410 - 415 | 420 - 425 | 210002115 |
| PRO-ISO-PHY-415/420-2-TR-B-N(f) | 410 - 415 | 420 - 425 | 210002116 |
| ACCESSORIES | | | |
| 19" Front plate with connectors in front | | | 210002032 |
| 19" Front plate with connectors in back | | | 210002030 |

PRO-ISO-PHY-TETRA-2-TR-F-N(f)



PRO-ISO-PHY-TETRA-2-TR-B-N(f)

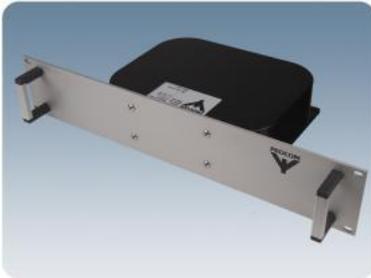

SPECIFICATIONS


| ELECTRICAL | |
|---------------------------|--|
| MODEL | PRO-ISO-PHY-TETRA-2 |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 380 - 385 MHz RX: 390 - 395 MHz or TX: 410 - 415 MHz RX: 420 - 425 MHz |
| INSERTION LOSS TX-ANT. | < 6.2 dB (Typ. 4.8 to 6.0 dB) |
| INSERTION LOSS RX-ANT. | < 6.2 dB (Typ. 4.8 to 6.0 dB) |
| ISOLATION TRX → TRX | TX - TX: > 60 dB (380 - 385 MHz & 410 - 415 MHz) RX - RX: > 60 dB (390 - 395 MHz & 420 - 425 MHz) TX - RX / RX - TX: > 60 dB |
| SWR | < 1.5 |
| MAX. POWER | 25 W/station |
| GROUP DELAY VARIATION | TX-ANT. < 120 nsec. RX-ANT. < 150 nsec. |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Black |
| DIMENSIONS (L x W x H) | 190 (excl. conn.) x 240 x 65 mm / 7.48 (excl. conn.) x 9.45 x 2.56 in. |
| WEIGHT | Approx. 3500 g / 7.72 lb. |

ENVIRONMENTAL


IP-GRADE

IP-62


TYPICAL ATTENUATION VALUES

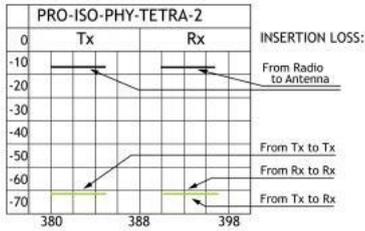

CONNECTION DIAGRAM

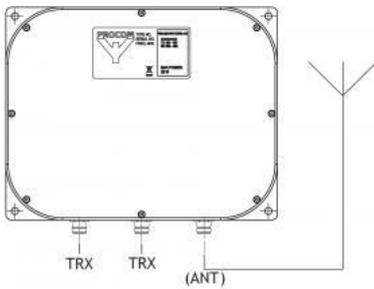

MOUNTING DETAILS

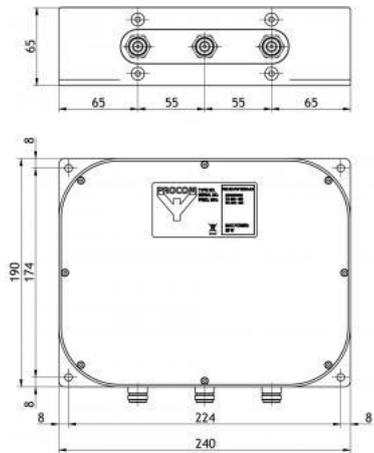



DCB 890-2300-7/16

- DC-block for 890 - 2300 MHz.
- DC tap connected to a 3-pole DIN connector.

Description

- Don't exceed 24 volts.
- The DIN connector has internal overvoltage protection.
- 2 models available: DC tab on male or female connector.


ORDERING DESIGNATIONS

| TYPE | | PRODUCT NO. |
|--|--|-------------|
| DCB 890-2300-7/16 | | 210001184 |
| DCB 890-2300-7/16-F(D)-M Male connector | | 210001188 |
| DCB 890-2300-7/16-F-M (D) Female connector | | 210001189 |

SPECIFICATIONS

| ELECTRICAL | |
|-------------------------------|--|
| MODEL | DCB 890-2300-7/16-F(D)-M or DCB 890-2300-7/16-F-M (D) |
| FREQUENCY | 890 - 2300 MHz |
| MAX. INPUT POWER | 250 W |
| INSERTION LOSS | < 0.1 dB |
| MAX. VOLTAGE AT DIN-CONNECTOR | 24 V |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.25 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | 7/16 DIN-female / 7/16 DIN-male |
| DIMENSIONS (L x W x H) | 80 x 43 x 55 mm |
| WEIGHT | Approx. 300 g |

TYPICAL RESPONSE CURVE

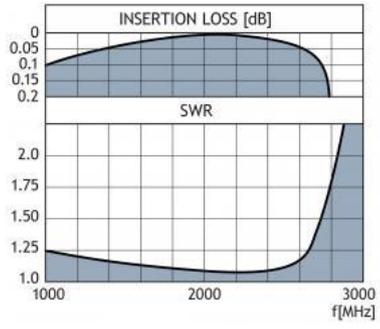



DCB 1G-3G-SMA

DC-block for 1-3 GHz

- DC-block for 1-3 GHz.

Description

- DC tap.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---------------|-------------|
| DCB 1G-3G-SMA | 210000496 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|----------------------------|
| MODEL | DCB 1G-3G-SMA |
| FREQUENCY | 1 - 3 GHz |
| MAX. INPUT POWER | 25 W |
| INSERTION LOSS | < 0.1 dB (1300 - 2700 MHz) |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.25 (1300 - 2700 MHz) |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | SMA-female / SMA-female |
| DIMENSIONS (L x W x H) | 45 x 35 x 15 mm |
| WEIGHT | Approx. 150 g |

TYPICAL RESPONSE CURVE

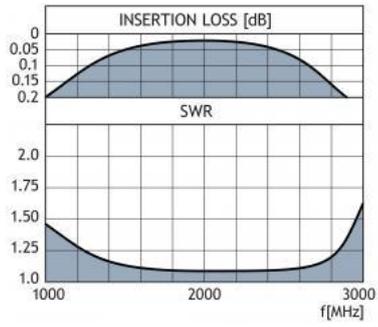



PRO-BCU 130

Balanced Combiner Solution

- PRO-BCU 130 for upgrading site with an extra channel.
- Add an ekstra channel directly on-site without any re-tuning of the installed system.

Description

- Balanced structure with two identical filters and two 3 dB hybrid couplers.
- Suitable for 19" rack mounting.
- Expandable in the field.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------|-------------|
| PRO-BCU 130 | |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-BCU 130 |
| TX FREQUENCY | 112 - 137 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 10 HU x 765 (483 x 443 x 765 mm) |
| WEIGHT | Approx. 14.8 kg |



PRO-BBPHY 4/2-20-.. dB-N

Broad Band Power Divider / Combiner

- Two antennas connected to the same transmitter or receiver.
- Broad band power splitter for radio systems.

Description

- Combining two transmitters on the same antenna.
Note: The power splitter has to be mounted on an extra heat sink when used as a combiner. Max. 15 W per TX.
- Combining two signal generators.
- 30 W load built-in.

ORDERING DESIGNATIONS


| TYPE | PRODUCT NO. |
|---------------------------|-------------|
| PRO-BBMPHY 4/2-20-3 dB-N | 210000291 |
| PRO-BBMPHY 4/2-20-6 dB-N | 210001240 |
| PRO-BBMPHY 4/2-20-10 dB-N | 210000289 |
| PRO-BBMPHY 4/2-20-20 dB-N | 210001241 |

SPECIFICATIONS


| ELECTRICAL | | | | |
|---|--|------|---|-------|
| MODEL | PRO-BBPHY 4/2-20-.. dB-N | | | |
| | 3 dB | 6 dB | 10 dB | 20 dB |
| TYPE | Cascaded Wilkinson-hybrid | | | |
| FREQUENCY | 70 - 175 MHz | | | |
| MAX. INPUT POWER | 30 W when used as a power splitter - 15 W per channel when used as a hybrid combiner. Note: Extra cooling necessary when used as a hybrid combiner | | | |
| INSERTION LOSS | < 3.8 dB typ. < 3.4 dB | ?? | < 10 dB \pm 1.5 dB typ. < 10 dB \pm 1 dB | ?? |
| ISOLATION TX ₁ , TX ₂ | > 16 dB 70 - 175 MHz, typ. > 20.5 dB | ?? | > 17 dB 70 - 175 MHz, typ. > 19 dB | ?? |
| PHASE TX ₁ , TX ₂ | 0° | | | |
| IMPEDANCE | Nom. 50 Ω | | | |
| LOAD | 30 W load built-in | | | |
| SWR | < 1.5 all other ports terminated with 50 Ω (typically < 1.4) | | | |

| | |
|---------------------------|--|
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | N-female (other types available) |
| DIMENSIONS (L x W x H) | 126 (incl. conn.) x 97.5 (incl. conn.) x 30.3 mm |
| WEIGHT | Approx. 400 g |

MOUNTING DETAIL

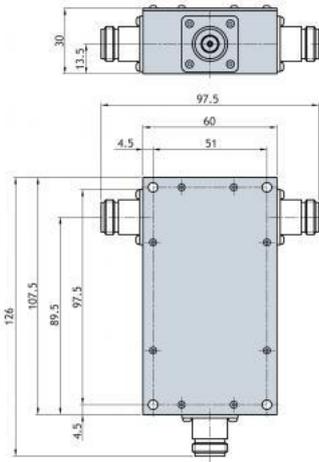

TYPICAL RESPONSE CURVE for 3 dB

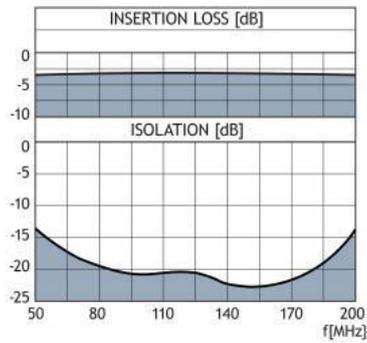



PRO-BBPHY 4/146-470-20-N

Broad Band Power Divider 1:4

- Four antennas connected to the same transmitter or receiver.
- Broad band power splitter for radio systems.

Description

- Combining four transmitters on the same antenna.
Note: The power splitter has to be mounted on an extra heat sink when used as a combiner. Max. 15 W per TX.
- Built-in 30 W load.

ORDERING DESIGNATION

| TYPE NO. | PRODUCT NO. |
|--------------------------|-------------|
| PRO-BBPHY 4/146-470-20-N | 210000470 |


SPECIFICATIONS

| ELECTRICAL | |
|---------------------------|--|
| MODEL | PRO-BBPHY 4/146-470-20-N |
| TYPE | Cascaded Wilkinson multisection hybrids |
| FREQUENCY | 146 - 470 MHz |
| MAX. INPUT POWER | 30 W when used as a power splitter - 15 W per channel when used as a hybrid combiner. Note: Extra cooling necessary when used as a hybrid combiner |
| INSERTION LOSS | < 8.5 dB |
| ISOLATION | > 11 dB, 146 - 220 MHz, > 18 dB, 220 - 470 MHz |
| IMPEDANCE | Nom. 50 Ω |
| LOAD | Built-in 30 W load |
| SWR | < 1.5 all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | N-female (other types available) |
| DIMENSIONS (L x W x H) | 260 x 178 (incl. conn.) x 37 mm |
| WEIGHT | Approx. 800 g |


MOUNTING

∅4 mm (four holes)

MOUNTING DETAILS

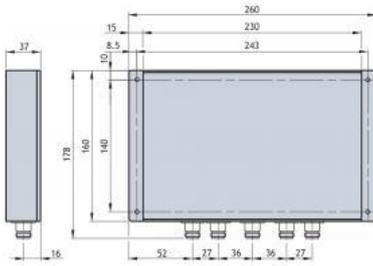

TYPICAL RESPONSE CURVE

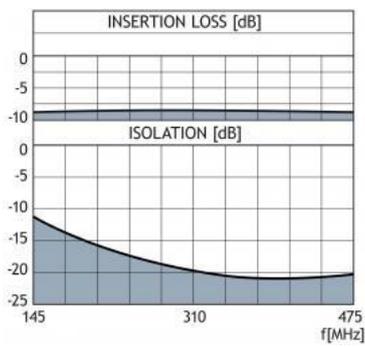



PRO-BBPHY 2/70-20-6 dB-N

Broad Band Unsymmetrical Power Divider 1:4

- Used where unsymmetrical splitting of the signal is required.
- Two antennas connected to the same transmitter or receiver where 25% of the signal either comes from or is transmitted to one of the antennas.

Description

- Broad band power splitter for radio systems. Max. 30 W.
- 30 W load built-in.


ORDERING DESIGNATION

| TYPE NO. | PRODUCT NO. |
|--------------------------|-------------|
| PRO-BBPHY 2/70-20-6 dB-N | 210000468 |


SPECIFICATIONS

| ELECTRICAL | |
|--------------------------------|---|
| MODEL | PRO-BBPHY 2/70-20-6 dB-N |
| TYPE | Cascaded Wilkinson-hybrid |
| FREQUENCY | 146 - 470 MHz |
| MAX. INPUT POWER | 30 W when used as a power splitter |
| INSERTION LOSS | Main port: Typically < 2.2 dB, max. 3.2 dB -6 dB port: 6 dB±0.5 dB (typically 6 dB±0.3 dB) |
| ISOLATION | > 14 dB, 146 - 470 MHz, typically > 20 dB |
| IMPEDANCE | Nom. 50 Ω |
| LOAD | 30 W load built-in |
| SWR High power & input port | < 1.5 (typically ≤ 1.3 dB) all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | N-female (other types available) |
| DIMENSIONS (L x W x H) | 126 (incl. conn.) x 97.5 (incl. conn.) x 30.3 mm |
| WEIGHT | Approx. 400 g |

MOUNTING DETAILS

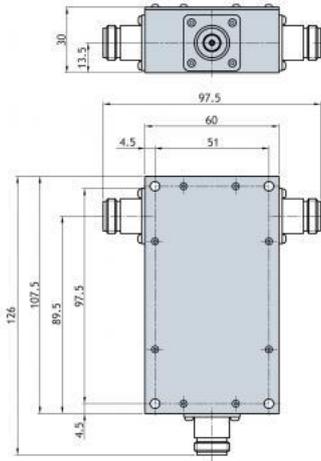

TYPICAL RESPONSE CURVE

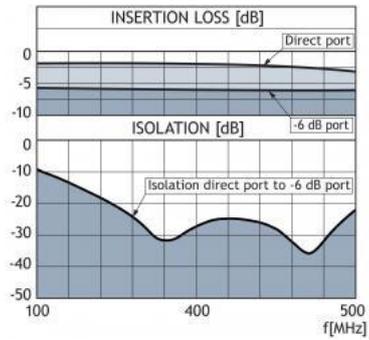



PRO-BBPHY 2/70-20-3 dB-N

Broad Band Power Divider 1:2

- Two antennas connected to the same transmitter or receiver.
- Broad band power splitter for radio systems.

Description

- Combining two transmitters on the same antenna.
Note: The power splitter has to be mounted on an extra heat sink when used as a combiner. Max. 15 W per TX.
- Combining two signal generators.
- 30 W load built-in.

ORDERING DESIGNATION


| TYPE NO. | PRODUCT NO. |
|--------------------------|-------------|
| PRO-BBPHY 2/70-20-3 dB-N | 210000282 |

SPECIFICATIONS


| ELECTRICAL | |
|--|--|
| MODEL | PRO-BBPHY 2/70-20-3 dB-N |
| TYPE | Cascaded Wilkinson-hybrid |
| FREQUENCY | 146 - 470 MHz |
| MAX. INPUT POWER | 30 W when used as a power splitter - 15 W per channel when used as a hybrid combiner. Note: Extra cooling necessary when used as a hybrid combiner |
| INSERTION LOSS | < 4.5 dB |
| ISOLATION TX ₁ , TX ₂ | > 11 dB, 146-470 MHz, typically > 17 dB |
| PHASE TX ₁ , TX ₂ | 0° |
| IMPEDANCE | Nom. 50 Ω |
| LOAD | 30 W load built-in |
| SWR | < 1.5 all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | N-female (other types available) |
| DIMENSIONS (L x W x H) | 126 (incl. conn.) x 97.5 (incl. conn.) x 30.3 mm |

| | |
|--------|---------------|
| WEIGHT | Approx. 400 g |
|--------|---------------|

TYPICAL RESPONSE CURVE

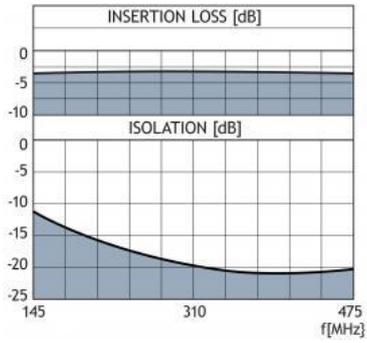

MOUNTING DETAILS

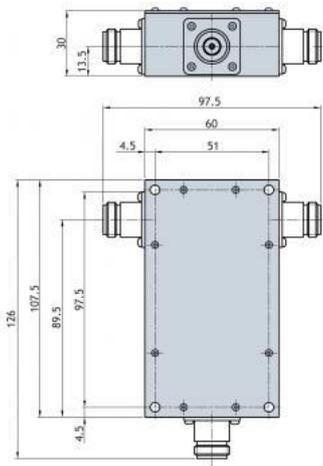



RPD 145-470/800-1000-10-N

Couplers

- Coupler with 8 - 14 dB coupling covering the 2 m, 70 cm, GSM and GPS bands.

DESCRIPTION

- Very broad-banded performance.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---------------------------|-------------|
| RPD 145-470/800-1000-10-N | 210001193 |


SPECIFICATIONS

| ELECTRICAL | |
|------------------------|--|
| MODEL | RPD 145-470/800-1000-10-N |
| FREQUENCY RANGE | 2 m and 70 cm: 145 - 470 MHz GSM: 800 - 1000 MHz GPS: 1575 MHz |
| COUPLING | 8 - 14 dB |
| MAX. INPUT POWER | 50 W |
| TOTAL LOSS | |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | ≤ 2.0 |
| COMPLIANCE | RoHS, IP65 |
| MECHANICAL | |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 165 x 75 x 23 mm |
| WEIGHT | Approx. 375 g |
| MOUNTING | M4 mm (4 holes) |
| ENVIRONMENTAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |

TYPICAL RESPONSE CURVE

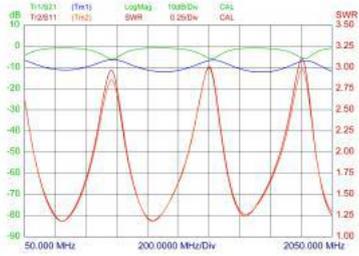

MOUNTING DETAILS

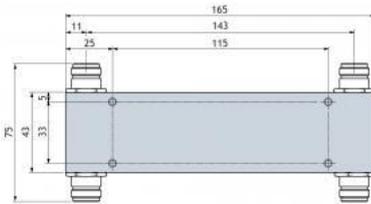



RH 1800/...

Hybrid Ring Combiner for 1800 MHz Cellular Base Station Transmitters

- The RH 1800/... is a hybrid ring combiner providing the possibility of operating two transmitters with very little or no frequency separation on the same antenna.
- The combiner forms part of the combining systems of cellular 1800 MHz base stations where multiple transmitters must be connected to a common antenna.

DESCRIPTION

- The RH 1800/... provides easy expandability as several devices can be mounted in a row as shown on the figure below.
- Materials used are aludine-treated aluminium, silvered brass and teflon. The combiners are supplied with a coating of black, 2-component polyurethane.
- The RH 1800/... is as standard provided with 7/16" connectors. Combiners with other connector types may be quoted on request.

ORDERING DESIGNATIONS

| TYPE NO. | PRODUCT NO. |
|-------------|-------------|
| RH 1800/... | 210001251 |

SPECIFICATIONS

| ELECTRICAL | |
|---|--|
| FILTER TYPE | Hybrid Ring Junction |
| FREQUENCY | 1800 MHz cellular bands |
| MAX. INPUT POWER | 200 W |
| INSERTION LOSS | Nom.: 3.01 dB Typ.: 3.05 dB |
| ISOLATION TX ₁ → TX ₂ | 35 dB at SWR _{ANT} ≤ 1.1 20 dB at SWR _{ANT} ≤ 1.5 |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.25 with all other ports terminated |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | 7/16" |
| LENGTH | ∅120 mm excl. connectors 162 mm incl. connectors |
| WIDTH | 29 mm |
| HEIGHT | 137 mm incl. connectors |
| WEIGHT | Approx. 2.2 kg |

MODE OF OPERATION



In the combiner the transmitting signals arrive 180° out of phase at each others ports. This results in an isolation of more than 30 dB from one transmitter to the other, which highly reduces the possibility of formation of intermodulation products.

Normally, isolators provided with second-harmonic filters are inserted in each branch between the transmitters and the combiner in order to increase the isolation between the transmitters further, and to prevent intermodulation caused by outside interfering signals entering the transmitter output stages from the antenna port.

The inherent insertion loss of the combiner from each TX-port to the antenna is 3 dB, which is inevitable when operating with very little or no channel spacing. Half of the power of each TX is fed to the fourth port where a suitably dimensioned 50 Ω load termination must be connected. This termination is not supplied and it should have a VSWR not exceeding 1:1.1.

The isolation between the TX-ports is highly dependent on the VSWR on the antenna port. At an antenna standing-waveratio of 1.5 the isolation will be reduced to 20 dB (please, see the low curve).

TYPICAL RESPONSE CURVE

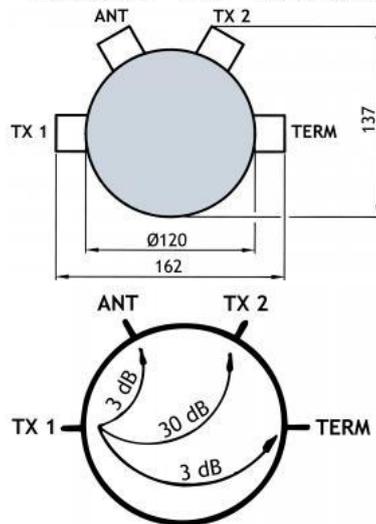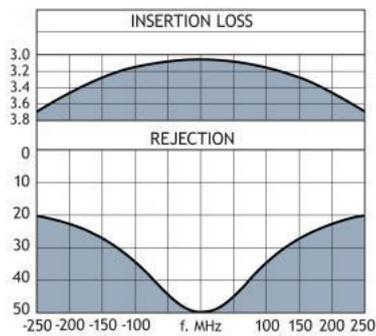



PRO-PHY85-4

4-Channel Hybrid Combiner for 85 MHz Transmitters

- Combining four transmitters or receivers on the same antenna.
- Better utilization of good antenna position.

DESCRIPTION

- Four antennas on the same transmitter or receiver.
- The only combining option with very small TX-TX frequency spacing.
- 60 W load supplied (other loads or no load as option).

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. | FREQUENCY |
|---------------|-------------|-------------|
| PRO-PHY85-4-1 | 210000783 | 68 - 73 MHz |
| PRO-PHY85-4-2 | 210000784 | 72 - 77 MHz |
| PRO-PHY85-4-3 | 210000627 | 76 - 81 MHz |
| PRO-PHY85-4-4 | 210000567 | 80 - 85 MHz |
| PRO-PHY85-4-5 | 210000568 | 84 - 88 MHz |

SPECIFICATIONS

| ELECTRICAL | |
|---|--|
| FILTER TYPE | Hybrid Junction |
| FREQUENCY | 68 - 88 MHz (see table) |
| MAX. INPUT POWER | 65 W per channel (max. 150 W with larger load) |
| INSERTION LOSS | < 6.2 dB ± 0.3 dB @ 4 MHz BW < 6.3 dB ± 0.3 dB @ 8 MHz BW |
| ISOLATION TX ₁ -TX ₂ (*see note) | > 31 dB @ 4 MHz BW > 29 dB @ 8 MHz BW |
| IMPEDANCE | Nom. 50 Ω |
| LOAD (**see note) | 30 W load fitted (other ratings available) |
| SWR | < 1.5 with all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female (other types available) |
| DIMENSIONS (L x W x H) | 420 x 89 (incl. conn.) x 42 mm (excl. loads) |
| WEIGHT | Approx. 1400 g (excl. load) |

*The isolation between the TX ports is directly dependent on the terminating SWR on the antenna port. With an antenna load SWR = 1.5, the isolation between the two TX ports will be reduced to 20 dB @ 5 MHz bandwidth.

**The SWR of the load's should be < 1.1! Each load should be able to dissipate 3/4 of the input power.

E.g.: With 50 W input, each load should be able to dissipate $50 \text{ W} \times 3/4 = 37 \text{ W}$.

CURVES





PRO-PHY-500-3400-4

Ultra Wideband 4-way combiner supporting GSM, DCS1800, PCS1900, UMTS, WiFi 2.4, 4G LTE (2600) and WIMAX

- Combiner for coupling of four transceivers on one common antenna.
- For parallel operation of four two-way communication radios (transceivers) where highest possible decoupling (isolation) is necessary.

DESCRIPTION

- Max. transmitter power 4 x 5 W.
- Also usable as equal power divider for max. 20 W.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|------------------------|-------------|
| PRO-PHY 500-3400-4-SMA | 210002139 |

SPECIFICATIONS

| ELECTRICAL | |
|--|---|
| MODEL | PRO-PHY 500-3400-4-SMA(f) |
| FREQUENCY | 500 - 3400 MHz |
| MAX. INPUT POWER | 1 x 20 W if used as divider 4 x 5 W if used as coupler |
| NOMINAL DIVIDER LOSS | 6.0 dB |
| TOTAL LOSS INCL. SPLITTER LOSS /COUPLER LOSS | ≤ 9.2 dB |
| ISOLATION | Port Tx/Rx to Tx/Rx> 18 dB (typ> 20 dB) |
| IMPEDANCE | Nom. 50 Ω |
| SWR | |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | SMA-connectors |
| DIMENSIONS (L x W x H) | 133 x 93.6 x 19.2 / 5.2 x 3.7 x 0.76 (including connectors) |
| WEIGHT | Approx. 400 g / 0.88 lb. |
| MOUNTING | ∅3 mm t(four holes) |

MOUNTING DETAILS

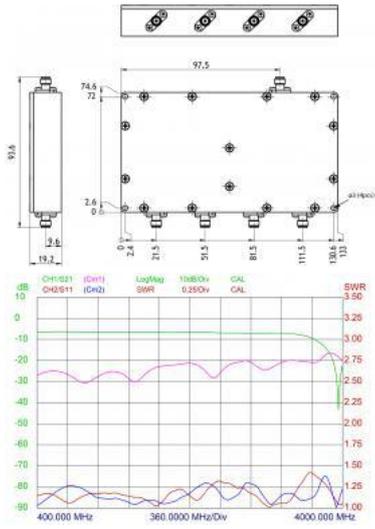



PRO-PHY 380-520-3 dB-N XS

Hybrid Coupler 100 W

- 100 W Hybrid Coupler with 3 dB coupling covering the 380 - 520 MHz band.

DESCRIPTION

- Excellent high power performance.
- Very low insertion loss over the entire frequency range.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---------------------------|-------------|
| PRO-PHY 380-520-3 dB-N XS | 210001845 |


SPECIFICATIONS

| ELECTRICAL | |
|----------------------------|---------------------------|
| MODEL | PRO-PHY 380-520-3 dB-N XS |
| FREQUENCY RANGE | 380 - 520 MHz |
| INSERTION LOSS | |
| Port 1 to 2 or port 1 to 3 | < 3.3 ± 0.5 dB |
| ISOLATION | |
| Port 1 to 4 or port 2 to 3 | > 20 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR ON ALL PORTS | ≤ 1.3 |
| COMPLIANCE | RoHS, IP64 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 59 x 40 x 28 mm |
| WEIGHT | Approx. 180 g |

MOUNTING DETAILS

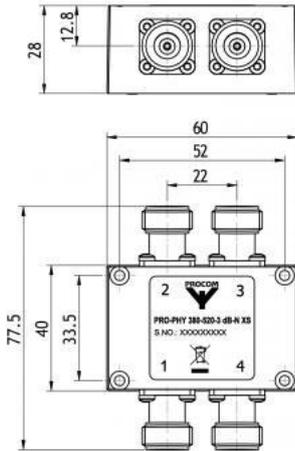

TYPICAL GAIN AND SWR CURVES

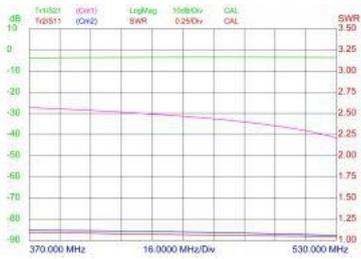



PHY-TETRA-4-FME-...

TETRA combiner with SWR adaption/adjustment network

- Combiner for coupling of four TETRA mobile transceivers on one common antenna.
- Factory-adjusted to either 380 - 410 MHz or 400 - 430 MHz.
- Compact dimensions - especially suitable for mobile applications.
- FME-connectors for direct connection of FME-cable without extra adapter.

DESCRIPTION

- For parallel operation of four two-way communication radios (transceivers) where highest possible decoupling (isolation) is necessary.
- Integrated SWR adjustment network for optimization of isolation in the frequency range of 380 - 410 MHz or 400 - 430 MHz. Via the adjustment network the effective SWR of the antenna can be optimized and consequently the isolation between the ports of the combiner clearly improved.
- High isolation obtainable: Up to 60 dB (Dependent on the SWR of the connected antenna).
- The adjustment of the SWR adjustment network takes place via built-in variable capacitors.
- Max. TETRA transmitter power 4 x 5 W.
- Also usable as equal power divider for max. 20 W.
- Very small ripple over the total frequency range.

ORDERING DESIGNATIONS


| TYPE | PRODUCT NO. |
|-------------------------|-------------|
| PHY-TETRA-4-FME-380-410 | 210002057 |
| PHY-TETRA-4-FME-400-430 | 210002058 |

SPECIFICATIONS


| ELECTRICAL | |
|--|--|
| MODEL | PHY-TETRA-4-FME-... |
| FREQUENCY | 380 - 410 MHz or 400 - 430 MHz |
| MAX. INPUT POWER (TETRA) | 1 x 20 W if used as divider 4 x 5 W if used as coupler - |
| NOMINAL DIVIDER LOSS | 6.0 dB |
| TOTAL LOSS INCL. SPLITTER LOSS /COUPLER LOSS | ≤ 7.0 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | FME-connectors |
| DIMENSIONS (L x W x H) | 56.7 x 100 (including bottom plate and connectors) x 22 mm / 2.23 x 3.94 (including bottom plate and connectors) x 0.87 in. |

| | |
|----------|--------------------------|
| WEIGHT | Approx. 140 g / 0.31 lb. |
| MOUNTING | ø4 mm (two holes) |


MOUNTING DETAILS

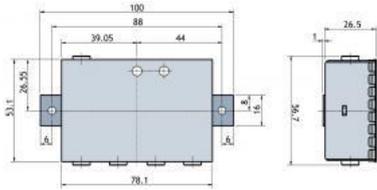


TYPICAL RESPONSE CURVE SWR 1

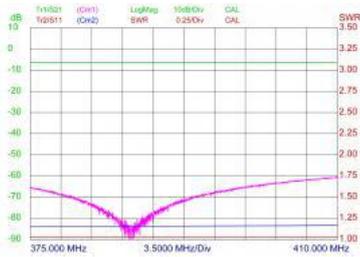

TYPICAL RESPONSE CURVE ANTENNA MU 1-Z/s (with 1.5 m cable)

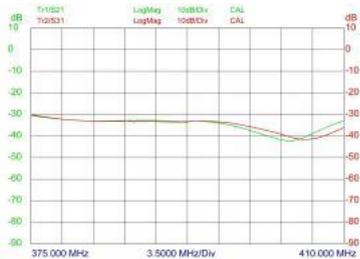

TYPICAL RESPONSE CURVE ANTENNA MU 3-BZ/TETRA/I (with 1.5 m cable)

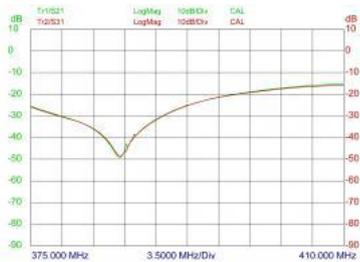



PHY-TETRA-2-FME-...

TETRA combiner with SWR adaption/adjustment network

- Combiner for coupling of two TETRA mobile transceivers on one common antenna.
- Factory-adjusted to either 380 - 410 MHz or 400 - 430 MHz.
- Compact dimensions - especially suitable for mobile applications.
- FME-connectors for direct connection of FME-cable without extra adapter.

DESCRIPTION

- For parallel operation of two two-way communication radios (transceivers) where highest possible decoupling (isolation) is necessary.
- Integrated SWR adjustment network for optimization of isolation in the frequency range of 380 - 410 MHz or 400 - 430 MHz. Via the adjustment network the effective SWR of the antenna can be optimized and consequently the isolation between the ports of the combiner clearly improved.
- High isolation obtainable: Up to 60 dB (Dependent on the SWR of the connected antenna).
- The adjustment of the SWR adjustment network takes place via built-in variable capacitors.
- Max. TETRA transmitter power 2 x 10 W.
- Also usable as equal power divider for max. 20 W.
- Very small ripple over the total frequency range.

ORDERING DESIGNATIONS


| TYPE | PRODUCT NO. |
|-------------------------|-------------|
| PHY-TETRA-2-FME-380-410 | 210001836 |
| PHY-TETRA-2-FME-400-430 | 210001837 |

SPECIFICATIONS


| ELECTRICAL | |
|--|---|
| MODEL | PHY-TETRA-2-FME-... |
| FREQUENCY | 380 - 410 MHz or 400 - 430 MHz |
| MAX. INPUT POWER (TETRA) | 1 x 20 W if used as divider 2 x 10 W if used as coupler - if more than 2 x 5 W, mounting on metal plate is recommended! |
| NOMINAL DIVIDER LOSS | 3.0 dB |
| TOTAL LOSS INCL. SPLITTER LOSS /COUPLER LOSS | ≤ 3.5 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | < 1.25 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | FME-connectors |
| DIMENSIONS (L x W x H) | 50.5 x 66 (including bottom plate |

| | |
|----------|--|
| | and connectors) x 19.5 mm / 1.99 x 2.59 (including bottom plate and connectors) x 0.77 in. |
| WEIGHT | Approx. 360 g / 0.79 lb. |
| MOUNTING | ø4 mm (two holes) |


MOUNTING DETAILS

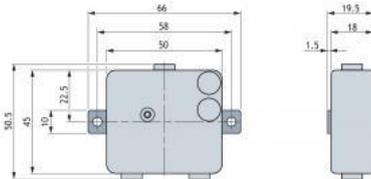


TYPICAL RESPONSE CURVE SWR 1

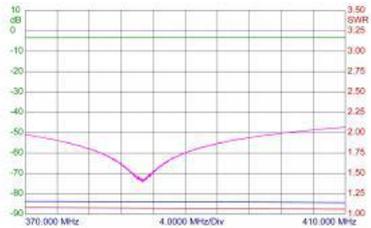

TYPICAL RESPONSE CURVE ANTENNA MU 1-Z/s (with 1.5 m cable)

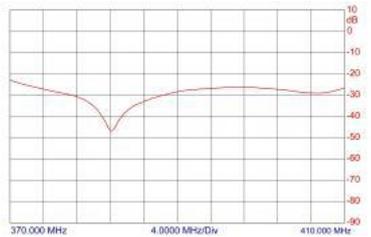

TYPICAL RESPONSE CURVE ANTENNA MU 3-BZ/TETRA/I (with 1.5 m cable)

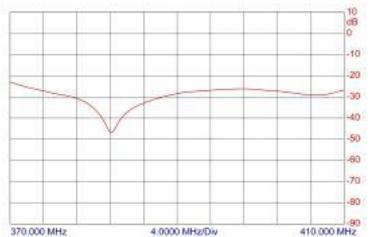



PRO-AREL1-12V

Alarm box used for detecting high SWR in antenna systems.

- PRO-AREL1-12V is an alarm box used for detecting high SWR in antenna systems. The PRO-AREL1-12V is connected to a power monitor, e.g. PRO-PM2-2/70 25W, and this will enable you to adjust the power monitor so that the PRO-AREL1-12V gives an alarm signal at e.g. SWR 2:1 at a certain frequency/power.

DESCRIPTION

- The alarm drives a latched relay and a light-emitting diode and that mode is active until the reset button is pressed.
- It is possible to connect an external alarm such as light, loudspeaker etc. (max. 1 A, NC or NO on a contact rail).


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---------------|-------------|
| PRO-AREL1-12V | 210001186 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|---|
| MODEL | PRO-AREL1-12V |
| TYPE | Alarm box |
| POWER | 11 - 14 V |
| CURRENT | 10 mA |
| CURRENT WITH ALARM | 30 mA |
| RELAY CONTACT | NC/NO AC-DC 1A |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | Screw terminal and Phono connector |
| DIMENSIONS (L x W x H) | 50 x 41 x 20 mm/ 1.97 x 1.61 x 0.79 in. |
| WEIGHT | Approx. 110 g/ 0.24 lb. |

FUNCTIONAL DIAGRAM

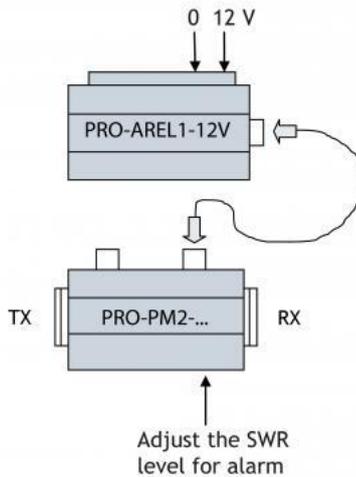

1. Connect PRO-AREL1-12V to PRO-PM2-... to REV ANT and connect 12 V to PRO-AREL1-12V.
2. Adjust the trimming potentiometer on PRO-PM2-... to minimum (anti-clockwise).
3. Connect a load to the PRO-PM2-... corresponding to the SWR required, e.g. 25 Ω SWR 2:1.
4. Connect the signal of the required frequency and power to PRO-PM2-....
5. If the alarm is lighting, press RESET. If the alarm does not stop, adjust the trimming potentiometer on the PRO-PM2-2/70 to minimum and press RESET.
6. Slowly adjust the trimming potentiometer on the PRO-PM2-... clockwise until the alarm starts.



PRO-BBPHY 2/70-20-10 dB-N

Broad Band Unsymmetrical Power Divider 1:10

- Used where unsymmetrical splitting of the signal is required.
- Two antennas connected to the same transmitter or receiver where 10% of the signal either comes from or is transmitted to one of the antennas.

DESCRIPTION

- Broad band power splitter for radio systems. Max. 30 W.
- 30 W load built-in.


ORDERING DESIGNATION

| TYPE NO. | PRODUCT NO. |
|---------------------------|-------------|
| PRO-BBPHY 2/70-20-10 dB-N | 210000281 |


SPECIFICATION

| ELECTRICAL | |
|-------------------------------------|---|
| MODEL | PRO-BBPHY 2/70-20-10 dB-N |
| TYPE | Cascaded Wilkinson-hybrid |
| FREQUENCY | 146 - 470 MHz |
| MAX. INPUT POWER | 30 W when used as a power splitter |
| INSERTION LOSS | High power port: < 3.2 dB typically 2.4 dB Low power port: -10 dB±1 dB (typically -10 dB±0.6 dB) |
| ISOLATION Low to high power port | > 14 dB (typically > 17 dB) |
| IMPEDANCE | Nom. 50 Ω |
| LOAD | 30 W load built-in |
| SWR High power & input port | < 1.5 (typically ≤ 1.3 dB) all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | N-female (other types available) |
| DIMENSIONS (L x W x H) | 126 (incl. conn.) x 97.5 (incl. conn.) x 30.3 mm |
| WEIGHT | Approx. 400 g |

TYPICAL RESPONSE CURVE

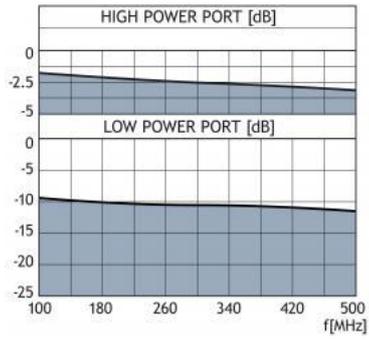

MOUNTING DETAILS

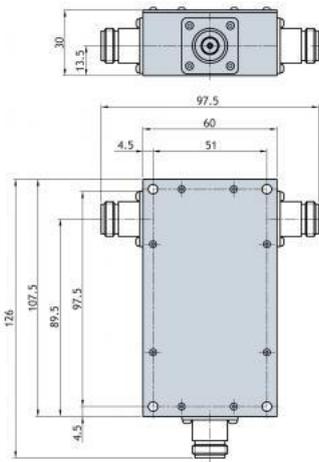



PRO-BBMPHY-74-175-3 dB-100W

Broad Band Power Divider / Combiner

- Two antennas connected to the same transmitter or receiver.
- Broad band power splitter for radio systems.

DESCRIPTION

- Combining of two transmitters on the same antenna.
- Note: The power splitter has a built-in heat sink.
Max. 40 W per TX.
- 100 W load built-in.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-----------------------------|-------------|
| PRO-BBMPHY-74-175-3 dB-100W | 210000286 |

SPECIFICATIONS

| ELECTRICAL | |
|---|--|
| MODEL | PRO-BBMPHY-74-175-3 dB-100W |
| TYPE | Cascaded Wilkinson-hybrid |
| FREQUENCY | 74 - 175 MHz |
| MAX. INPUT POWER | 100 W when used as a power splitter - 40 W per channel when used as a hybrid combiner. Note: Gets hot when used as a hybrid combiner. (Up to approx. 80° C) |
| INSERTION LOSS | < 3.6 dB |
| ISOLATION TX ₁ , TX ₂ | > 20 dB |
| PHASE TX ₁ , TX ₂ | 0° |
| IMPEDANCE | Nom. 50 Ω |
| LOAD | 100 W load built-in |
| SWR | < 1.5 with all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | N-female (other types available) |
| DIMENSIONS (L x W x H) | 196 (incl. conn.) x 128 x 70 mm |
| WEIGHT | Approx. 1.3 kg |

TYPICAL RESPONSE CURVE

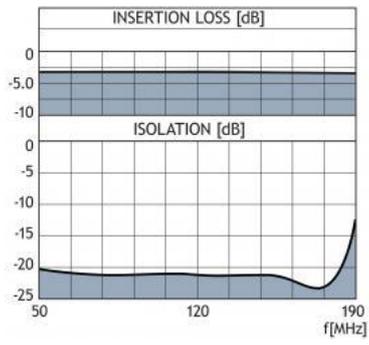



PRO-BBMPHY-450-2-N

Broad Band Power Divider / Combiner

- Two antennas connected to the same transmitter or receiver.
- Broad band power splitter for radio systems.


DESCRIPTION

- Combining two transmitters on the same antenna.
Note: The power splitter has to be mounted on an extra heat sink when used as a combiner. Max. 15 W per TX.
- Combining two signal generators.
- 30 W load built-in.

SPECIFICATIONS

| ELECTRICAL | |
|--|--|
| MODEL | PRO-BBMPHY-450-2-N |
| TYPE | Cascaded Wilkinson-hybrid |
| FREQUENCY | 430 - 470 MHz (other frequencies on request) |
| MAX. INPUT POWER | 30 W when used as a power splitter - 15 W per channel when used as a hybrid combiner. Note: Extra cooling necessary when used as a hybrid combiner |
| BANDWIDTH | 30 MHz min. Can be extended. |
| INSERTION LOSS | < 3.6 dB, typically < 3.4 dB |
| ISOLATION TX ₁ , TX ₂ | > 20 dB, typically > 23 dB |
| PHASE TX ₁ , TX ₂ | 0° |
| IMPEDANCE | Nom. 50 Ω |
| LOAD | 30 W load built-in |
| SWR | < 1.5 (typically < 1.35) |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | N-female (other types available) |
| DIMENSIONS (L x W x H) | 130 (incl. conn.) x 152 x 35 mm |
| WEIGHT | Approx. 400 g |

TYPICAL RESPONSE CURVE

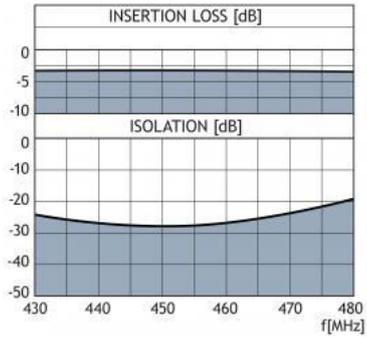



PRO-BBMPHY-200-2-N

Broad Band Power Divider / Combiner

- Two antennas connected to the same transmitter or receiver.
- Broad band power divider for radio systems.

DESCRIPTION

- Combining two transmitters on the same antenna.
Note: The power divider has to be mounted on an extra heat sink when used as a combiner. Max. 10 W per TX.
- Combining two signal generators.
- 20 W load built-in.


ORDERING DESIGNATION

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-BBMPHY-200-2-N | 210001111 |

SPECIFICATIONS

| ELECTRICAL | |
|---|--|
| MODEL | PRO-BBMPHY-200-2-N |
| TYPE | Cascaded Wilkinson-hybrid |
| FREQUENCY | 175 - 225 MHz |
| MAX. INPUT POWER | 20 W when used as a power divider. 10 W per channel when used as a hybrid combiner. Note: Extra cooling necessary when used as a hybrid combiner |
| INSERTION LOSS | < 0.6 dB, typically < 0.5 dB |
| ISOLATION TX ₁ , TX ₂ | > 24 dB, typically > 26 dB |
| PHASE TX ₁ , TX ₂ | 0° |
| IMPEDANCE | Nom. 50 Ω |
| LOAD | 30 W load built-in |
| SWR | < 1.6 all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | N-female (other types available) |
| DIMENSIONS (L x W x H) | 130 (incl. conn.) x 152 x 35 mm |

TYPICAL RESPONSE CURVE

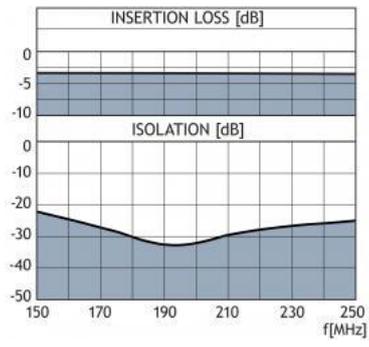



PRO-BBMPHY-150-2-N

Broad Band Power Divider / Combiner

- Two antennas connected to the same transmitter or receiver.
- Broad band power divider for radio systems.

DESCRIPTION

- Combining two transmitters on the same antenna.
- Note: The power divider has to be mounted on an extra heat sink when used as a combiner. Max. 15 W per TX.
- Combining two signal generators.
- 30 W load built-in.

ORDER DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|-------------|
| PRO-BBMPHY-150-2-N | 210000287 |

SPECIFICATIONS

| ELECTRICAL | |
|---|--|
| MODEL | PRO-BBMPHY-150-2-N |
| TYPE | Cascaded Wilkinson-hybrid |
| FREQUENCY | 144 - 175 MHz |
| MAX. INPUT POWER | 30 W when used as a power divider. 15 W per channel when used as a hybrid combiner. Note: Extra cooling necessary when used as a hybrid combiner |
| INSERTION LOSS | < 3.6 dB, typically < 3.4 dB |
| ISOLATION TX ₁ , TX ₂ | > 24 dB, typically > 26 dB |
| PHASE TX ₁ , TX ₂ | 0° |
| IMPEDANCE | Nom. 50 Ω |
| LOAD | 30 W load built-in |
| SWR | < 1.6 all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | N-female (other types available) |
| DIMENSIONS (L x W x H) | 130 (incl. conn.) x 152 x 35 mm |
| WEIGHT | Approx. 400 g |

TYPICAL RESPONSE CURVE





PRO-2REL-1PM-12V-...-TNC

Relay

- The PRO-2RE-1PM-12V-...-TNC is used in simplex systems to avoid a simultaneous transmission on two channels.


DESCRIPTION

- When transmitting on one channel, the other channels change to LOAD to make sure that the system is secured against a simultaneous transmission on two channels.
- PRO-2RE-1PM-12V-...-TNC units are interconnected via a data cable for mutual control.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. | FREQUENCY RANGE |
|------------------------|-------------|-----------------|
| PRO-2REL-1PM-12V-L-TNC | 210001814 | 68 - 175 MHz |
| PRO-2REL-1PM-12V-H-TNC | 210001448 | 300 - 470 MHz |

| ELECTRICAL | |
|------------------------|---|
| MODEL | PRO-2REL-1PM-12V-...-TNC |
| TYPE | Relay |
| FREQUENCY RANGE | 68 - 175 MHz or 300 - 470 MHz |
| SUPPLY VOLTAGE DC | 11.5 V to 15 V |
| CURRENT | 200 mA |
| POWER OPERATIONS RANGE | Min. 2 W Max. 40 W |
| INSERTION LOSS | < 0.5 dB |
| ISOLATION | >50 dB |
| SWR | < 1.5 |
| SHIFT TIME | < 5 ms |
| OPERATIONS | 10 ⁷ |
| MECHANICAL | |
| CONNECTORS | TNC |
| DIMENSIONS (L x W x H) | 90 x 77 x 28 mm/ 3.54 x 3.03 x 1.10 in. (incl. connectors) |
| WEIGHT | Approx. 150 g/ 0.33 lb. |

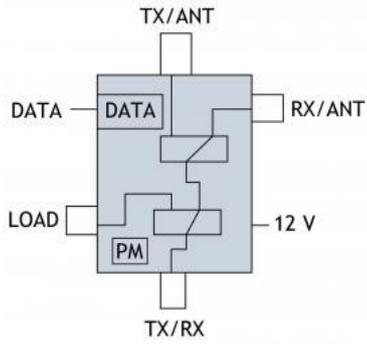



PRO-RPS-4-N

4-Channel RX Power Splitter

- Low power, compact 4-channel power splitter/combiner.
- The splitter covers the frequency range from 50-1000 MHz.

DESCRIPTION

- Almost no ripple in loss and isolation over the entire frequency range.


ORDERING DESIGNATIONS

| TYPE NO. | PRODUCT NO. |
|-------------|-------------|
| PRO-RPS-4-N | 210000593 |

SPECIFICATIONS

| ELECTRICAL | |
|-----------------------------|-----------------|
| FREQUENCY RANGE | 50-1000 MHz |
| MAX INPUT POWER | 2 W |
| INSERTION LOSS (above 6 dB) | < 1.5 dB |
| ISOLATION OUTPUT TO OUTPUT | > 20 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | < 1.3 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 89 x 39 x 29 mm |
| WEIGHT | Approx. 200 g |

INSERTION LOSS & ISOLATION

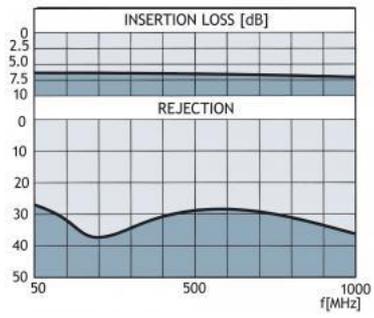



PRO-RPS-4-GPS-N

4-channel RX Power Splitter

- Passive receiver power splitter.
- Large frequency range. 1500 MHz to 1650 MHz.
- High isolation between outputs. > 20 dB.

DESCRIPTION

- To be used where RF-signals, special GPS-signals shall be divided or combined:
 - more receivers connected to the same coaxial cable
 - more GPS-antennas on the same coaxial cable
 - spectrum analyzer and GPS-receiver on the same coaxial cable.
- N-female on all ports. (Other connector types on request).
- DC-pass on all ports. (Other possibilities on request).


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-----------------|-------------|
| PRO-RPS-4-GPS-N | 210000664 |

SPECIFICATIONS

| ELECTRICAL | |
|----------------------------|---|
| FREQUENCY RANGE | 1500-1650 MHz |
| INSERTION LOSS [S12] | 6.5 dB ± 0.5 dB |
| ISOLATION OUTPUT TO OUTPUT | Min. 20 dB typ. ≥ 25 dB |
| INPUT SWR | Max. 1.5 typ. < 1.3 |
| OUTPUT SWR | Max. 1.5 typ. < 1.3 |
| POWER HANDLING | Max. 0.5 W each port |
| DC-PASS | Yes - all ports |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 138 (incl. conn.) x 152 (incl. flanges) x 35 mm |
| WEIGHT | 280 g |

INSERTION LOSS & ISOLATION

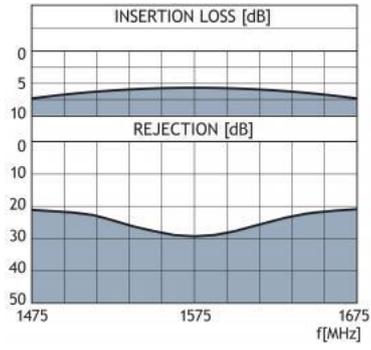



PRO-RPS-2-N

2-Channel RX Power Splitter

- Low power, compact 2-channel power splitter/combiner.
- The splitter covers the frequency range from 50 - 1000 MHz.

DESCRIPTION

- Almost no ripple in loss and isolation over the entire frequency range.


ORDERING DESIGNATIONS


| TYPE NO. | PRODUCT NO. |
|-------------|-------------|
| PRO-RPS-2-N | 210000599 |

SPECIFICATIONS

| ELECTRICAL | |
|-----------------------------|------------------|
| FREQUENCY RANGE | 50-1000 MHz |
| MAX INPUT POWER | 2 W |
| INSERTION LOSS (above 3 dB) | < 1.2 dB |
| ISOLATION OUTPUT TO OUTPUT | > 20 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | < 1.3 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 89 x 39 x 29 mm |
| WEIGHT | Approx. 150 g |

INSERTION LOSS & ISOLATION

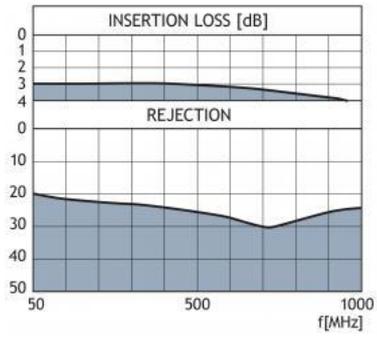

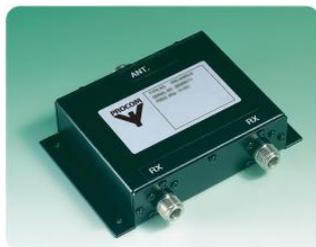

PRO-RPS-2-GPS-N

2-Channel RX Power Splitter

- Passive receiver power splitter.
- Large frequency range: 1500 MHz to 1650 MHz.
- High isolation between outputs: > 20 dB.

DESCRIPTION

- To be used where RF-signals, especially GPS-signals, are to be divided or combined:
 - 1.more receivers connected to the same coaxial cable
 - 2.more GPS-antennas on the same coaxial cable
 - 3.spectrum analyzer and GPS-receiver on the same coaxial cable.
- N-female on all ports. (Other connector types on request).
- Several DC-pass options available (see ordering designations).

ORDERING DESIGNATIONS


| TYPE | DC PASS | PRODUCT NO. |
|---------------------|--|-------------|
| PRO-RPS-2-GPS-N | DC pass between all ports | 210000765 |
| PRO-RPS-2-GPS-N-0DC | No DC pass | 210002074 |
| PRO-RPS-2-GPS-N-1DC | DC pass between RX port 1 and ANT port | 210001852 |
| PRO-RPS-2-GPS-N-2DC | DC pass from RX port 1 to ANT port and from RX port 2 to ANT port, but NOT from RX port 1 to RX port 2 | 210002143 |

SPECIFICATIONS


| ELECTRICAL | |
|----------------------------|---|
| MODEL | PRO-RPS-2-GPS-N |
| FREQUENCY RANGE | 1500 - 1650 MHz |
| INSERTION LOSS [S12] | 3.5 dB ± 0.5 dB |
| ISOLATION OUTPUT TO OUTPUT | Min. 20 dB typ. ≥ 25 dB |
| INPUT SWR | Max. 1.5 typ. < 1.3 |
| OUTPUT SWR | Max. 1.5 typ. < 1.3 |
| POWER HANDLING | Max. 0.5 W each port |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 138 (incl. conn.) x 152 (incl. flanges) x 35 mm |
| WEIGHT | 280 g |

| | |
|----------|-----------------|
| MOUNTING | ∅4 mm (4 holes) |
|----------|-----------------|

MOUNTING DETAILS

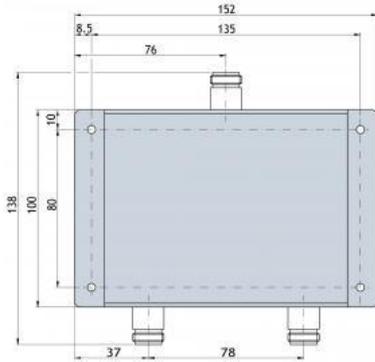

TYPICAL RESPONSE CURVE

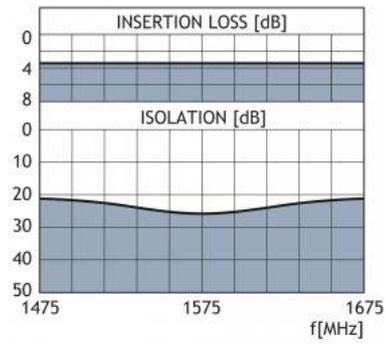



PRO-PS4-DC-2.5G-N

4-Channel equal Power Splitter

- Compact 4-channel resistive power splitter/combiner.
- Covers the frequency range from 0 - 2500 MHz.

DESCRIPTION

- Almost no ripple in loss over the entire frequency range.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------|-------------|
| PRO-PS4-DC-2.5G-N | 210001173 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|-----------------------------|
| MODEL | PRO-PS4-DC-2.5G-N |
| FREQUENCY RANGE | 0 - 2500 MHz |
| MAX INPUT POWER | 10 W |
| INSERTION LOSS AND ISOLATION | Typ. 12.5 dB \pm 1 dB |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | < 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 89 x 39 x 29 mm |
| WEIGHT | Approx. 200 g |

TYPICAL RESPONSE CURVE

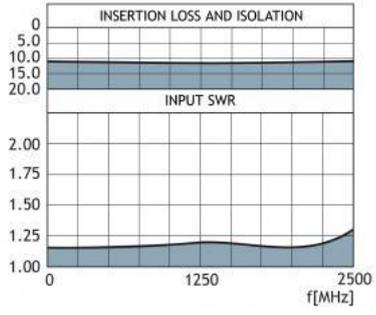



PRO-PS2-DC-2.5G-N

2-Channel equal Power Splitter

- Compact 2-channel resistive power splitter/combiner.
- Covers the frequency range from 0 - 2500 MHz.

DESCRIPTION

- Almost no ripple in loss over the entire frequency range.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------|-------------|
| PRO-PS2-DC-2.5G-N | 210001172 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|-----------------------------|
| MODEL | PRO-PS2-DC-2.5G-N |
| FREQUENCY RANGE | 0 - 2500 MHz |
| MAX INPUT POWER | 10 W |
| INSERTION LOSS AND ISOLATION | Typ. 7 dB \pm 1 dB |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | < 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 89 x 39 x 29 mm |
| WEIGHT | Approx. 150 g |

TYPICAL REponce CURVE

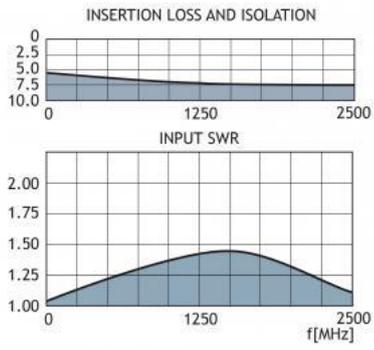



PRO-PRL 15W-7/16

Coaxial wideband load

- 15 W load capacity at maximum operating temperature.
- Low SWR up to 3 GHz.

DESCRIPTION

- Wide temperature range.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|------------------|-------------|
| PRO-PRL 15W-7/16 | 200002308 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------|------------------|
| MODEL | PRO-PRL 15W-7/16 |
| FREQUENCY RANGE | 0 - 2 GHz |
| MAX. INPUT POWER | 25 W @ 25°C |
| IMPEDANCE | Nom. 50 Ω |
| SWR | < 1.3 |
| MECHANICAL | |
| TEMP. RANGE | -30°C → +60°C |
| CONNECTORS | 7/16 DIN-male |
| DIMENSIONS | ø34.5 X 62.25 mm |
| WEIGHT | Approx. 150 g |
| COMPLIANCE | RoHs, IP65 |



PRO-PHY 380-520-3 dB...


100 W 3 dB Coupler (90° Hybrid)

- Hybrid Coupler with 3 dB coupling covering the 380 - 520 MHz band.
- Excellent high-power performance - 100 W.
- Very low insertion loss over the entire frequency range.

DESCRIPTION


3 dB 90° Hybrid Couplers also known as quadrature hybrids are a passive four port device that can be used in many different modes depending on the application. It can be used as a splitter, combiner or injection of a signal into a signal path.

BLOCK DIAGRAM

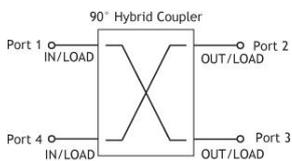


DIFFERENT MODES OF THE 3 dB HYBRID COUPLER


Coupler splitter mode: divides the signal into two equal components with a 90° phase difference that can be used to split signals from tower top amplifiers to the base station receivers.

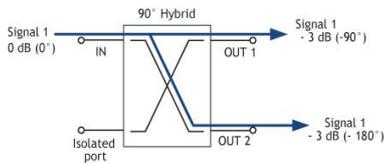

Coupler combiner mode 1: If the same signals is applied at the input ports with a 90° phase difference the signals adds up on one port.

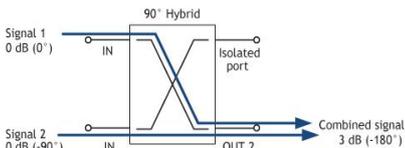

Coupler combiner mode 2: Combining two non-coherent signals that are available at both ports.

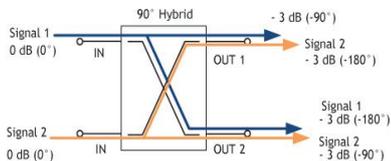

COMMON APPLICATIONS OF 3 dB 90° HYBRID COUPLERS

- Combining two transmitters with very narrow spacing to one common antenna or to a DAS network.
- Combining two carrier inputs to one or two antennas or leaky feeder/radiating cables.
- Splitting signals from tower mounted amplifiers to base station receivers.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---------------------------|-------------|
| PRO-PHY 380-520-3 dB-7/16 | 200002312 |
| PRO-PHY 380-520-3 dB-N | 200002373 |


SPECIFICATIONS

| ELECTRICAL | |
|----------------------------|--|
| MODEL | PRO-PHY 380-520-3 dB-... |
| FREQUENCY RANGE | 380 - 520 MHz |
| INSERTION LOSS | |
| Port 1 to 2 or port 1 to 3 | < 3.3 ± 0.5 dB |
| ISOLATION | |
| Port 1 to 4 or port 2 to 3 | > 20 dB |
| IMPEDANCE | Nom. 50 Ω |
| MAX. INPUT POWER | 100 W |
| SWR ON ALL PORTS | ≤1.5 |
| COMPLIANCE | RoHS, IP67 |
| IP RATING | IP67 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | DIN 7/16-female or N-female |
| DIMENSIONS (L x W x H) | 129 x 100 x 46 mm / 5.08 x 3.94 x 1.81 in. (incl. connectors and flanges) |
| WEIGHT | Approx. 865 g / 1.91 lb. |
| MOUNTING | ∅5.2 mm / ∅0.20 in. (4 holes) |

TYPICAL COUPLING, ISOLATION AND SWR CURVES

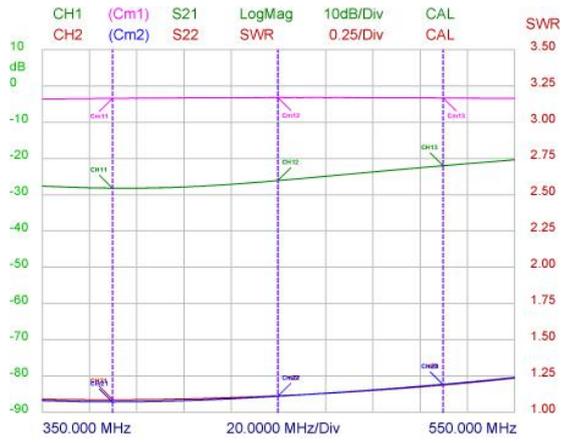

MOUNTING DETAILS

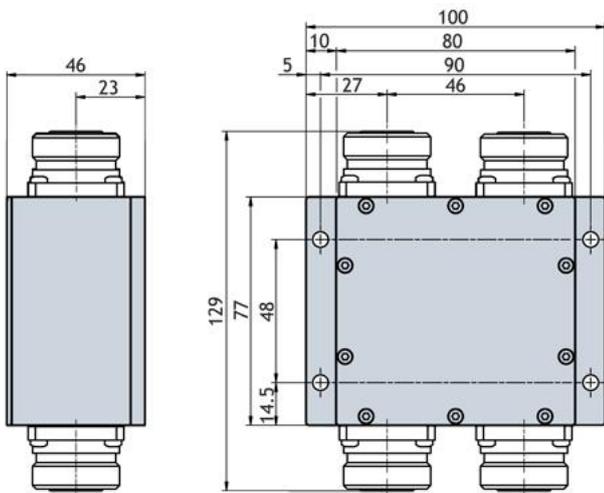



PRO-PHY 380-2700-3 dB-...


200 W 3 dB Coupler (90° Hybrid)

- Hybrid Coupler with 3 dB coupling covering the 380 - 2700 MHz band.
- Excellent high-power performance - 200 W.
- Low insertion loss over the entire frequency range.

DESCRIPTION


3 dB 90° Hybrid Couplers also known as quadrature hybrids are a passive four port device that can be used in many different modes depending on the application. It can be used as a splitter, combiner or injection of a signal into a signal path.

BLOCK DIAGRAM

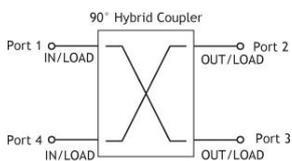


DIFFERENT MODES OF THE 3 dB HYBRID COUPLER


Coupler splitter mode: divides the signal into two equal components with a 90° phase difference that can be used to split signals from tower top amplifiers to the base station receivers.

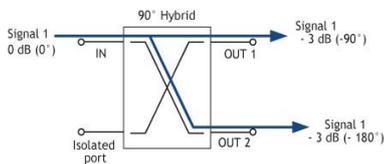

Coupler combiner mode 1: If the same signals is applied at the input ports with a 90° phase difference the signals adds up on one port.

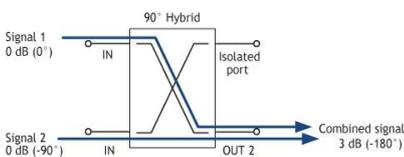

Coupler combiner mode 2: Combining two non-coherent signals that are available at both ports.

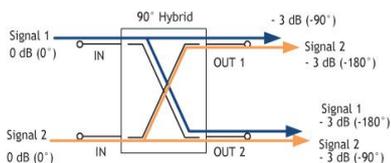

COMMON APPLICATIONS OF 3 dB 90° HYBRID COUPLERS

- Combining two transmitters with very narrow spacing to one common antenna or to a DAS network.
- Combining two carrier inputs to one or two antennas or leaky feeder/radiating cables.
- Splitting signals from tower mounted amplifiers to base station receivers.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------------------|-------------|
| PRO-PHY 380-2700-3 dB-N(f) | 200002403 |
| PRO-PHY 380-2700-3 dB-7/16(f) | 200002408 |


SPECIFICATIONS

| ELECTRICAL | |
|----------------------------|--|
| MODEL | PRO-PHY 380-2700-3 dB |
| FREQUENCY RANGE | 380 - 2700 MHz |
| INSERTION LOSS | |
| Port 1 to 2 or port 1 to 3 | < 3.5 ± 1 dB |
| ISOLATION | |
| Port 1 to 4 or port 2 to 3 | 380 - 960 MHz : > 20 dB |
| | 960 - 2100 MHz : > 15 dB |
| | 2100 - 2700 MHz : > 20 dB |
| IMPEDANCE | Nom. 50 Ω |
| MAX. INPUT POWER | 200 W (composite) |
| SWR ON ALL PORTS | ≤ 1.5 |
| PIM | < 130 dBc @ 2 x 43 dBm |
| COMPLIANCE | RoHS |
| IP RATING | IP67 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | DIN 7/16-female or N-female |
| DIMENSIONS (L x W x H) | 129 x 100 x 46 mm / 5.08 x 3.94 x 1.81 in. (incl. connectors and flanges) |
| WEIGHT | Approx. 865 g / 1.91 lb. |
| MOUNTING | ∅5.2 mm / ∅0.20 in. (4 holes) |

TYPICAL COUPLING, ISOLATION AND SWR CURVES

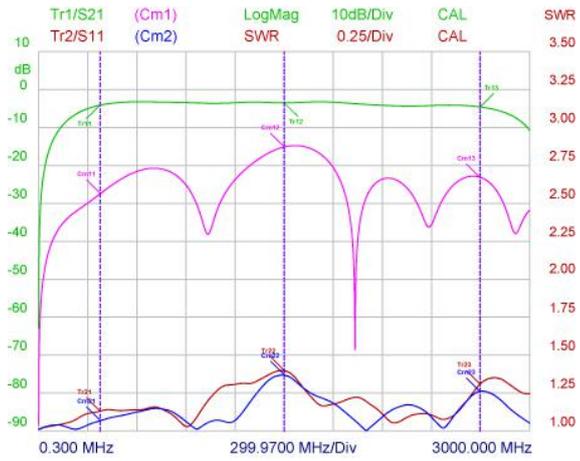

MOUNTING DETAILS

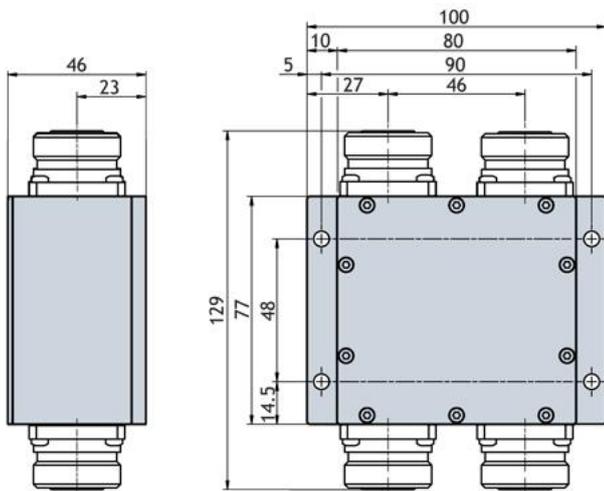



PRO-PDI2-40-1G-10 dB-10W-N

Power Divider 1:10

- 10 W unequal power divider.

DESCRIPTION

- The divider covers the frequency range from 40 - 1000 MHz.
- Very little ripple on divider output over the entire frequency range.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|----------------------------|-------------|
| PRO-PDI2-40-1G-10 dB-10W-N | 210000446 |


SPECIFICATIONS

| ELECTRICAL | |
|---------------------------------|---|
| MODEL | PRO-PDI2-40-1G-10 dB-10W-N |
| FREQUENCY RANGE | 40 - 1000 MHz |
| MAX. INPUT POWER | 10 W |
| NOMINAL DIVIDER LOSS | 0.45 dB |
| TOTALLY LOSS INCL. NOMINAL LOSS | 1.4 dB @ 40 MHz 2.2 dB @ 1000 MHz |
| ISOLATION OUTPUT TO OUTPUT | > 12 dB |
| DIVIDER OUTPUT | -10 dB ± 0.5 dB |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | < 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30°C → +60°C |
| CONNECTORS | N-female |
| DIMENSIONS | 138 (incl. connectors) x 152 (incl. flanges) x 35 mm |
| WEIGHT | Approx. 360 g |

MOUNTING DETAILS

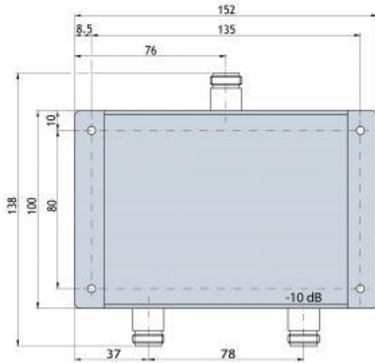

TYPICAL RESPONSE CURVE

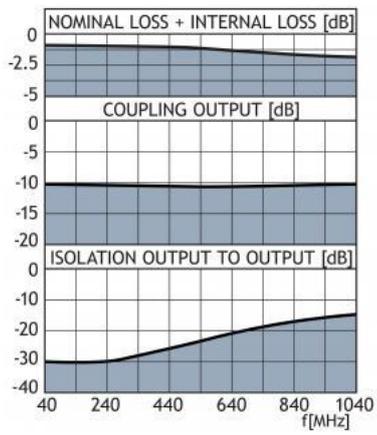



PRO-PDI2-40-1G-7 dB-10W-N

Power Divider 1:5

- 10 W unequal power divider.

DESCRIPTION

- The divider covers the frequency range from 40 - 1000 MHz.
- Very little ripple on divider output over the entire frequency range.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---------------------------|-------------|
| PRO-PDI2-40-1G-7 dB-10W-N | 210000443 |


SPECIFICATIONS

| ELECTRICAL | |
|----------------------------------|---|
| MODEL | PRO-PDI2-40-1G-7 dB-10W-N |
| FREQUENCY RANGE | 40 - 1000 MHz |
| MAX. INPUT POWER | 10 W |
| NOMINAL DIVIDER LOSS | 0.8 dB |
| TOTAL LOSS INCL. NOMINAL LOSS | 2.0 dB @ 40 MHz 2.75 dB @ 1000 MHz |
| ISOLATION OUTPUT TO OUTPUT | > 10 dB |
| DIVIDER OUTPUT | -7.0 dB ± 0.5 dB |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | < 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30°C → +60°C |
| CONNECTORS | N-female |
| DIMENSIONS | 138 (incl. connectors) x 152 (incl. flanges) x 35 mm |
| WEIGHT | Approx. 360 g |

MOUNTING DETAILS

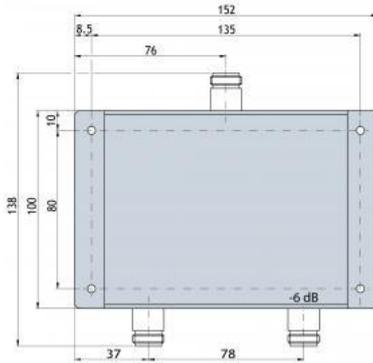

TYPICAL RESPONSE CURVE

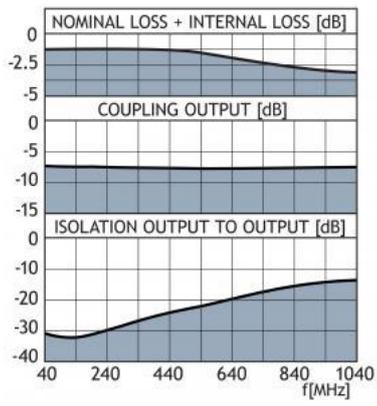



PRO-PDI2-40-1G-6 dB-2.5W-N

Power Divider 1:4

- 2.5 W unequal power divider.
- The divider covers the frequency range from 40 - 1000 MHz.
- Very little ripple on divider output over the entire frequency range.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|----------------------------|-------------|
| PRO-PDI2-40-1G-6 dB-2.5W-N | 210001783 |

SPECIFICATIONS

| ELECTRICAL | |
|-------------------------------|---------------------------------------|
| MODEL | PRO-PDI2-40-1G-6 dB-2.5W-N |
| FREQUENCY RANGE | 40 - 1000 MHz |
| MAX. INPUT POWER | 2.5 W (3 W) |
| NOMINAL DIVIDER LOSS | 1.25 dB |
| TOTAL LOSS INCL. NOMINAL LOSS | 2.3 dB @ 40 MHz 2.75 dB @ 1000 MHz |
| ISOLATION OUTPUT TO OUTPUT | > 10 dB |
| DIVIDER OUTPUT | -6.5 dB - 0.5 dB + 1 dB |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | < 1.75 |
| MECHANICAL | |
| TEMP. RANGE | -30°C → +60°C |
| CONNECTORS | N-female |
| DIMENSIONS | 89 x 56 x 29 mm (incl. connectors) |
| WEIGHT | Approx. 145 g |

TYPICAL RESPONSE CURVE

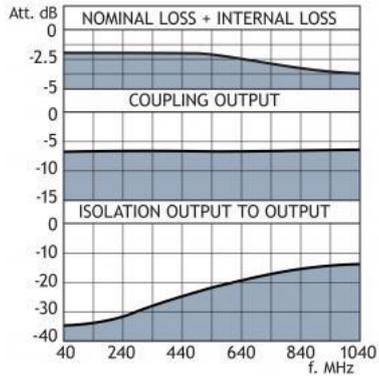



PRO-PDI2-40-1G-6 dB-10W-N

Power Divider 1:4

- 10 W unequal power divider.

DESCRIPTION

- The divider covers the frequency range from 40 - 1000 MHz.
- Very small ripple on divider output over the entire frequency range.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---------------------------|-------------|
| PRO-PDI2-40-1G-6 dB-10W-N | 210000440 |


SPECIFICATIONS

| ELECTRICAL | |
|-------------------------------|---|
| MODEL | PRO-PDI2-40-1G-6 dB-10W-N |
| FREQUENCY RANGE | 40 - 1000 MHz |
| MAX. INPUT POWER | 10 W |
| NOMINAL DIVIDER LOSS | 1.25 dB |
| TOTAL LOSS INCL. NOMINAL LOSS | 2.0 dB @ 40 MHz 3.75 dB @ 1000 MHz |
| ISOLATION OUTPUT TO OUTPUT | > 10 dB |
| DIVIDER OUTPUT | -6.5 dB ± 0.5 dB |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | < 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30°C → +60°C |
| CONNECTORS | N-female |
| DIMENSIONS | 138 (incl. connectors) x 152 (incl. flanges) x 35 mm |
| WEIGHT | Approx. 360 g |

MOUNTING DETAILS

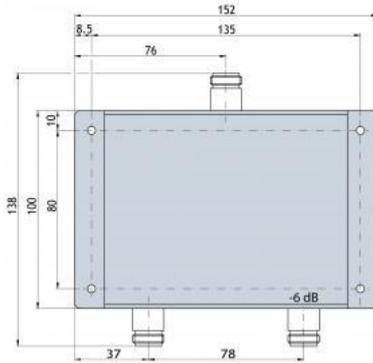

TYPICAL RESPONSE CURVE

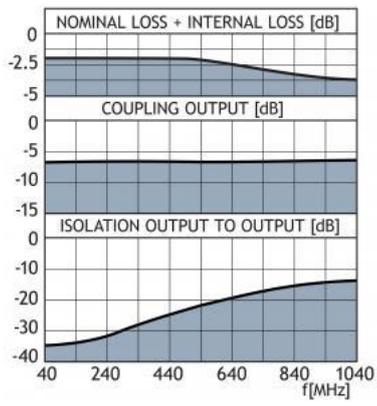



PRO-PDI2-40-1G-20 dB-10W-N

Power Divider 1:100

- 10 W unequal power divider.

DESCRIPTION

- The divider covers the frequency range from 40 - 1000 MHz.
- Very little ripple on divider output over the entire frequency range.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|----------------------------|-------------|
| PRO-PDI2-40-1G-20 dB-10W-N | 210000445 |


SPECIFICATIONS

| ELECTRICAL | |
|----------------------------|---|
| MODEL | PRO-PDI2-40-1G-20 dB-10W-N |
| FREQUENCY RANGE | 40 - 1000 MHz |
| MAX. INPUT POWER | 10 W |
| NOMINAL DIVIDER LOSS | 0.04 dB |
| TOTALLY LOSS INCL. | 0.8 dB @ 40 MHz |
| NOMINAL LOSS | 1.7 dB @ 1000 MHz |
| ISOLATION OUTPUT TO OUTPUT | > 15 dB |
| DIVIDER OUTPUT | -20 dB \pm 1.0 dB |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | < 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30°C \rightarrow +60°C |
| CONNECTORS | N-female |
| DIMENSIONS | 138 (incl. connectors) x 152 (incl. flanges) x 35 mm |
| WEIGHT | Approx. 360 g |

MOUNTING DETAILS

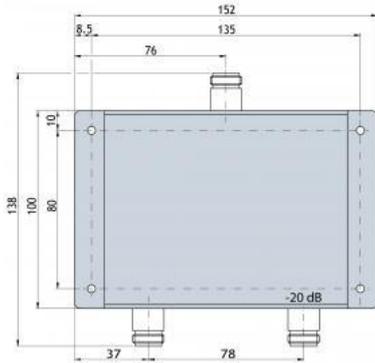

TYPICAL RESPONSE CURVE

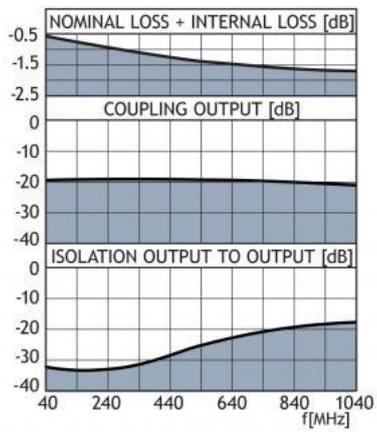



PRO-PDI2-40-1G-20 dB10W-N

Power Divider 1:100

- 10 W unequal power divider.
- The divider covers the frequency range from 40 - 1000 MHz.

DESCRIPTION

Very little ripple on divider output over the entire frequency range.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|----------------------------|-------------|
| PRO-PDI2-40-1G-20 dB-10W-N | 210000445 |


SPECIFICATIONS

| ELECTRICAL | |
|----------------------------|---|
| MODEL | PRO-PDI2-40-1G-20 dB-10W-N |
| FREQUENCY RANGE | 40 - 1000 MHz |
| MAX. INPUT POWER | 10 W |
| NOMINAL DIVIDER LOSS | 0.04 dB |
| TOTALLY LOSS INCL. | 0.8 dB @ 40 MHz |
| NOMINAL LOSS | 1.7 dB @ 1000 MHz |
| ISOLATION OUTPUT TO OUTPUT | > 15 dB |
| DIVIDER OUTPUT | -20 dB \pm 1.0 dB |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | < 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30°C \rightarrow +60°C |
| CONNECTORS | N-female |
| DIMENSIONS | 138 (incl. connectors) x 152 (incl. flanges) x 35 mm |
| WEIGHT | Approx. 360 g |

MOUNTING DETAILS

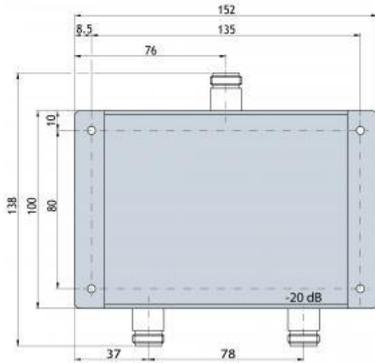

TYPICAL RESPONSE CURVE

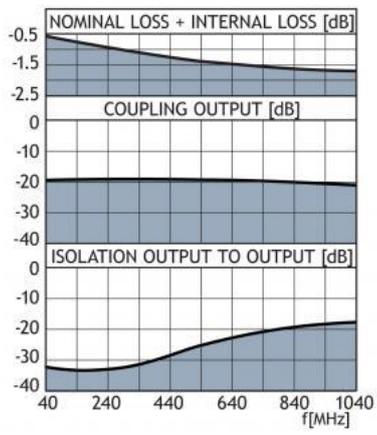



PRO-PDI2-40-1G-10 dB-2.5W-N

Power Divider 1:10

- 2.5 W unequal power divider.

DESCRIPTION

- The divider covers the frequency range from 40 - 1000 MHz.
- Very little ripple on divider output over the entire frequency range.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-----------------------------|-------------|
| PRO-PDI2-40-1G-10 dB-2.5W-N | 210001784 |

SPECIFICATIONS

| ELECTRICAL | |
|----------------------------------|--------------------------------------|
| MODEL | PRO-PDI2-40-1G-10 dB-2.5W-N |
| FREQUENCY RANGE | 40 - 1000 MHz |
| MAX. INPUT POWER | 2.5 W (3 W) |
| NOMINAL DIVIDER LOSS | 0.45 dB |
| TOTAL LOSS INCL. NOMINAL LOSS | 1.4 dB @ 40 MHz 2.2 dB @ 1000 MHz |
| ISOLATION OUTPUT TO OUTPUT | > 12 dB |
| DIVIDER OUTPUT | -10 dB \pm 0.5 dB |
| IMPEDANCE | Nom. 50 Ω |
| INPUT SWR | < 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30°C \rightarrow +60°C |
| CONNECTORS | N-female |
| DIMENSIONS | 89 x 56 x 29 mm (incl. connectors) |
| WEIGHT | Approx. 145 g |

TYPICAL RESPONSE CURVE

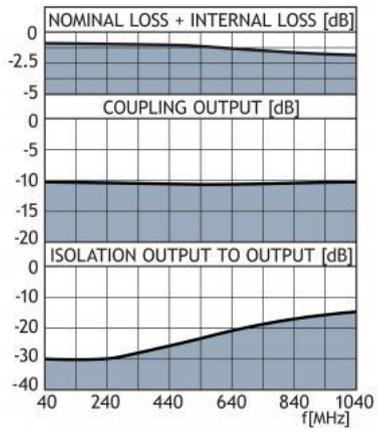



PRO-ATT ... dB-25-3

Attenuator 25 W

- This series includes 3 dB, 6 dB, 10 dB, 20 dB and 30 dB attenuators.

DESCRIPTION

- This series of attenuators has very low SWR and attenuation flatness and is especially suitable for use with:
 - Coaxial Transmission Lines
 - Power Monitors
 - Watt Meters
- The attenuators have a finish of black anodization.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|----------------------------|-------------|
| PRO-ATT 3 dB-25-3-N(f) | 200001732 |
| PRO-ATT 6 dB-25-3-N(f) | 200001750 |
| PRO-ATT 10 dB-25-3-N(f) | 200001751 |
| PRO-ATT 20 dB-25-3-N(f) | 200001724 |
| PRO-ATT 30 dB-25-3-N(f) | 200001752 |
| PRO-ATT 3 dB-25-3-7/16(f) | 200002544 |
| PRO-ATT 6 dB-25-3-7/16(f) | 200002545 |
| PRO-ATT 10 dB-25-3-7/16(f) | 200002541 |
| PRO-ATT 20 dB-25-3-7/16(f) | 200002542 |
| PRO-ATT 30 dB-25-3-7/16(f) | 200002543 |

SPECIFICATIONS

| ELECTRICAL | |
|----------------------|---|
| MODEL | PRO-ATT ... dB-25-3 |
| FREQUENCY RANGE | DC - 3 GHz |
| MAX. INPUT POWER | 25 W |
| ATTENUATION | See table below |
| POWER RATING REMARKS | Unrestricted airflow necessary for operating at maximum power |
| IMPEDANCE | Nom. 50 Ω |
| SWR | <1.25 |
| MECHANICAL | |
| TEMP. RANGE | -35°C → +70°C |



PRO-ATT ... dB-2-3-N

Attenuator 2 W

- This 2 W series includes 3 dB, 6 dB, 10 dB, 20 dB and 30 dB attenuators.

DESCRIPTION

- This series of attenuators has very low SWR and attenuation flatness and is especially suitable for use with:
 - Coaxial Transmission Lines
 - Power Monitors
 - Watt Meters

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---------------------|-------------|
| PRO-ATT 3 dB-2-3-N | 200002212 |
| PRO-ATT 6 dB-2-3-N | 200002213 |
| PRO-ATT 10 dB-2-3-N | 200002087 |
| PRO-ATT 20 dB-2-3-N | 200002214 |
| PRO-ATT 30 dB-2-3-N | 200002215 |

SPECIFICATIONS

| ELECTRICAL | | | |
|--------------------|-------------|------------------------------|---------------|
| FREQUENCY RANGE | | DC - 3 GHz | |
| MAX. INPUT POWER | | 2 W | |
| ATTENUATION | | See table below | |
| IMPEDANCE | | Nom. 50 Ω | |
| SWR | | < 1.25 | |
| MECHANICAL | | | |
| TEMP. RANGE | | -35°C → +70°C | |
| CONNECTORS | | N-male to N-female | |
| DIMENSIONS | | 53 x 21 mm / 2.09 x 0.83 in. | |
| WEIGHT | | Approx. 71 g / 0.16 lb. | |
| MODEL | ATTENUATION | ATT. DEVIATION | |
| | | DC - 2.0 GHz | 2.0 - 3.0 GHz |
| PRO-ATT 3 dB-2-3-N | 3 dB | +/-0.2 dB | +/-0.3 dB |
| PRO-ATT 6 dB-2-3-N | 6 dB | +/-0.2 dB | +/-0.3 dB |



| | | | |
|---------------------|-------|-----------|-----------|
| PRO-ATT 10 dB-2-3-N | 10 dB | +/-0.2 dB | +/-0.3 dB |
| PRO-ATT 20 dB-2-3-N | 20 dB | +/-0.2 dB | +/-0.3 dB |
| PRO-ATT 30 dB-2-3-N | 30 dB | +/-0.5 dB | +/-1.5 dB |



PRO-PDI2-0.8-2.7G-20W-N

Power Divider 20 W

- 20 W Power Divider with broadband characteristics covering the cellular service bands.

DESCRIPTION

- 20 W equal power divider.
- Very low SWR and excellent isolation over the entire frequency range.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------------|-------------|
| PRO-PDI2-0.8-2.7G-20W-N | 200001704 |

SPECIFICATIONS

| ELECTRICAL | |
|---------------------------------------|-------------------------|
| MODEL | PRO-PDI2-0.8-2.7G-20W-N |
| FREQUENCY RANGE | 0.8 - 2.7 GHz |
| ISOLATION | > 20 dB |
| SWR | < 1.2 |
| MAX. INPUT POWER | 20 W |
| NOMINAL DIVIDER LOSS | 3 dB |
| TOTAL LOSS INCL. NOMINAL DIVIDER LOSS | < 3.5 dB |
| DIVIDER OUTPUT | Equal |
| IMPEDANCE | Nom. 50 Ω |
| COMPLIANCE | RoHS, IP66 |
| MECHANICAL | |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 129 x 100 x 33 mm |
| WEIGHT | Approx. 395 g |
| ENVIRONMENTAL | |
| TEMP. RANGE | -35° C → 50° C |

TYPICAL RESPONSE CURVE

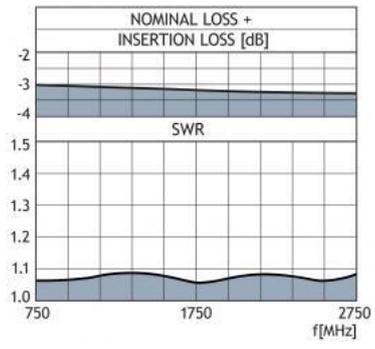



PRO-MPHY450-2-... dB-N-...

2-Channel Hybrid Ring Power Combiner/Divider for the 450 MHz band

- Combines two transmitters or receivers on the same antenna.
- Better utilization of good antenna position.
- The only combining option with very small TX-TX frequency spacing.

DESCRIPTION

- 30 W load built-in.
- Two antennas on the same transmitter or receiver.
- Symmetrical 1:1 dividing ratio (-3 dB).
- Can be delivered with asymmetrical dividing ratio, e.g. -6 dB, -10 dB or -15 dB.
- Centre frequency to be arbitrary specified by the customer within 380 - 475 MHz.

ORDERING DESIGNATIONS


| TYPE | PRODUCT NO. |
|-----------------------|-------------|
| PRO-MPHY450-2-3 dB-N | 210000606 |
| PRO-MPHY450-2-6 dB-N | 210000728 |
| PRO-MPHY450-2-10 dB-N | 210000746 |
| PRO-MPHY450-2-15 dB-N | 210001145 |

SPECIFICATIONS

| ELECTRICAL | |
|--|---|
| MODEL | PRO-MPHY450-2-... dB-N-... |
| FILTER TYPE | Hybrid Ring Junction |
| CENTRE FREQUENCY | To be stated within 380 and 475 MHz |
| MAX. INPUT POWER | 30 W per channel when used as a power combiner. 60 W when used as a power divider. Note: When used as a power combiner, extra cooling is necessary. At 2 x 30 W the unit requires a heatsink with $R_{th} \leq 3^\circ \text{ C/W}$. |
| INSERTION LOSS, SYMMETRICAL DIVIDING RATIO | < 3.4 dB @ ± 5 MHz BW < 3.7 dB @ ± 10 MHz BW |
| ISOLATION | > 35 dB @ ± 5 MHz BW > 30 dB @ ± 10 MHz BW |
| IMPEDANCE | Nom. 50 Ω |
| SWR | < 1.5 within ± 10 MHz from centre frequency, all other ports terminated with 50 Ω . |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female (other types as option) |

| | |
|---------------------------|--|
| DIMENSIONS (L x W x H) | 138 (incl. conn.) x 152 (incl. flanges) x 35 mm |
| WEIGHT | Approx. 350 g |

TYPICAL RESPONSE CURVE

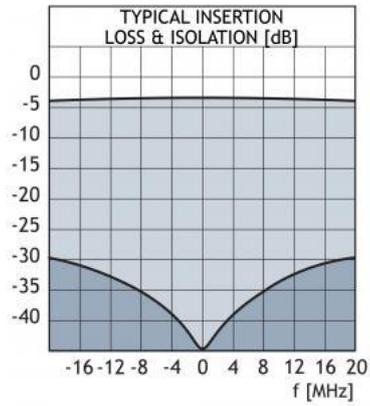



PRO-MPHY150-2-... dB

2-Channel Hybrid Ring Power Combiner/Divider for the 150 MHz band

- Combines two transmitters or receivers on the same antenna.
- Better utilization of good antenna position.
- The only combining option with very small TX-TX frequency spacing.

DESCRIPTION

- 30 W load built-in.
- Two antennas on the same transmitter or receiver.
- Symmetrical 1:1 dividing ratio (-3 dB).
- Can be delivered with asymmetrical dividing ratio, e.g. -6 dB, -10 dB, -20 dB or -30 dB.
- Centre frequency to be specified by the customer within 150 - 175 MHz.

ORDERING DESIGNATIONS


| TYPE | PRODUCT NO. |
|--------------------------|-------------|
| PRO-MPHY150-2-3 dB-N(f) | 210000514 |
| PRO-MPHY150-2-6 dB-N(f) | 210001431 |
| PRO-MPHY150-2-10 dB-N(f) | 210000624 |
| PRO-MPHY150-2-20 dB-N(f) | 210000752 |
| PRO-MPHY150-2-30 dB-N(f) | 210000725 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------|---|
| MODEL | PRO-MPHY150-2-.. dB |
| FILTER TYPE | Hybrid Ring Junction |
| CENTRE FREQUENCY | To be stated within 150 and 175 MHz |
| MAX. INPUT POWER | 30 W per channel when used as a power combiner. 60 W when used as a power divider. Note: When used as a power combiner, extra cooling is necessary. At 2 x 30 W the unit requires a heatsink with $R_{th} \leq 3^\circ \text{ C/W}$. |
| INSERTION LOSS | < 3.3 dB @ ± 12 MHz BW |
| ISOLATION | > 35 dB @ ± 6 MHz BW > 30 dB @ ± 12 MHz BW |
| IMPEDANCE | Nom. 50 Ω |
| SWR | < 1.3 within ± 10 MHz from centre frequency, all other ports terminated with 50 Ω . |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |

| | |
|---------------------------|--|
| CONNECTORS | N-female (other types as option) |
| DIMENSIONS (L x W x H) | 138 (incl. conn.) x 152 (incl. flanges) x 35 mm |
| WEIGHT | Approx. 450 g |

TYPICAL RESPONSE CURVE

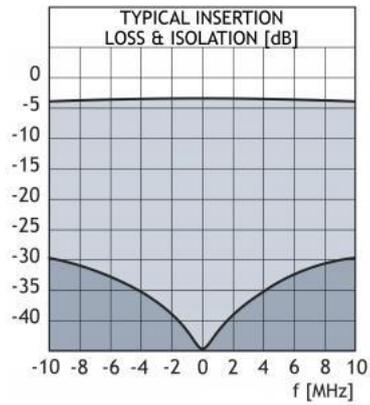



PRO-MMU 0.8-2.5G-200W-N

Power Splitter 200 W

- 200 W equal Power Splitter with broad-band characteristic covering the cellular service bands.
- Excellent high power performance.

DESCRIPTION

- Very low SWR and IL over the entire frequency range.
- Compliant with RoHS and IP66.


ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------------------|-------------|
| PRO-MMU 0.8-2.5G-200W-N | 200001718 |

SPECIFICATIONS

| ELECTRICAL | |
|---------------------------------------|-------------------------|
| MODEL | PRO-MMU 0.8-2.5G-200W-N |
| FREQUENCY RANGE | 0.8 - 2.5 GHz |
| WAY | 2 |
| SWR | < 1.2 |
| MAX. INPUT POWER | 200 W |
| NOMINAL SPLITTER LOSS | 3 dB |
| TOTAL LOSS INCL.NOMINAL SPLITTER LOSS | < 3.5 dB |
| COMPLIANCE | RoHS, IP66 |
| DIVIDER OUTPUT | Equal |
| IMPEDANCE | Nom. 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -35° C → +50° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 212 x 61 x 26 mm |
| WEIGHT | Approx. 401 g |

TYPICAL RESPONSE CURVE

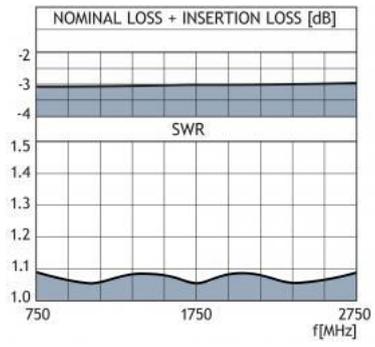



PRO-COM450-HDAR-4/...

4-Channel 19

- An integrated single tray combining solution housing a 4-channel hybrid TX hybrid combiner, duplex filter, active RX multicouplers and preselector.
- Minimal rack space required - only 3 HU.

DESCRIPTION

- Compatible with digital 6.25 kHz channel spacing.
- Single TX isolators fitted as standard (dual isolators available as option).
- 4 RX ports as standard.
- Please specify TX / RX frequencies when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---|-------------|
| PRO-COM450-HDAR-4/l | 210001788 |
| PRO-COM450-HDAR-4/h | 210001855 |
| PRO-COM450-BHDAR-4/l (With black frontplate) | 210002348 |
| PRO-COM450-BHDAR-4/h (With black frontplate) | 210002349 |
| ACCESSORIES | |
| ADAPTOR AC/DC 12V EU | 240000040 |
| ADAPTOR AC/DC 12V UK | 240000041 |

SPECIFICATIONS

| ELECTRICAL | |
|--|--------------------------------------|
| MODEL | PRO-COM450-HDAR-4/... |
| FREQUENCY RANGE | l: 340 - 400 MHz h: 406 - 470 MHz |
| MAX. INPUT POWER PER CH | 50 W |
| MAX. TX-TX SPACING, Δ TX | 2.0 MHz |
| MIN. TX-RX SPACING | 5 MHz |
| INSERTION LOSS - TX PATH | < 8.0 dB |
| TX-TX ISOLATION | > 70 dB |
| ANT-TX ISOLATION | > 40 dB @ 25° C |
| RX ISOLATION IN TX BAND TX-TX spacing < 0.5 MHz | > 85 dB > 65 dB |

| | |
|---|---|
| TX-TX spacing > 0.5 MHz | |
| TX ISOLATION IN RX BAND RX-RX spacing < 0.5 MHz RX-RX spacing > 0.5 MHz | > 85 dB > 65 dB |
| RX-RX ISOLATION | > 20 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| LNA NOISE FIGURE | < 3.5 dB |
| GAIN - RX PATH | 1 dB +/- 1 dB (factory set) |
| CURRENT CONSUMPTION | 500 mA @ 12 VDC |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| CONNECTORS | N-female |
| DIMENSIONS | 19" x 3 HU x 500 mm (483 x 133 x 500 mm) |
| WEIGHT | Approx. 7.5 kg |

ADAPTOR AC/DC 12V EU



ADAPTOR AC/DC 12V UK





PRO-COM450-HDAR-3/...

3-Channel 19

- An integrated single tray combining solution housing a 3-channel hybrid TX hybrid combiner, duplex filter, active RX multicouplers and preselector.
- Minimal rack space required - only 3 HU.

DESCRIPTION

- Compatible with digital 6.25 kHz channel spacing.
- Single TX isolators fitted as standard (dual isolators available as option).
- 4 RX ports as standard.
- Please specify TX / RX frequencies when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---|-------------|
| PRO-COM450-HDAR-3/l | 210002094 |
| PRO-COM450-HDAR-3/h | 210001924 |
| PRO-COM450-BHDAR-3/l (With black frontplate) | 210002346 |
| PRO-COM450-BHDAR-3/h (With black frontplate) | 210002347 |
| ACCESSORIES | |
| ADAPTOR AC/DC 12V EU | 240000040 |
| ADAPTOR AC/DC 12V UK | 240000041 |

SPECIFICATIONS

| ELECTRICAL | |
|--------------------------|--------------------------------------|
| MODEL | PRO-COM450-HDAR-3/... |
| FREQUENCY RANGE | l: 340 - 400 MHz h: 406 - 470 MHz |
| MAX. INPUT POWER PER CH | 50 W |
| MAX. TX-TX SPACING, Δ TX | 2.0 MHz |
| MIN. TX-RX SPACING | 5 MHz |
| INSERTION LOSS - TX PATH | < 7.0 dB |
| TX-TX ISOLATION | > 70 dB |
| ANT-TX ISOLATION | > 40 dB @ 25° C |


| | |
|---|---|
| RX ISOLATION IN TX BAND TX-TX spacing < 0.5 MHz TX-TX spacing > 0.5 MHz | > 85 dB > 65 dB |
| TX ISOLATION IN RX BAND RX-RX spacing < 0.5 MHz RX-RX spacing > 0.5 MHz | > 85 dB > 65 dB |
| RX-RX ISOLATION | > 20 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| LNA NOISE FIGURE | < 3.5 dB |
| GAIN - RX PATH | 1 dB +/- 1 dB (factory set) |
| CURRENT CONSUMPTION | 500 mA @ 12 VDC |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| CONNECTORS | N-female |
| DIMENSIONS | 19" x 3 HU x 500 mm (483 x 133 x 500 mm) |
| WEIGHT | Approx. 7.0 kg |

ADAPTOR AC/DC 12V EU



ADAPTOR AC/DC 12V UK



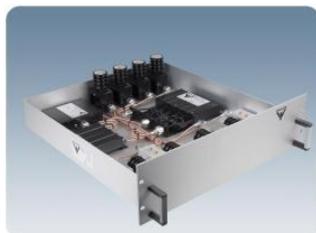

PRO-COM150-HDAR-4/...

4-Channel 19

- An integrated single tray combining solution housing a 4-channel hybrid TX hybrid combiner, duplex filter, active RX multicouplers and preselector.
- Minimal rack space required - only 3 HU.

DESCRIPTION

- Compatible with digital 6.25 kHz channel spacing.
- Single TX isolators fitted as standard (dual isolators available as option).
- 4 RX ports as standard.
- Please specify TX / RX frequencies when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---|-------------|
| PRO-COM150-HDAR-4/l | 210001857 |
| PRO-COM150-HDAR-4/h | 210001856 |
| PRO-COM150-BHDAR-4/l (With black frontplate) | 210002342 |
| PRO-COM150-BHDAR-4/h (With black frontplate) | 210002343 |
| ACCESSORIES | |
| ADAPTOR AC/DC 12V EU | 240000040 |
| ADAPTOR AC/DC 12V UK | 240000041 |

SPECIFICATIONS

| ELECTRICAL | |
|--|--------------------------------------|
| MODEL | PRO-COM150-HDAR-4/... |
| FREQUENCY RANGE | l: 136 - 156 MHz h: 152 - 175 MHz |
| MAX. INPUT POWER PER CH | 50 W |
| MAX. TX-TX SPACING, Δ TX | 1.5 MHz |
| MIN. TX-RX SPACING | 4 MHz |
| INSERTION LOSS - TX PATH | < 8.0 dB |
| TX-TX ISOLATION | > 70 dB |
| ANT-TX ISOLATION | > 40 dB @ 25° C |
| RX ISOLATION IN TX TX-TX spacing < 0.5 MHz TX-TX spacing > 0.5 MHz | > 80 dB > 60 dB |

| | |
|--|---|
| TX ISOLATION IN RX RX-RX spacing < 0.5 MHz RX-RX spacing > 0.5 MHz | > 80 dB > 60 dB |
| RX-RX ISOLATION | > 20 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| LNA NOISE FIGURE | < 3.5 dB |
| GAIN - RX PATH | 1 dB +/- 1 dB (factory set) |
| CURRENT CONSUMPTION | 500 mA @ 12 VDC |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS | 19" x 3 HU x 500 mm (483 x 133 x 500 mm) |
| WEIGHT | Approx. 7.5 kg |

ADAPTOR AC/DC 12V EU



ADAPTOR AC/DC 12V UK





PRO-COM150-HDAR-3/...

3-Channel 19

- An integrated single tray combining solution housing a 3-channel hybrid TX hybrid combiner, duplex filter, active RX multicouplers and preselector.
- Minimal rack space required - only 3 HU.

DESCRIPTION

- Compatible with digital 6.25 kHz channel spacing.
- Single TX isolators fitted as standard (dual isolators available as option).
- 4 RX ports as standard.
- Please specify TX / RX frequencies when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---|-------------|
| PRO-COM150-HDAR-3/l | 210002050 |
| PRO-COM150-HDAR-3/h | 210002002 |
| PRO-COM150-BHDAR-3/l (With black frontplate) | 210002340 |
| PRO-COM150-BHDAR-3/h (With black frontplate) | 210002341 |
| ACCESSORIES | |
| ADAPTOR AC/DC 12V EU | 240000040 |
| ADAPTOR AC/DC 12V UK | 240000041 |

SPECIFICATIONS

| ELECTRICAL | |
|--------------------------|--------------------------------------|
| MODEL | PRO-COM150-HDAR-3/... |
| FREQUENCY RANGE | l: 136 - 156 MHz h: 152 - 175 MHz |
| MAX. INPUT POWER PER CH | 50 W |
| MAX. TX-TX SPACING, Δ TX | 1.5 MHz |
| MIN. TX-RX SPACING | 4 MHz |
| INSERTION LOSS - TX PATH | < 7.0 dB |
| TX-TX ISOLATION | > 70 dB |
| ANT-TX ISOLATION | > 40 dB @ 25° C |
| RX ISOLATION IN TX | > 80 dB |

| | |
|--|-----------------------------|
| TX-TX spacing < 0.5 MHz TX-TX spacing > 0.5 MHz | > 60 dB |
| TX ISOLATION IN RX RX-RX spacing < 0.5 MHz RX-RX spacing > 0.5 MHz | > 80 dB > 60 dB |
| RX-RX ISOLATION | > 20 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| LNA NOISE FIGURE | < 3.5 dB |
| GAIN - RX PATH | 1 dB +/- 1 dB (factory set) |
| CURRENT CONSUMPTION | 500 mA @ 12 VDC |

| MECHANICAL | |
|-------------|---|
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS | 19" x 3 HU x 500 mm (483 x 133 x 500 mm) |
| WEIGHT | Approx. 7.0 kg |

ADAPTOR AC/DC 12V EU



ADAPTOR AC/DC 12V UK







PRO-COM150-SRC-2

2-Channel VHF Simplex Relay Combiner

- The PRO-COM150-SRC-2 is an integrated single-tray solution to combine two simplex radios to one antenna.
- When transmitting on one channel, the other channels change to LOAD to make sure that the system is secured against a simultaneous transmission on two channels.
- Minimal rack space required - only 1HU
- Please specify TX / RX frequencies when ordering.

DESCRIPTION

- The PRO-COM150-SRC-2 is a 2-channel VHF simplex combiner with active relays for controlling the switching between TX and RX. The simplex combiner gives the possibility to combine two simplex radios to one antenna. In the RX path a bandpass filter, an isolator and LNA is included.
- The simplex combiner safeguards that both radio transmitters do not have access to the antenna at the same time, but the two radios are still able to listen on the RX channel simultaneously.
- The first radio that enables the transmitter will be able to transmit while the output of the other transmitter will be switched to a internal load. When the first radio that enabled the transmitter stops transmitting the other transmitter is switched to the antenna and allowed to transmit.
- If no radio is transmitting, the system is in listening mode and both radios are able to receive the signal from the antenna.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|----------------------|-------------|
| PRO-COM150-SRC-2 | 210002127 |
| ACCESSORIES | |
| ADAPTOR AC/DC 12V EU | 240000040 |
| ADAPTOR AC/DC 12V UK | 240000041 |

SPECIFICATIONS

| ELECTRICAL | |
|---------------------|--------------------|
| MODEL | PRO-COM150-SRC-2 |
| REQUENCY RANGE | 144 - 174 MHz |
| RX BANDWIDTH | 4 MHz |
| INPUT POWER PER CH | Min. 3 W Max. 50 W |
| SWITCH TIME TX/RX/: | < 5 ms |
| TX/RX ISOLATION | 60 dB |
| TX/TX ISOLATION | 60 dB |
| IMPEDANCE | Nom. 50 Ω |
| | |

| | |
|-----------------------------|--|
| SWR | ≤ 1.5 |
| LNA NOISE FIGURE | < 1.2 dB |
| GAIN - RX PATH | 2 dB (factory set) |
| CURRENT CONSUMPTION | 500 mA @ 12 VDC |
| NUMBER OF SWITCH OPERATIONS | 10^7 |
| MECHANICAL | |
| TEMP. RANGE | -30° C to +60° C |
| CONNECTORS | N-female |
| DIMENSIONS | 19" x 1 HU x 300 mm (483 x 133 x 400 mm) 19 x 5.2 x 15.7 in. |
| WEIGHT | Approx. 2.8 kg |


ADAPTOR AC/DC 12V EU



ADAPTOR AC/DC 12V UK



BLOCK DIAGRAM

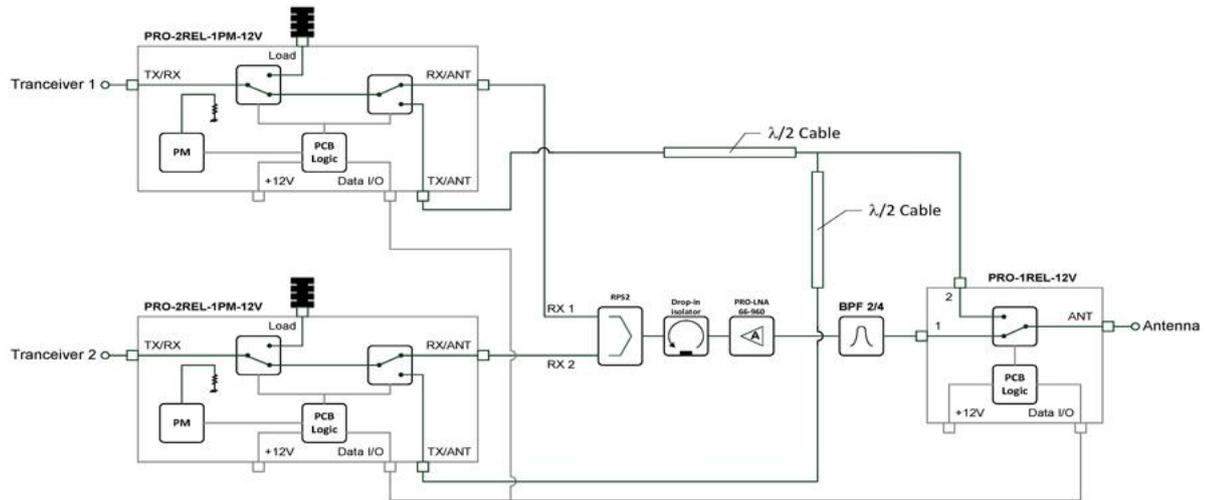



PRO-CAV85-7

7-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------|-------------|
| PRO-CAV85-7 | 210001281 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---------------------------------|
| MODEL | PRO-CAV85-7 |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 50 kHz |
| TYP. INSERTION LOSS | 4.0 dB @ $\Delta_{TX} = 75$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 19" x 34 HU x 1200 mm |



| | |
|--------|------------------------|
| | (483 x 1511 x 1200 mm) |
| WEIGHT | Approx. 77.6 kg |



PRO-CAV85-6

6-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE NO. | PRODUCT NO. |
|-------------|-------------|
| PRO-CAV85-6 | 210001291 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-CAV85-6 |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 50 kHz |
| TYP. INSERTION LOSS | 3.9 dB @ $\Delta_{TX} = 75$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 30 HU x 1200 mm (483 x 1333 x 1200 mm) |



| | |
|--------|-----------------|
| WEIGHT | Approx. 65.2 kg |
|--------|-----------------|



PRO-CAV85-5

5-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------|-------------|
| PRO-CAV85-5 | 210001292 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-CAV85-5 |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 50 kHz |
| TYP. INSERTION LOSS | 3.8 dB @ $\Delta_{TX} = 75$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 26 HU x 1200 mm (483 x 1156 x 1200 mm) |



| | |
|--------|-----------------|
| WEIGHT | Approx. 55.1 kg |
|--------|-----------------|



PRO-CAV85-4

4-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------|-------------|
| PRO-CAV85-4 | 210000149 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|--|
| MODEL | PRO-CAV85-4 |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 50 kHz |
| TYP. INSERTION LOSS | 3.6 dB @ $\Delta_{TX} = 75$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 19 HU x 1200 mm (483 x 845 x 1200 mm) |
| WEIGHT | Approx. 45 kg |



PRO-CAV85-3

3-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------|-------------|
| PRO-CAV85-3 | 210000150 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|--|
| MODEL | PRO-CAV85-3 |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 50 kHz |
| TYP. INSERTION LOSS | 3.1 dB @ $\Delta_{TX} = 75$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 15 HU x 1200 mm (483 x 667 x 1200 mm) |
| WEIGHT | Approx. 32.6 kg |



PRO-CAV85-2

2-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX and RX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------|-------------|
| PRO-CAV85-2 | 210001252 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|--|
| MODEL | PRO-CAV85-2 |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 50 kHz |
| TYP. INSERTION LOSS | 2.6 dB @ $\Delta_{TX} = 75$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 11 HU x 1200 mm (483 x 489 x 1200 mm) |
| WEIGHT | Approx. 22.5 kg |



PRO-CAV450-8

8-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV450-8 | 210000212 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-CAV450-8 |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 250 kHz |
| TYP. INSERTION LOSS | 3.8 dB @ $\Delta_{TX} = 450$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 38 HU x 300 mm (483 x 1689 x 300 mm) |
| WEIGHT | Approx. 39.2 kg |





PRO-CAV450-7

7-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV450-7 | 210000419 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|----------------------------------|
| MODEL | PRO-CAV450-7 |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 250 kHz |
| TYP. INSERTION LOSS | 3.7 dB @ $\Delta_{TX} = 450$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 34 HU x 300 mm |



| | |
|--------|-----------------------|
| | (483 x 1511 x 300 mm) |
| WEIGHT | Approx. 33.3 kg |



PRO-CAV450-6

6-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE NO. | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV450-6 | 210000299 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-CAV450-6 |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 250 kHz |
| TYP. INSERTION LOSS | 3.6 dB @ $\Delta_{TX} = 450$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 30 HU x 300 mm (483 x 1333 x 300 mm) |



| | |
|--------|-----------------|
| WEIGHT | Approx. 27.4 kg |
|--------|-----------------|



PRO-CAV450-5

5-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV450-5 | 210000303 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-CAV450-5 |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 250 kHz |
| TYP. INSERTION LOSS | 3.5 dB @ $\Delta_{TX} = 450$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 26 HU x 300 mm (483 x 1156 x 300 mm) |



| | |
|--------|-----------------|
| WEIGHT | Approx. 23.5 kg |
|--------|-----------------|



PRO-CAV450-4

4-Channel Cavity

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV450-4 | 210000171 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|--|
| MODEL | PRO-CAV450-4 |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 250 kHz |
| TYP. INSERTION LOSS | 3.3 dB @ $\Delta_{TX} = 450$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 19" x 19 HU x 300 mm (483 x 845 x 300 mm) |
| WEIGHT | Approx. 19.6 kg |





PRO-CAV450-3

3-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV450-3 | 210000157 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|--|
| MODEL | PRO-CAV450-3 |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 250 kHz |
| TYP. INSERTION LOSS | 2.8 dB @ $\Delta_{TX} = 450$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 15 HU x 300 mm (483 x 667 x 300 mm) |
| WEIGHT | Approx. 13.7 kg |



PRO-CAV450-2

2-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX and RX when ordering.

Ordering Designations

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV450-2 | 210000400 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|--|
| MODEL | PRO-CAV450-2 |
| TX FREQUENCY | 380 - 475 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 250 kHz |
| TYP. INSERTION LOSS | 2.3 dB @ $\Delta_{TX} = 450$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 11 HU x 300 mm (483 x 489 x 300 mm) |
| WEIGHT | Approx. 9.8 kg |



PRO-CAV130-8

8-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV130-8 | 210002320 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|--|
| MODEL | PRO-CAV130-8 |
| TX FREQUENCY | 116 - 146 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 3.7 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 38 HU x 765 (483 x 1689 x 765 mm) |
| WEIGHT | 67.4 kg |





PRO-CAV150-7

7-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV150-7 | 210001282 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|----------------------------------|
| MODEL | PRO-CAV150-7 |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 3.6 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 34 HU x 600 |



| | |
|--------|-----------------------|
| | (483 x 1511 x 600 mm) |
| WEIGHT | Approx. 43.8 kg |



PRO-COM450-HDAR-2/...

2-Channel 19

- An integrated single tray combining solution housing a 2-channel hybrid TX hybrid combiner, duplex filter, active RX multicouplers and preselector.
- Minimal rack space required - only 3 HU.

DESCRIPTION

- Compatible with digital 6.25 kHz channel spacing.
- Single TX isolators fitted as standard (dual isolators available as option).
- 2 RX ports as standard (4 ports available as option).
- Please specify TX / RX frequencies when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---|-------------|
| PRO-COM450-HDAR-2/l | 210001739 |
| PRO-COM450-HDAR-2/h | 210001738 |
| PRO-COM450-BHDAR-2/l (With black frontplate) | 210002344 |
| PRO-COM450-BHDAR-2/h (With black frontplate) | 210002345 |
| ACCESSORIES | |
| ADAPTOR AC/DC 12V EU | 240000040 |
| ADAPTOR AC/DC 12V UK | 240000041 |

SPECIFICATIONS

| ELECTRICAL | |
|--------------------------|--------------------------------------|
| MODEL | PRO-COM450-HDAR-2/... |
| FREQUENCY RANGE | l: 340 - 400 MHz h: 406 - 470 MHz |
| MAX. INPUT POWER PER CH | 35 W |
| MAX. TX-TX SPACING, Δ TX | 2.0 MHz |
| MIN. TX-RX SPACING | 5 MHz |
| INSERTION LOSS - TX PATH | < 5.0 dB |
| TX-TX ISOLATION | > 70 dB |
| ANT-TX ISOLATION | > 40 dB @ 25° C |

| | |
|---|---|
| RX ISOLATION IN TX BAND TX-TX spacing < 0.5 MHz TX-TX spacing > 0.5 MHz | > 85 dB > 65 dB |
| TX ISOLATION IN RX BAND RX-RX spacing < 0.5 MHz RX-RX spacing > 0.5 MHz | > 85 dB > 65 dB |
| RX-RX ISOLATION | > 20 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| LNA NOISE FIGURE | < 3.5 dB |
| GAIN - RX PATH | 1 dB +/- 1 dB (factory set) |
| CURRENT CONSUMPTION | 500 mA @ 12 VDC |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| CONNECTORS | N-female |
| DIMENSIONS | 19" x 3 HU x 400 mm (483 x 133 x 400 mm) |
| WEIGHT | Approx. 6.3 kg |

ADAPTOR AC/DC 12V EU



ADAPTOR AC/DC 12V UK





PRO-CAV85-8

8-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|-------------|-------------|
| PRO-CAV85-8 | 210001209 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-CAV85-8 |
| TX FREQUENCY | 66 - 88 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 50 kHz |
| TYP. INSERTION LOSS | 4.1 dB @ $\Delta_{TX} = 75$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 19" x 38 HU x 1200 mm (483 x 1689 x 1200 mm) |
| WEIGHT | Approx. 90 kg |





PRO-CAV150-5

5-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV150-5 | 210000297 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|--|
| MODEL | PRO-CAV150-5 |
| TX FREQUENCY | 144 - 175 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 3.4 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 26 HU x 600 (483 x 1156 x 600 mm) |



| | |
|--------|---------------|
| WEIGHT | Approx. 31 kg |
|--------|---------------|



PRO-CAV150-4

4-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV150-4 | 210001547 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-CAV150-4 |
| TX FREQUENCY | 144 - 175 MHz (other frequencies on request) |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 3.2 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 19 HU x 600 (483 x 845 x 600 mm) |



| | |
|--------|-----------------|
| WEIGHT | Approx. 25.6 kg |
|--------|-----------------|



PRO-CAV150-3

3-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV150-3 | 210000168 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-CAV150-3 |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 2.7 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 19" x 15 HU x 600 (483 x 667 x 600 mm) |
| WEIGHT | Approx. 18.2 kg |



PRO-CAV150-2

2-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION


- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX and RX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV150-2 | 210000172 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-CAV150-2 |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 2.2 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 11 HU x 600 (483 x 489 x 600 mm) |
| WEIGHT | Approx. 12.8 kg |

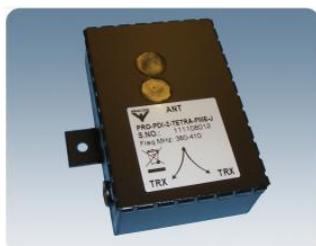

PRO-PDI-2-TETRA-FME-J-...

TETRA combiner with SWR adaption/adjustment network

Replaced by PHY-TETRA-2-FME-...

- Combiner for coupling of two TETRA mobile transceivers on one common antenna.
- Factory-adjusted to either 380 to 410 MHz or 410 to 430 MHz.
- Compact dimensions - especially suitable for mobile applications.

DESCRIPTION

- FME-connectors for direct connection of FME-cable without extra adapter.
- For parallel operation of two two-way communication radios (transceivers) where highest possible decoupling (isolation) is necessary.
- Integrated SWR adjustment network for optimization of isolation in the frequency range of 380 to 410 MHz or 410 to 430 MHz. Via the adjustment network the effective SWR of the antenna can be optimized and consequently the isolation between the ports of the combiner clearly improved.
- High isolation obtainable: Up to 50 dB (Dependant on the SWR of the connected antenna).
- The adjustment of the SWR adjustment network takes place via built-in variable capacitors.
- Max. TETRA transmitter power 2 x 5 W.
- Also usable as equal or unequal power divider for max. 10 W.
- Very small ripple over the total frequency range.

ORDERING DESIGNATIONS


| TYPE | PRODUCT NO. |
|-------------------------------|---|
| PRO-PDI-2-TETRA-FME-J-380-410 | Replaced by PHY-TETRA-2-FME-... |
| PRO-PDI-2-TETRA-FME-J-410-430 | |

SPECIFICATIONS


| ELECTRICAL | |
|--|---|
| MODEL | PRO-PDI-2-TETRA-FME-J-... |
| FREQUENCY | 380 - 410 MHz or 410 - 430 MHz |
| MAX. INPUT POWER (TETRA) | 1 x 10 W if used as divider 2 x 5 W if used as coupler |
| NOMINAL DIVIDER LOSS | 3.0 dB |
| TOTAL LOSS INCL. SPLITTER LOSS /COUPLER LOSS | < 3.5 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | < 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTOR TYPE | FME-connectors |
| DIMENSIONS (L x W x H) | 80 x 76 (inclusive of mounting plate) x 28 mm |

| | |
|----------|-------------------|
| WEIGHT | Approx. 360 g |
| MOUNTING | ø4 mm (two holes) |


MOUNTING DETAILS

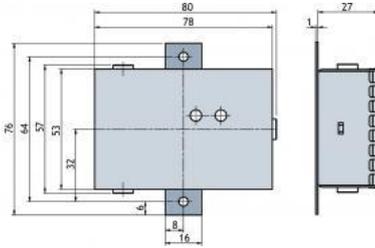

TYPICAL RESPONSE CURVE

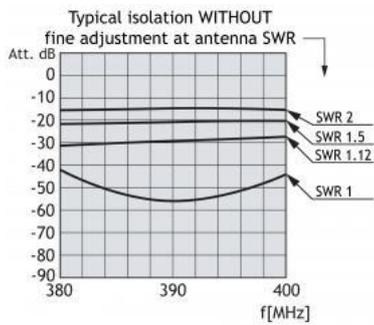

TYPICAL RESPONSE CURVE

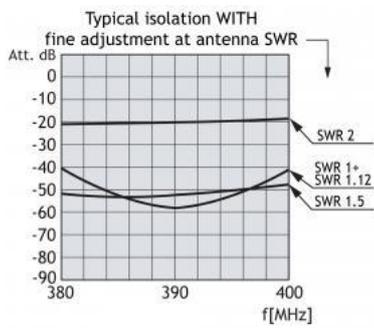



PRO-ISO-PHY-TETRA-S-ELW

Two TMO TETRA Mobile-Station and one DMO TETRA Mobile Station

- The PRO-ISO-PHY-TETRA-S-ELW combiner provides the possibility of connecting two TMO and one DMO TETRA radios into one common antenna.
- ETSI and DIN-SPEC 14507-2 compliant connection of two digital radios.

DESCRIPTION

- The PRO-ISO-PHY-TETRA-S-ELW supports Direct Mode Operation (DMO), giving one TETRA mobile radio the ability to communicate in direct mode.
- The PRO-ISO-PHY-TETRA-S-ELW is the successor to the PRO-ISO-PHY-TETRA-ELW.
- The PRO-ISO-PHY-TETRA-S-ELW has improved isolation between the ports - more than 60 dB - and lower insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- Built-in high-pass filter, for attenuating interference from 150 - 174 MHz and 74 - 87.5 MHz bands.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Also available in tray for 19" rack mounting.
- Vibration and shock tested in accordance with EN-60068**.

**Tested in accordance with:

Random test: EN 60068-2-64, test specification: EN 300 019-2-5 V3.0.0.

Shock test: EN 60068-2-27, test specification: EN 300 019-2-5 V3.0.0.

Bump test: EN 60068-2-29, test specification: EN 300 019-2-5 V3.0.0.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--|-------------|
| PRO-ISO-PHY-TETRA-S-ELW-N(f) | 210002226 |
| ACCESSORIES | |
| 19" Front plate with connectors in front | 210002300 |
| 19" Front plate with connectors in back | 210002301 |

Compatible DMO-modes

The PRO-ISO-PHY-TETRA-S-ELW is compatible with the following DMO modes in 406 - 410 MHz band:

- DM-MS
- DM-REP (1A)

SPECIFICATIONS


| ELECTRICAL | |
|-----------------|-------------------------|
| MODEL | PRO-ISO-PHY-TETRA-S-ELW |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 380 - 385 MHz |

| | |
|---------------------------|--|
| | RX: 390 - 395 MHz |
| DMO FREQUENCY * | 406 - 410 MHz |
| INSERTION LOSS TX-ANT. | < 7 dB |
| INSERTION LOSS RX-ANT. | < 7 dB |
| INSERTION LOSS DMO-ANT | < 2 dB |
| ISOLATION TRX →TRX | TX - TX: > 62 dB (380 - 385 MHz) RX - RX: > 62 dB (390 - 395 MHz) TX - RX / RX - TX: > 62 dB |
| ISOLATION DMO-TMO | > 60 dB |
| MAX. POWER | 25 W / station |
| SWR | < 1.5 |
| GROUP DELAY VARIATION | TX-ANT. : < 120 nsec. RX-ANT. : < 150 nsec. |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Black |
| DIMENSIONS (L x W x H) | 150 (excl. conn.) x 200 x 35 mm / 5.91 (excl. conn.) x 7.87 x 1.38 in. |
| WEIGHT | Approx. 1940 g / 4.28 lb. |
| ENVIRONMENTAL | |
| IP-GRADE | IP-62 |


*** Compatible DMO-modes**

The PRO-ISO-PHY-TETRA-S-ELW is compatible with the following DMO modes in 406 - 410 MHz band:
 - DM-MS
 - DM-REP (1A)


TYPICAL ATTENUATION VALUES

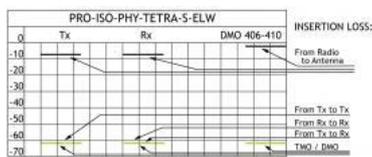



The built-in high-pass filter attenuates large signal interference and harmonic from radiosystems below 174 MHz.

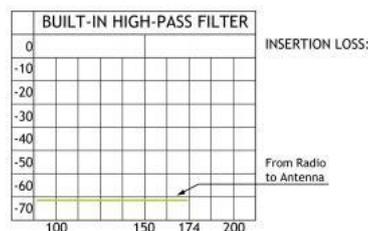

CONNECTION DIAGRAM

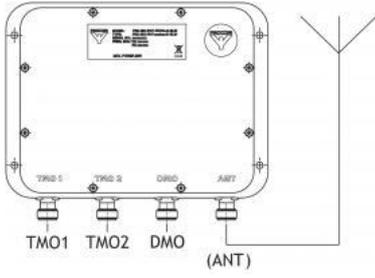

MOUNTING DETAILS

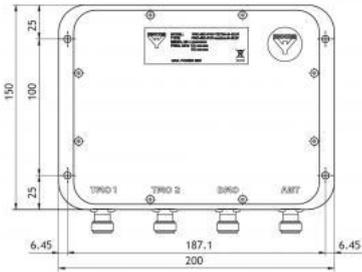

19" Front plate with connectors in front (210002300)



19" Front plate with connectors in back (210002301)





PRO-ISO-PHY-TETRA-S2

Two-TETRA-Station Combiner

- The PRO-ISO-PHY-TETRA-S2 combiner provides the possibility of connecting up to two TETRA radios into one common antenna.
- The PRO-ISO-PHY-TETRA-S2 models are available in the frequency range 380 - 470 MHz (on request).
- ETSI compliant connection of two digital radios.
- The PRO-ISO-PHY-TETRA-S2 is the successor to the PRO-ISO-PHY-TETRA-2.

DESCRIPTION

- The PRO-ISO-PHY-TETRA-S2 has improved isolation between the ports - more than 62 dB - and lower insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Also available in tray for 19" rack mounting.
- Vibration and shock tested in accordance with EN-60068**.

**Tested in accordance with:

Random test: EN 60068-2-64, test specification: EN 300 019-2-5 V3.0.0.

Shock test: EN 60068-2-27, test specification: EN 300 019-2-5 V3.0.0.

Bump test: EN 60068-2-29, test specification: EN 300 019-2-5 V3.0.0.

ORDERING DESIGNATIONS


| TYPE | TX MHz | RX MHz | PRODUCT NO. |
|--|-----------|-----------|-------------|
| PRO-ISO-PHY-385/390-S2-N(f) | 380 - 385 | 390 - 395 | 210002227 |
| PRO-ISO-PHY-415/420-S2-N(f) | 410 - 415 | 420 - 425 | 210002242 |
| ACCESSORIES | | | |
| 19" Front plate with connectors in front | | | 210002247 |
| 19" Front plate with connectors in back | | | 210002248 |

SPECIFICATIONS


| ELECTRICAL | |
|---------------------------|--|
| MODEL | PRO-ISO-PHY-TETRA-S2 |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 380 - 385 MHz RX: 390 - 395 MHz or TX: 410 - 415 MHz RX: 420 - 425 MHz |
| INSERTION LOSS TX-ANT. | < 6.0 dB |

| | |
|---------------------------|---|
| INSERTION LOSS RX-ANT. | < 6.0 dB |
| ISOLATION TRX → TRX | TX - TX: > 62 dB RX - RX: > 62 dB TX - RX / RX - TX: > 62 dB |
| SWR | < 1.5 |
| MAX. POWER | 25 W per port |
| GROUP DELAY VARIATION | TX-ANT. < 120 nsec. RX-ANT. < 150 nsec. |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Black |
| DIMENSIONS (L x W x H) | 150 (excl. conn.) x 150 x 35 mm / 5.91 (excl. conn.) x 5.91 x 1.38 in. |
| WEIGHT | Approx. 1820 g / 4.01 lb. |
| ENVIRONMENTAL | |
| IP-GRADE | IP-62 |



TYPICAL ATTENUATION VALUES

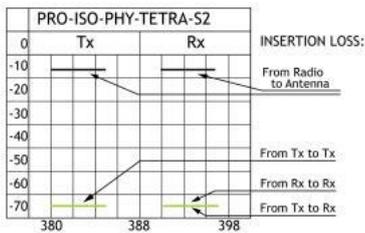

CONNECTION DIAGRAM

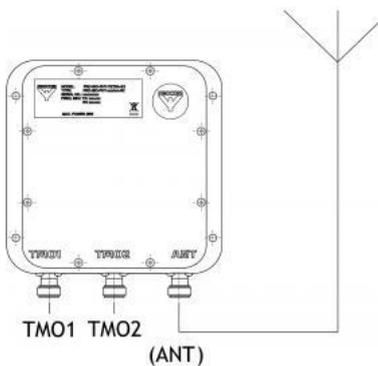

MOUNTING DETAILS

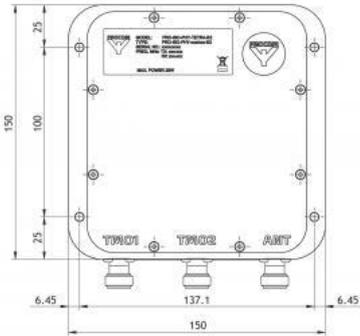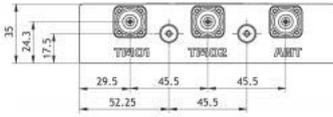

19" Front plate with connectors in front (210002247)



19" Front plate with connectors in back (210002248)





PRO-ISO-PHY-TETRA-S3

Three-TETRA-Station Combiner

- The PRO-ISO-PHY-TETRA-S3 combiner provides the possibility of connecting up to three TETRA radios into one common antenna.
- The PRO-ISO-PHY-TETRA-S3 models are available in the frequency range 380 - 470 MHz (on request).
- ETSI compliant connection of three digital radios.
- The PRO-ISO-PHY-TETRA-S3 is the successor to the PRO-ISO-PHY-TETRA-3.

DESCRIPTION

- The PRO-ISO-PHY-TETRA-S3 has improved isolation between the ports - more than 62 dB - and lower insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Also available in tray for 19" rack mounting.
- Vibration and shock tested in accordance with EN-60068**.

**Tested in accordance with:

Random test: EN 60068-2-64, test specification: EN 300 019-2-5 V3.0.0.

Shock test: EN 60068-2-27, test specification: EN 300 019-2-5 V3.0.0.

Bump test: EN 60068-2-29, test specification: EN 300 019-2-5 V3.0.0.

ORDERING DESIGNATIONS


| TYPE | TX MHz | RX MHz | PRODUCT NO. |
|--|-----------|-----------|-------------|
| PRO-ISO-PHY-385/390-S3-N(f) | 380 - 385 | 390 - 395 | 210002228 |
| PRO-ISO-PHY-415/420-S3-N(f) | 410 - 415 | 420 - 425 | 210002252 |
| ACCESSORIES | | | |
| 19" Front plate with connectors in front | | | 210002302 |
| 19" Front plate with connectors in back | | | 210002205 |

SPECIFICATIONS


| ELECTRICAL | |
|---------------------------|--|
| MODEL | PRO-ISO-PHY-TETRA-S3 |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 380 - 385 MHz RX: 390 - 395 MHz or TX: 410 - 415 MHz RX: 420 - 425 MHz |
| INSERTION LOSS TX-ANT. | < 9.0 dB |

| | |
|---------------------------|---|
| INSERTION LOSS RX-ANT. | < 9.0 dB |
| ISOLATION TRX → TRX | TX - TX: > 62 dB RX - RX: > 62 dB TX - RX / RX - TX: > 62 dB |
| SWR | < 1.5 |
| MAX. POWER | 25 W per port |
| GROUP DELAY VARIATION | TX-ANT. < 120 nsec. RX-ANT. < 150 nsec. |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Black |
| DIMENSIONS (L x W x H) | 150 (excl. conn.) x 250 x 35 mm / 5.91 (excl. conn.) x 9.84 x 1.38 in. |
| WEIGHT | Approx. 2400 g / 5,29 lb. |
| ENVIRONMENTAL | |
| IP-GRADE | IP-62 |


TYPICAL ATTENUATION VALUES

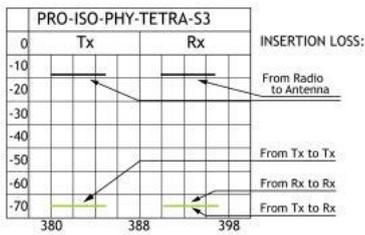

CONNECTION DIAGRAM

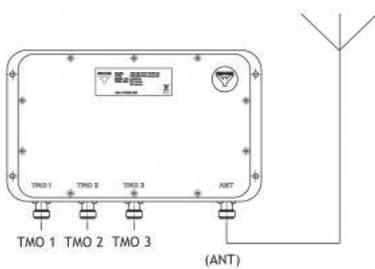

MOUNTING DETAILS

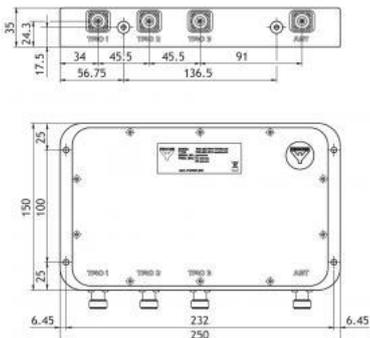

19" Front plate with connectors in front (210002302)



19" Front plate with connectors in back (210002205)





PRO-ISO-PHY-TETRA-S4

Four-TETRA-Station Combiner

- The PRO-ISO-PHY-TETRA-S4 combiner provides the possibility of connecting up to four TETRA radios into one common antenna.
- The PRO-ISO-PHY-TETRA-S4 models are available in the frequency range 380 - 470 MHz (on request).

DESCRIPTION

- ETSI compliant connection of four digital radios.
- The PRO-ISO-PHY-TETRA-S4 is the successor to the PRO-ISO-PHY-TETRA-4.
- The PRO-ISO-PHY-TETRA-S4 has improved isolation between the ports - more than 62 dB - and lower insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Also available in tray for 19" rack mounting.
- Vibration and shock tested in accordance with EN-60068**.

**Tested in accordance with:

Random test: EN 60068-2-64, test specification: EN 300 019-2-5 V3.0.0.

Shock test: EN 60068-2-27, test specification: EN 300 019-2-5 V3.0.0.

Bump test: EN 60068-2-29, test specification: EN 300 019-2-5 V3.0.0.

ORDERING DESIGNATIONS


| TYPE | TX MHz | RX MHz | PRODUCT NO. |
|--|-----------|-----------|-------------|
| PRO-ISO-PHY-385/390-S4 | 380 - 385 | 390 - 395 | 210002202 |
| PRO-ISO-PHY-415/420-S4 | 410 - 415 | 420 - 425 | 210002203 |
| ACCESSORIES | | | |
| 19" Front plate with connectors in front | | | 210002204 |
| 19" Front plate with connectors in back | | | 210002205 |

SPECIFICATIONS


| ELECTRICAL | |
|---------------------------|--|
| MODEL | PRO-ISO-PHY-TETRA-S4 |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 380 - 385 MHz RX: 390 - 395 MHz or TX: 410 - 415 MHz RX: 420 - 425 MHz |
| INSERTION LOSS TX-ANT. | < 9.0 dB |
| INSERTION LOSS | < 9.0 dB |

| | |
|------------------------|--|
| RX-ANT. | |
| ISOLATION TRX → TRX | TX - TX: > 62 dB RX - RX: > 62 dB TX - RX / RX - TX: > 62 dB |
| SWR | < 1.5 |
| MAX. POWER | 25 W per port |
| GROUP DELAY VARIATION | TX-ANT. < 120 nsec. RX-ANT. < 150 nsec. |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Black |
| DIMENSIONS (L x W x H) | 150 (excl. conn.) x 250 x 35 mm / 5.91 (excl. conn.) x 9.84 x 1.8 in. |
| WEIGHT | Approx. 2400 g / 5,29 lb. |
| ENVIRONMENTAL | |
| IP-GRADE | IP-62 |


TYPICAL ATTENUATION VALUES

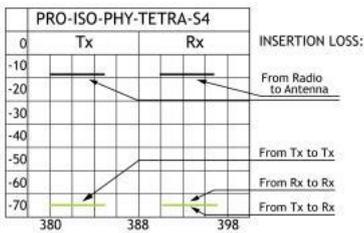

CONNECTION DIAGRAM

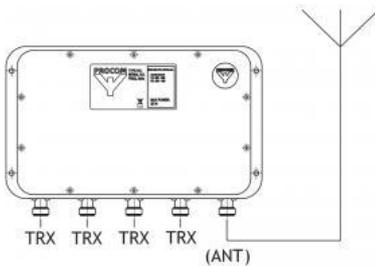

MOUNTING DETAILS

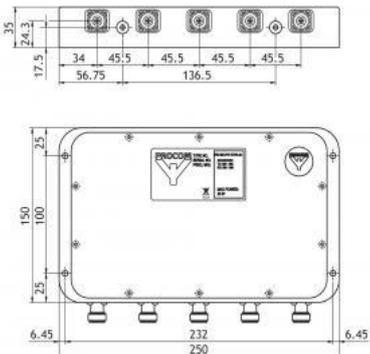



19" Front plate with connectors in front (210002204)



19" Front plate with connectors in back (210002205)



PRO-PHY 450-6SI-100

6-Channel Hybrid Combiner for 100 W

- The PRO-PHY series of hybrid combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All hybrid combiners are suitable for 19" rack mounting.

- Single isolator fitted as standard.
- Maximum input power of 100 W.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---------------------|-------------|
| PRO-PHY 450-6SI-100 | 210001279 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|---|
| MODEL | PRO-PHY 450-6SI-100 |
| TX FREQUENCY | 380 - 470 MHz |
| MAX. INPUT POWER | 100 W |
| TX-TX SPACING, Δ TX | < 11 MHz |
| TYP. INSERTION LOSS | 8.6 dB |
| TX-TX ISOLATION | > 70 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female |
| DIMENSIONS (H x W x L) | 6HU x 483 x 500 mm (267 x 483 x 500 mm) |
| WEIGHT | Approx. 22 kg |



PRO-DMO/TMO-4

Preliminary data sheet, customized

- The PRO-DMO/TMO-4 is an upgrade kit for the PRO-ISO-PHY-TETRA-4, which gives the possibility to connect four DMO/TMO radios.
- Easy setup.
- Jumper cables included.


DESCRIPTION

- Possibility to mount on top of PRO-ISO-PHY-TETRA-4 unit (same footprint) or mount the unit in front/back of the PRO-ISO-PHY-TETRA-4 unit.
- Also available in 19" rack-mountable version from factory or later for upgrade.
- The use of high-quality system components such as highly selective helical duplex filters provides high isolation between DMO and TMO mode.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------------|--------------------------|
| PRO-DMO/TMO-4 | Contact for availability |
| PRO-DMO/TMO-4-TR-F | Contact for availability |
| PRO-DMO/TMO-4-TR-B | Contact for availability |

PRO-DMO/TMO-4-TR-F

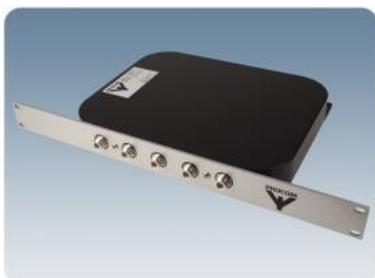

* Compatible DMO-modes

The PRO-ISO-PHY-TETRA-ELW is compatible with the following DMO modes in 406 - 410 MHz band:

- DM-MS
- DM-REP (1A)

SPECIFICATIONS

| ELECTRICAL | |
|---------------|----------------|
| MODEL | PRO-DMO/TMO-4 |
| TYPE | TETRA combiner |
| TMO FREQUENCY | 380 - 395 MHz |

| | |
|---|--|
| DMO FREQUENCY * | 406 - 410 MHz |
| INSERTION LOSS TMO | < 4.3 dB |
| INSERTION LOSS DMO-ANT | < 11 dB |
| ISOLATION DMO-TMO | > 60 dB |
| ISOLATION DMO-DMO | > 20 dB (typ. > 30 dB @ SWR 1.5) |
| MAX. POWER PR. CHANNEL | ≤ 25 W |
| MAX. RETURN POWER IN ADJACENT CHANNELS | < 250 mW |
| SWR | < 1.5 |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Black |
| DIMENSIONS (L x W x H) | 300 (excl. conn.) x 240 x 40 mm / 11.81 (excl. conn.) x 9.45 x 1.57 in. |
| WEIGHT | Approx. 3100 g / 6.83 lb. |
| ENVIRONMENTAL | |
| IP-GRADE | IP-62 |

PRO-DMO/TMO-4 mounted on top of a PRO-ISO-PHY-TETRA-4-N(f)



PRO-DMO/TMO-4-TR-F mounted on top of a PRO-ISO-PHY-TETRA-4-TR-F-N(f)





PRO-PHY350-2

2-Channel Hybrid Ring Combiner for 350 MHz Transmitters

- Combining two transmitters or receivers on the same antenna.
- Better utilization of good antenna position.
- Two antennas on the same transmitter or receiver.

- Combining two signal generators.
- The only combining option with very small TX-TX frequency spacing.
- 60 W load supplied (other loads or no load as option).

ORDERING DESIGNATIONS

| TYPE | FREQ. RANGE | PRODUCT NO. |
|--------------|---------------|-------------|
| PRO-PHY350-2 | 330 - 360 MHz | 210000696 |

SPECIFICATIONS


| ELECTRICAL | |
|------------------------------------|--|
| FILTER TYPE | Hybrid Ring Junction |
| FREQUENCY | 330 - 360 MHz |
| MAX. INPUT POWER | 50 W per channel (max. 150 W with larger load) |
| INSERTION LOSS | < 3.4 dB @ 10 MHz BW < 3.7 dB @ 20 MHz BW |
| ISOLATION TX 1-TX 2 (*see note) | > 35 dB @ 10 MHz BW > 30 dB @ 20 MHz BW |
| IMPEDANCE | Nom. 50 Ω |
| LOAD (**see note) | 30 W load fitted (other ratings available) |
| SWR | < 1.5 with all other ports terminated with 50 Ω |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| CONNECTORS | N-female (other types as option) |
| DIMENSIONS (L x W x H) | 216 x 89 (incl. conn.) x 42 mm (excl. load) |
| WEIGHT | Approx. 700 g (excl. load) |

*The isolation between the TX ports is directly dependent on the terminating SWR on the antenna port. With an antenna load SWR = 1.5, the isolation between the two TX ports will be reduced to 20 dB @ 5 MHz bandwidth.

**The SWR of the loads should be < 1.1! The load should be able to dissipate 1/2 of the total input power.

E.g.: With 50 W input in total for the two channels, the load should be able to dissipate $50 \text{ W} \times 1/2 = 25 \text{ W}$.

RESPONSE CURVE

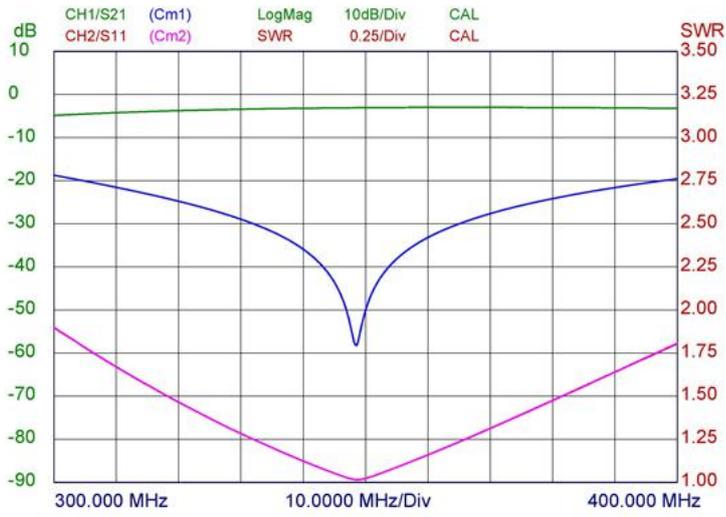



PRO-ISO-PHY-TETRA-S6

Six-TETRA-Station Combiner

- The PRO-ISO-PHY-TETRA-S6 combiner provides the possibility of connecting up to six TETRA radios into one common antenna.
- ETSI compliant connection of six digital radios.

DESCRIPTION

- The PRO-ISO-PHY-TETRA-S6 has high isolation between the ports - more than 62 dB - and low insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Delivered in tray for 19" rack mounting (Unassembled).
- Jumper cables included.

ORDERING DESIGNATIONS

| TYPE | TX MHZ | RX MHZ | PRODUCT NO. |
|----------------------------------|-----------|-----------|-------------|
| PRO-ISO-PHY-385/390-S6-TR-B-N(f) | 380 - 385 | 390 - 395 | 210002299 |
| PRO-ISO-PHY-385/390-S6-TR-F-N(f) | 380 - 385 | 390 - 395 | 210002356 |
| PRO-ISO-PHY-415/420-S6-TR-B-N(f) | 410 - 415 | 420 - 425 | 210002357 |
| PRO-ISO-PHY-415/420-S6-TR-F-N(f) | 410 - 415 | 420 - 425 | 210002358 |

SPECIFICATIONS

| ELECTRICAL | |
|---------------------------|--|
| MODEL | PRO-ISO-PHY-TETRA-S6 |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 380 - 385 MHz RX: 390 - 395 MHz or TX: 410 - 415 MHz RX: 420 - 425 MHz |
| INSERTION LOSS TX-ANT. | < 13 dB |
| INSERTION LOSS RX-ANT. | < 13 dB |
| ISOLATION TRX → TRX | TX - TX: > 62 dB RX - RX: > 62 dB TX - RX / RX - TX: > 62 dB |

| | |
|------------------------|---|
| SWR | < 1.5 |
| MAX. POWER | 25 W/station |
| GROUP DELAY VARIATION | TX-ANT. < 120 nsec. RX-ANT. < 150 nsec. |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Combiner: Black Frontplate: Aluminium |
| DIMENSIONS (W x H x D) | 19" x 2 HU x 154 mm (excl. conn.) (483 x 88 x 154 mm) / (7.02 x 3.46 x 6.06 in.) |
| WEIGHT | Approx. 5.3 kg / 11.68 lb. |
| ENVIRONMENTAL | |
| IP-GRADE | IP-62 |


Option TR-F



Option TR-B



CONNECTION DIAGRAM

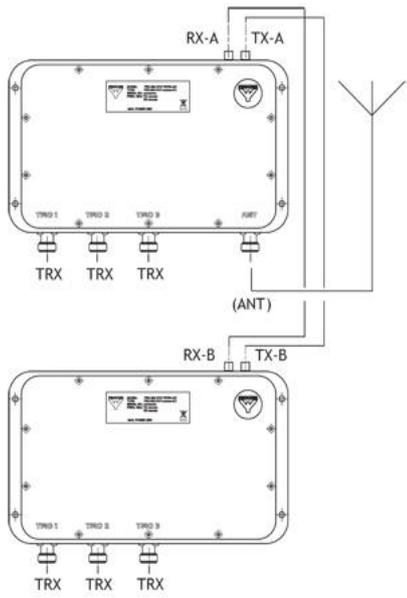



PRO-ISO-PHY-TETRA-S8

Eight-TETRA-Station Combiner

- The PRO-ISO-PHY-TETRA-S8 combiner provides the possibility of connecting up to eight TETRA radios into one common antenna.
- ETSI compliant connection of eight digital radios.

DESCRIPTION

- The PRO-ISO-PHY-TETRA-S8 has high isolation between the ports - more than 62 dB - and low insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Delivered in tray for 19" rack mounting (Unassembled).
- Vibration and shock tested in accordance with EN-60068 **.
- Jumper cables included.

** Tested in accordance with:

Random test: EN 60068-2-64, test specification: EN 300 019-2-5 V3.0.0.

Shock test: EN 60068-2-27, test specification: EN 300 019-2-5 V3.0.0.

Bump test: EN 60068-2-29, test specification: EN 300 019-2-5 V3.0.0.

ORDERING DESIGNATIONS

| TYPE | TX MHZ | RX MHZ | PRODUCT NO. |
|----------------------------------|-----------|-----------|-------------|
| PRO-ISO-PHY-385/390-S8-TR-B-N(f) | 380 - 385 | 390 - 395 | 210002359 |
| PRO-ISO-PHY-385/390-S8-TR-F-N(f) | 380 - 385 | 390 - 395 | 210002360 |
| PRO-ISO-PHY-415/420-S8-TR-B-N(f) | 410 - 415 | 420 - 425 | 210002361 |
| PRO-ISO-PHY-415/420-S8-TR-F-N(f) | 410 - 415 | 420 - 425 | 210002362 |

SPECIFICATIONS

| ELECTRICAL | |
|---------------------------|--|
| MODEL | PRO-ISO-PHY-TETRA-S8 |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 380 - 385 MHz RX: 390 - 395 MHz or TX: 410 - 415 MHz RX: 420 - 425 MHz |
| INSERTION LOSS TX-ANT. | < 13 dB |
| INSERTION LOSS RX-ANT. | < 13 dB |

| | |
|------------------------|---|
| ISOLATION TRX → TRX | TX - TX: > 62 dB RX - RX: > 62 dB TX - RX / RX - TX: > 62 dB |
| SWR | < 1.5 |
| MAX. POWER | 25 W / station |
| GROUP DELAY VARIATION | TX-ANT. < 120 nsec. RX-ANT. < 150 nsec. |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Combiner: Black Frontplate: Aluminium |
| DIMENSIONS (W x H x D) | 19" x 2 HU x 154 mm (excl. conn.) (483 x 88 x 154 mm) / (7.02 x 3.46 x 6.06 in.) |
| WEIGHT | Approx. 5.3 kg / 11.68 lb. |
| ENVIRONMENTAL | |
| IP-GRADE | IP-62 |


Option TR-F




Option TR-B



TYPICAL ATTENUATION VALUES

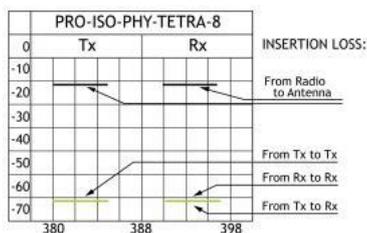

CONNECTION DIAGRAM

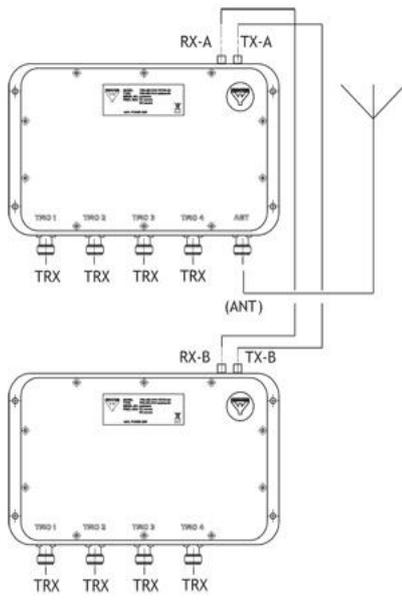



PRO-CAV130-2

2-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX and RX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV130-2 | 210001459 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-CAV130-2 |
| TX FREQUENCY | 116 - 146 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 2.2 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 11 HU x 600 (483 x 489 x 765 mm) |
| WEIGHT | 16.55 kg |



PRO-CAV130-3

3-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV130-3 | 210001412 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-CAV130-3 |
| TX FREQUENCY | 116 - 146 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 2.7 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (L x W x H) | 19" x 15 HU x 765 (483 x 667 x 765 mm) |
| WEIGHT | 25 kg |



PRO-CAV130-4

4-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV130-4 | 210001150 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|---|
| MODEL | PRO-CAV130-4 |
| TX FREQUENCY | 116 - 146 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 3.2 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 19 HU x 765 (483 x 845 x 765 mm) |
| WEIGHT | 33 kg |





PRO-CAV130-5

5-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV130-5 | 210002317 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|--|
| MODEL | PRO-CAV130-5 |
| TX FREQUENCY | 116 - 146 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 3.4 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 26 HU x 765 (483 x 1156 x 765 mm) |



| | |
|--------|----------|
| WEIGHT | 42,85 kg |
|--------|----------|



PRO-CAV130-6

6-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV130-6 | 210002318 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|--|
| MODEL | PRO-CAV130-6 |
| TX FREQUENCY | 116 - 146 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 3.5 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 30 HU x 765 (483 x 1333 x 765 mm) |



| | |
|--------|-------|
| WEIGHT | 51 kg |
|--------|-------|



PRO-CAV130-7

7-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

DESCRIPTION

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV130-7 | 210002319 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|----------------------------------|
| MODEL | PRO-CAV130-7 |
| TX FREQUENCY | 116 - 146 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 3.6 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 34 HU x 765 |



| | |
|--------|-----------------------|
| | (483 x 1511 x 765 mm) |
| WEIGHT | 59.2 kg |



PRO-CAV150-8

8-Channel Cavity Combiner

- The PRO-CAV series of cavity combiners has been designed to help identify the optimum solution for combining several transmitters into one antenna.
- All cavity combiners are suitable for 19" rack mounting.

- All cavities are 250 mm dia. Dual isolators fitted as standard.
- A range of racks and cabinets are available.
- Please specify the frequencies for TX when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|--------------|-------------|
| PRO-CAV150-8 | 210001013 |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------------|--|
| MODEL | PRO-CAV150-8 |
| TX FREQUENCY | 136 - 175 MHz |
| MAX. INPUT POWER | 150 W |
| TX-TX SPACING, Δ_{TX} | > 75 kHz |
| TYP. INSERTION LOSS | 3.7 dB @ $\Delta_{TX} = 150$ kHz |
| TX-TX ISOLATION | > 75 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| MECHANICAL | |
| TEMP. RANGE | -30° C → +60° C |
| FREQ. STABILITY | Approx. 0.8 ppm/° C |
| CONNECTORS | N-female |
| DIMENSIONS (W x H x D) | 19" x 38 HU x 600 (483 x 1689 x 600 mm) |
| WEIGHT | Approx. 51.2 kg |



PRO-COM150-HDAR-2/...

2-Channel 19

- An integrated single tray combining solution housing a 2-channel hybrid TX hybrid combiner, duplex filter, active RX multicouplers and preselector.
- Minimal rack space required - only 3 HU.

DESCRIPTION

- Compatible with digital 6.25 kHz channel spacing.
- Single TX isolators fitted as standard (dual isolators available as option).
- 2 RX ports as standard (4 ports available as option).
- Please specify TX / RX frequencies when ordering.

ORDERING DESIGNATIONS

| TYPE | PRODUCT NO. |
|---|-------------|
| PRO-COM150-HDAR-2/l | 210001737 |
| PRO-COM150-HDAR-2/h | 210001736 |
| PRO-COM150-BHDAR-2/l (With black frontplate) | 210002338 |
| PRO-COM150-BHDAR-2/h (With black frontplate) | 210002339 |
| ACCESSORIES | |
| ADAPTOR AC/DC 12V EU | 240000040 |
| ADAPTOR AC/DC 12V UK | 240000041 |

SPECIFICATIONS

| ELECTRICAL | |
|--------------------------|--------------------------------------|
| MODEL | PRO-COM150-HDAR-2/... |
| FREQUENCY RANGE | l: 136 - 156 MHz h: 152 - 175 MHz |
| MAX. INPUT POWER PER CH | 35 W |
| MAX. TX-TX SPACING, Δ TX | 1.5 MHz |
| MIN. TX-RX SPACING | 4 MHz |
| INSERTION LOSS - TX PATH | < 5.0 dB |
| TX-TX ISOLATION | > 70 dB |
| ANT-TX ISOLATION | > 40 dB @ 25° C |

| | |
|---|---|
| RX ISOLATION IN TX BAND TX-TX spacing < 0.5 MHz TX-TX spacing > 0.5 MHz | > 80 dB > 60 dB |
| TX ISOLATION IN RX BAND RX-RX spacing < 0.5 MHz RX-RX spacing > 0.5 MHz | > 80 dB > 60 dB |
| RX-RX ISOLATION | > 20 dB |
| IMPEDANCE | Nom. 50 Ω |
| SWR | ≤ 1.5 |
| LNA NOISE FIGURE | < 3.5 dB |
| GAIN - RX PATH | 1 dB +/- 1 dB (factory set) |
| CURRENT CONSUMPTION | 500 mA @ 12 VDC |
| MECHANICAL | |
| TEMP. RANGE | -30° C \rightarrow +60° C |
| CONNECTORS | N-female |
| DIMENSIONS | 19" x 3 HU x 400 mm (483 x 133 x 400 mm) |
| WEIGHT | Approx. 6.3 kg |

ADAPTOR AC/DC 12V EU



ADAPTOR AC/DC 12V UK





PRO-ISO-PHY-435/440-S8

Eight-TETRA-Station Combiner

Customized

- The PRO-ISO-PHY-435/440-S8 combiner provides the possibility of connecting up to eight TETRA radios into one common antenna.
- ETSI compliant connection of eight digital radios.

DESCRIPTION

- The PRO-ISO-PHY-435/440-S8 has high isolation between the ports - more than 62 dB - and low insertion loss.
- The use of high-quality system components such as highly selective helical duplex filters and high-performance isolators provides high isolation and secure communication.
- The smallest and most compact design on the market.
- Suitable for both stationary and mobile use.
- Delivered in tray for 19" rack mounting (Unassembled).
- Vibration and shock tested in accordance with EN-60068 **.
- Jumper cables included.

** Tested in accordance with:

Random test: EN 60068-2-64, test specification: EN 300 019-2-5 V3.0.0.

Shock test: EN 60068-2-27, test specification: EN 300 019-2-5 V3.0.0.

Bump test: EN 60068-2-29, test specification: EN 300 019-2-5 V3.0.0.

ORDERING DESIGNATIONS

| TYPE | TX MHZ | RX MHZ | PRODUCT NO. |
|----------------------------------|-----------|-----------|--------------------------|
| PRO-ISO-PHY-435/440-S8-TR-B-N(f) | 430 - 435 | 440 - 445 | Contact for availability |
| PRO-ISO-PHY-435/440-S8-TR-F-N(f) | 430 - 435 | 440 - 445 | Contact for availability |

SPECIFICATIONS

| ELECTRICAL | |
|------------------------|---|
| MODEL | PRO-ISO-PHY-435/440-S8 |
| TYPE | TETRA combiner |
| TX/RX FREQUENCY | TX: 430 - 435 MHz TX: 430 - 435 MHz RX: 440 - 445 MHz |
| INSERTION LOSS TX-ANT. | < 13 dB |
| INSERTION LOSS RX-ANT. | < 13 dB |
| ISOLATION TRX → TRX | TX - TX: > 62 dB RX - RX: > 62 dB RX - TX: > 62 dB |
| SWR | < 1.5 |

| | |
|---------------------------|---|
| MAX. POWER | 25 W / station |
| GROUP DELAY VARIATION | TX-ANT. < 120 nsec. RX-ANT. < 150 nsec. |
| MECHANICAL | |
| CONNECTOR TYPE | N-female |
| COLOUR | Combiner: BlackFrontplate: Aluminium |
| DIMENSIONS (W x H x D) | 19" x 2 HU x 154 mm (excl. conn.) (483 x 88 x 154 mm) / (7.02 x 3.46 x 6.06 in.) |
| WEIGHT | Approx. 5.3 kg / 11.68 lb. |
| ENVIRONMENTAL | |
| IP-GRADE | IP62 |


Option TR-F



Option TR-B



CONNECTION DIAGRAM

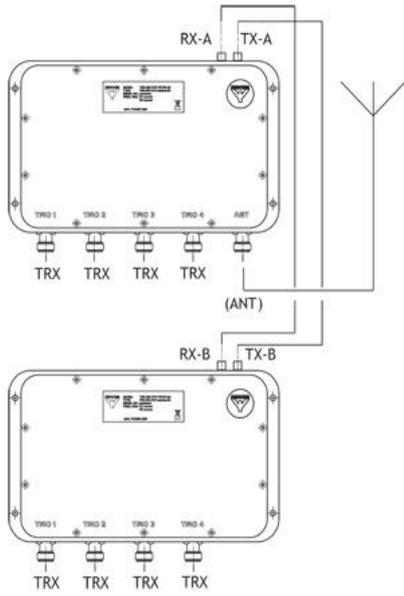

PROCOM A/S

Smedetoften 12, 3600
Frederikssund, Denmark



PROCOM - Making the world smaller

PROCOM A/S
Smedetoften 12
3600 Frederikssund
Denmark