

3 dB Gain 5% λ Mobile Antenna for the TETRA Band

DESCRIPTION

- Black-chromed stainless steel whip with toggle joint.
- Factory tuned for the range 380 - 410 MHz.
- Stainless steel BZ-mount with ball-joint and wing screw whip-fastening system.
- Simple mounting exclusively with access from the outside. Models with roof thickness from 2 mm to 7.5 mm mounting from the inside.
- Choice between two connection principles:
 - BZ-mount: FME-connection (supplied without cable).
 - BZP4-mount: Permanently attached 4 m cable terminated with FME-connector.



SPECIFICATIONS


Electrical	
Model	MU 3-BZ/TETRA/I
Frequency	380 - 410 MHz
Antenna Type	Mobile whip antenna
Max. Input Power	100 W
Polarisation	Vertical
Impedance	50 Ω
VSWR	≤ 1.5 @ f. res.
Bandwidth	≥ 10 @ VSWR ≤ 2.0 ≥ 30 @ VSWR ≤ 3.0
Gain (EIA RS-329-1)	3 dB

Mechanical	
Materials	Whip: Stainless steel, black-chromed Black-chromed brass Mount: Black-chromed brass Weather- and shockproof plastics Stainless steel
Installation Torque	7.5 ±1 Nm
Colour	Black
Height	Approx. 490 mm / 19.29 in.
Weight	BZ-version : Approx. 140 g / 0.31 lb. BZP4-version : Approx. 280 g / 0.62
Mounting	21mm dia. hole (For roof thicknesses 2 mm up to 7.5 mm mounting hole should be 22mm dia.)
Mounting Plate Thickness	Max. 2.0 mm (Models up to 7.5 mm on request)

ORDERING

Model	Product No.	Description
MU 3-BZ/TETRA/I	130001374	BZ-mount with FME-system
MU 3-BZP4/TETRA/I	130001389	BZP4-mount with 4 m cable and FME-connector

TYPICAL VSWR CURVE

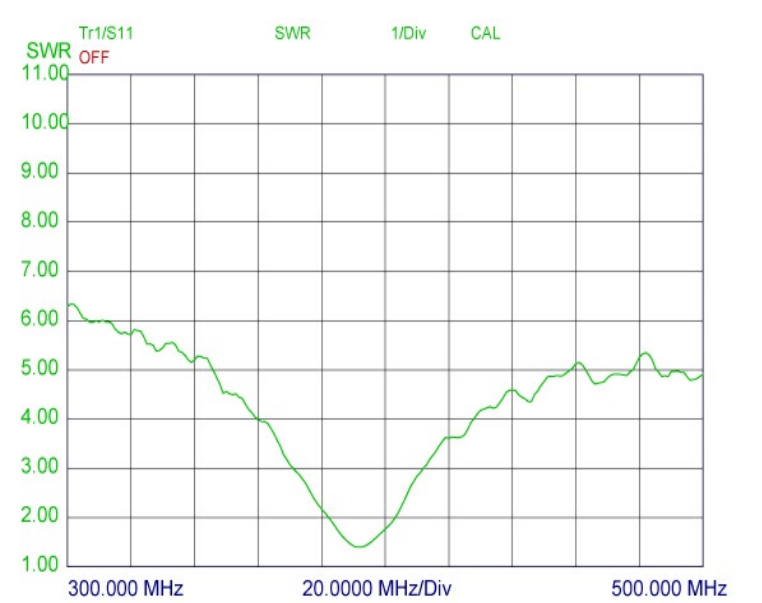


THE WHIP IS COMPATIBLE WITH ALL BELOW MOUNTS


BZ-Mount



BZP4-Mount

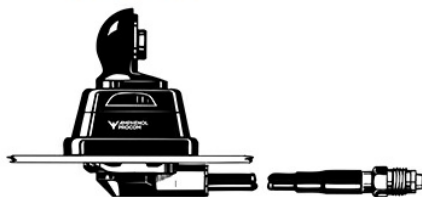

Hat screw option:



For antenna delivered with hat screw instead of wing screw add a K to the antenna designation.


INSTALLATION

This antenna is provided with type BZ-mount. The whip is fastened to the mount by means of our standard ball-joint and wing screw system. The adjustable ball-joint ensures that the whip can always be mounted in a vertical position independent of the angle of the installation spot.

The BZ-mount is particularly well suited for mounting on car-roofs because of its ability to be installed exclusively with access from the outside. The BZ-Mount for roof thickness from 2 mm to 7.5 mm must be mounted from the inside.

However, the antenna can be installed anywhere on the car, as the BZ-mount is equally well suited for mounting on e.g. trunk or wing.


2. INSTALLATION STEPS

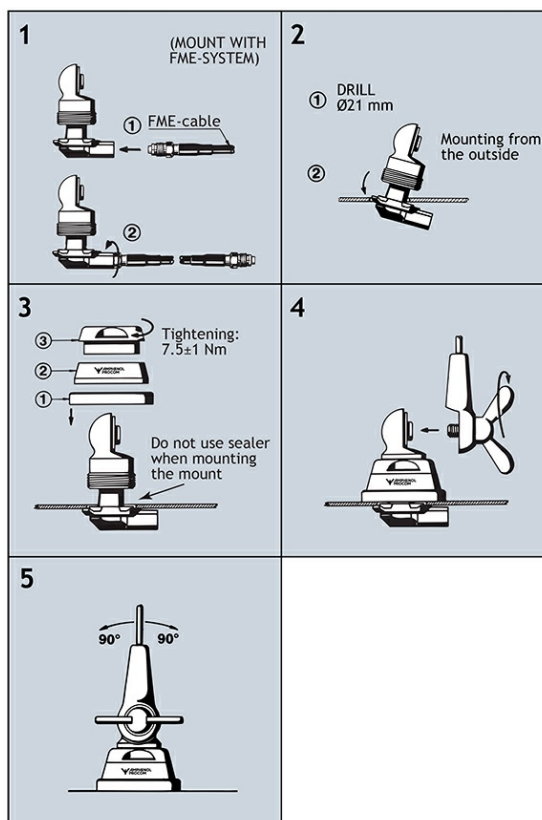

Do not use sealer on rubber gasket or other places.


1. INSTALLATION DIMENSION

BZ-MOUNT



Build- in depth: 10.5 mm
Mounting from the outside

BZ-MOUNT



Build- in depth: 10.5 mm
Mounting from the inside