
PRODUCT DATA SHEET

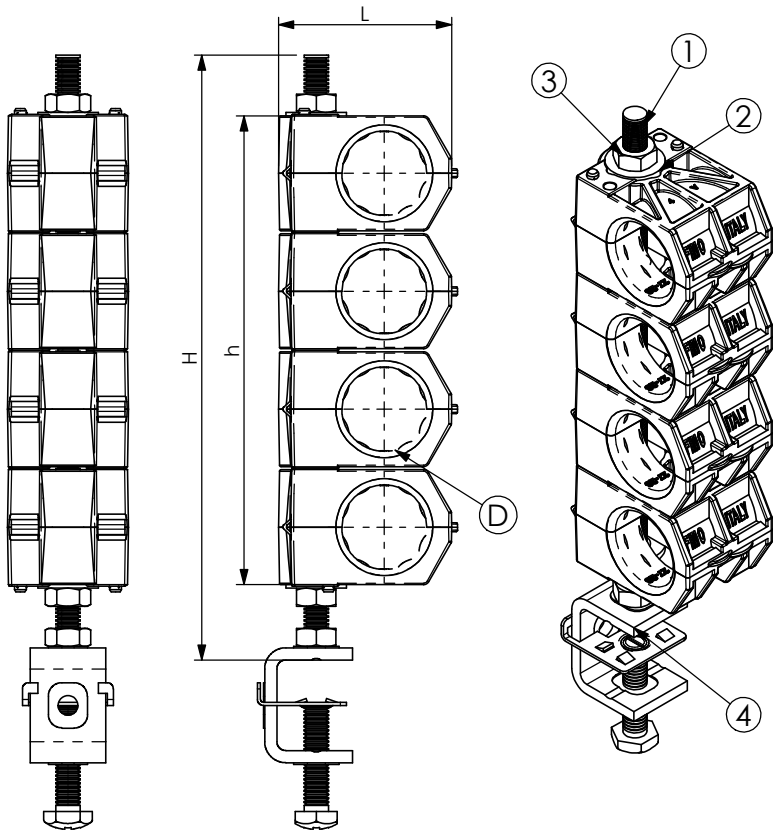

A) SPECIFICATIONS
1 *Stainless steel threaded bar BFI M8*
2 *Stainless steel flat Washer RPI 8/16*
3 *Stainless steel hexagonal nut DAI 8*
4 *Stainless steel MIM 8 clamp*
5 *SAM Single saddle P.P. U.V. resistant*

B) RESISTANCE TESTS
UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -50°C +80°C

C) PACKAGING INFORMATION
Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS
On request

CODE	ARTICLE	ø D	L	h	H	WEIGHT
61 1572 0411	USC/ 4x11	10 - 11	44	125	84	150
61 1572 0414	USC/ 4x1/2"S (14)	13 - 14	50	150	108	167
61 1572 0412	USC/ 4x1/2" (17)	16 - 17	50	150	108	167
61 1572 0478	USC/ 4x7/8" (28)	27 - 28	59	200	152	240
61 1572 4114	USC/ 4x1.1/4" (40)	39 - 40	70	300	216	280
61 1572 4158	USC/ 4x1.5/8" (52)	50 - 52	80	400	264	325

RI	DATE	DR	DATE	AP
02				
01				
00	06/10/15	G.S.	06/10/15	A.V.
	1ST EMISSION			


Description:

Cable Clamps type USO +MIM 8/25

FIMO® Setting Installation Standards

RoHS compliant. RoHS 2002/95/EC

Use: *Fixing of 2 cables on flat 3-25 and round ø 8-25.*



FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.