
PRODUCT DATA SHEET

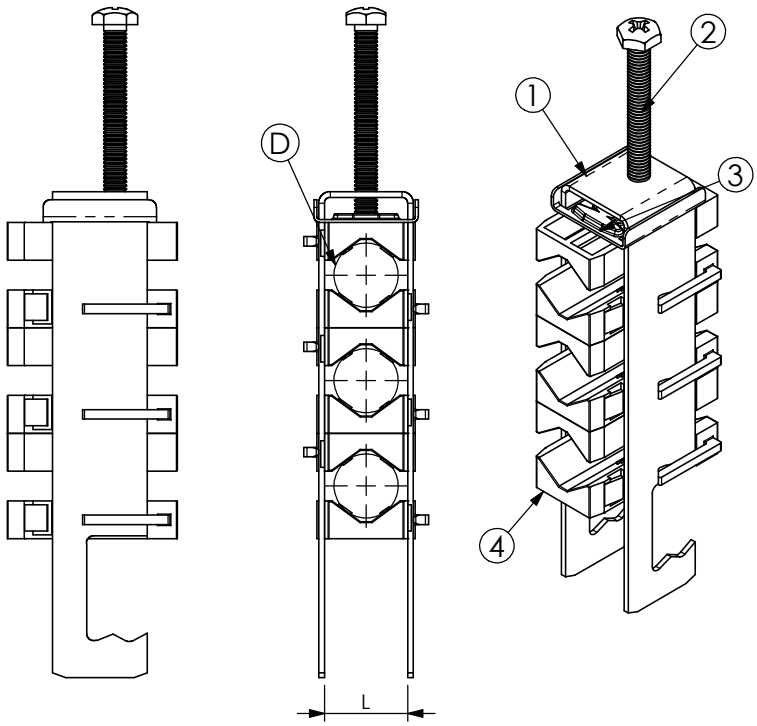

A) SPECIFICATIONS

1 *Stainless steel bow*
Hooking on ∅ 8-25 round and 3-25mm flat
2 *Self-locking pressure screw M6*
3 *Stainless steel sliding pressure plate.*
4 *SEP black P.A. fiberglass saddles*

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST026

CODE	ARTICLE	Nº CABLES	L	ø CABLES	BOX	WEIGHT
60 1516 1099	OX M / 3 x 12	3	12	6 - 12	100	79
60 1516 1110	OX M / 3 x 22	3	22	12 - 17	100	128
60 1516 1111	OX M / 3 x 22	3	22	17 - 22	100	137
60 1516 1112	OX M / 3 x 34	3	34	22 - 26	100	213
60 1516 1113	OX M / 3 x 34	3	34	26 - 34	100	233

RI	DATE	DR	DATE	AP
02				
01				
00	29/01/16	G.S.	29/01/16	A.V.
	1ST EMISSION			

Description:

Stainless cable clamps type OX M
For 3 coaxial cables, complete with 6 saddles.
For articles see schedule.

FIMO® Setting Installation Standards

RoHS

Use:

Fastening of 3 coaxial cables.
Hooking on ∅ 8-25 round and 3-25mm flat

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.