

Waveguide to Coaxial Adapter AWR121M

WR12 to 1mm Male, Round Cover Flange, Right Angle



Rev 1

Electrical

Frequency Range	60.5-91.9 GHz
VSWR	1.4 max

Configuration

Waveguide Size	IEC	740
	EIA	WR12
Flange Type	IEC	/
	North America	M3922/67-003(UG387/U)
Coax Connector	1mm Male	
Body Geometry	Right Angle	


Materials

Waveguide Body	Copper, gold plated
Connector Body	Gold plated beryllium copper
Center Contact	Gold plated beryllium copper

Mechanical & Environmental

Operating Temp	-40℃ to 70℃
Connector Interface	IEC-61169
RoHS	Compliant

Typical Test Data

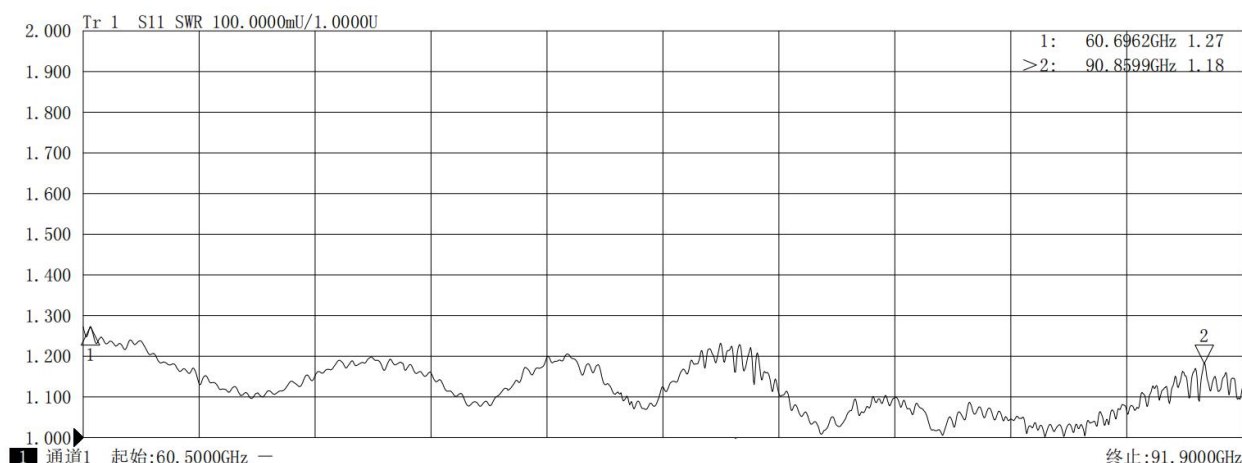

Waveguide to Coaxial Adapter **AWR121M**

WR12 to 1mm Male, Round Cover Flange, Right Angle



Rev 1

Dimensions(mm)

