


## Coaxial PCB Connector 82\_MFBX-50-0-4/111\_N

### Description

Straight PCB jack

Interface Standards  
HUBER+SUHNER MFBX

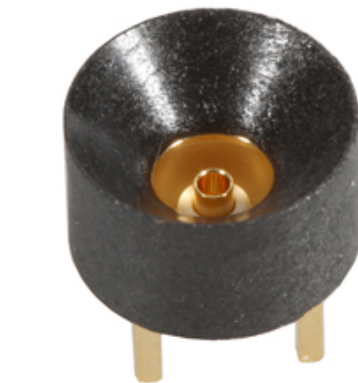

### Technical Data

#### Electrical Data

Impedance 50  $\Omega$   
Interface frequency max. 6 GHz

#### Mechanical Data

Board mounting type through holes  
Weight 0.003255 kg

#### Environmental Data

Operating temperature -55 °C to 155 °C  
2011/65/EU (RoHS - including  
2015/863 and 2017/2102) compliant

#### Material Data

| Piece Parts    | Material                     | Surface Plating |
|----------------|------------------------------|-----------------|
| Centre contact | Brass                        | SUCOPRO Plating |
| Outer contact  | Brass                        | SUCOPRO Plating |
| Body           | PA (Polyamide)               |                 |
| Insulator      | LCP (Liquid crystal polymer) |                 |

### Related Documents

Outline drawing DOU-00246036  
Catalogue drawing DCA-00275274

### Ordering Information

Single package 82\_MFBX-50-0-4/111\_NE

### Remarks

PCB connector with stand-offs