

Band-Pass/Band-Reject Filters for the 450 MHz Band


DESCRIPTION

- The BPBR 70/6... and the BRBP 70/6... are 6-cavity pass-reject filters, which pass one frequency or frequency band and reject another in immediate vicinity of the pass frequency.
- The filters are delivered in two basic models: The BPBR-types have the reject range on the high side of the pass frequency and the BRBP-types have the reject range situated on the low side of the pass frequency.
- These filter types can be used to protect a receiver against interference from a nearby transmitter. The filters are tuned to reject the interfering signal. Pass-reject-type filters are applied when the spacing between the utility signal and the interfering signal is so small, that the slope steepness of normal band-pass filters or notch filters are not sufficient enough to provide adequate rejection.
- The filters are primarily intended to pass and reject two single frequencies, but the filters can also be tuned to pass and reject several single frequencies or to having a certain pass and reject port bandwidth. In these cases, factory-tuning is recommended.
- The BPBR 70/6... and the BRBP 70/6... are both adjustable within the complete 406 - 470 MHz band. Both types can be delivered in four different versions, each dedicated to work with a certain spacing between the pass frequency and the reject frequency. See "Ordering information" below.
- The filters use full-length ¼ cavities in a compact, extruded aluminium housing. The chassis is made of passivated steel, and teflon insulation has been applied in the coaxial cables and in the connectors. The filters are black vinyl coated to prevent corrosion.
- Careful design and choice of materials ensure reliable operation over a wide temperature range.




DIAGRAM

TYPICAL RESPONSE CURVES

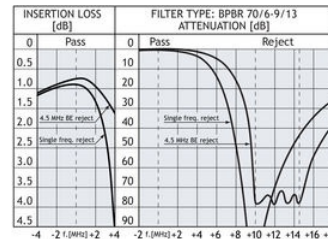

TYPICAL RESPONSE CURVES

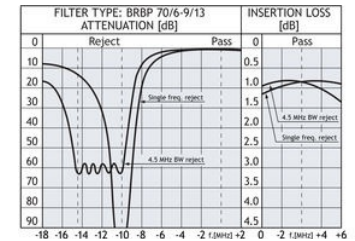

SPECIFICATIONS

Electrical	
Model	BPBR 70/6 / BRBP 70/6
Filter Type	Band-pass / band-reject filter
Frequency	406 - 470 MHz
Max. Input Power	50 W
Impedance	50 Ω
Pass-Reject Spacing	5 - 16 MHz (see table)
VSWR	< 1.5:1
Mechanical	
Connection(s)	BNC(f)
Dimensions	225 x 154 x 33 mm
Weight	0.99 kg / 2.18 lb
Environmental	
Operating Temperature Range	-30°C to +60°C
Frequency Stability	10 ppm/° C (approx.)

ORDERING

Model	Product No.	Description	Frequency
BPBR 70/6-5/7	200001415	BPBR Low Pass High Reject	5 - 7 MHz
BPBR 70/6-7/9	200001410		7 - 9 MHz
BPBR 70/6-9/13	200001413		9 - 13 MHz
BPBR 70/6-13/16	200001402		13 - 16 MHz
BRBP 70/6-5/7	200001539	BRBP Low Reject High Pass	5 - 7 MHz
BRBP 70/6-7/9	200001541		7 - 9 MHz
BRBP 70/6-9/13	200001544		9 - 13 MHz
BRBP 70/6-13/16	200001530		13 - 16 MHz

ADDITIONAL DATA

ORDERING INFORMATION

If pass and reject frequencies are stated when ordering, the filters are delivered factory-adjusted. Ordering example: BRBP 70/6, LOW: 443.7 MHz, HIGH: 450.3 MHz. In this case, further information is not required.

When ordering untuned filters please use the model selection table above to select the appropriate ordering designation for the desired filter type.

Special versions of the filters with spacings down to 3 MHz may be quoted on request.