
PRODUCT DATA SHEET

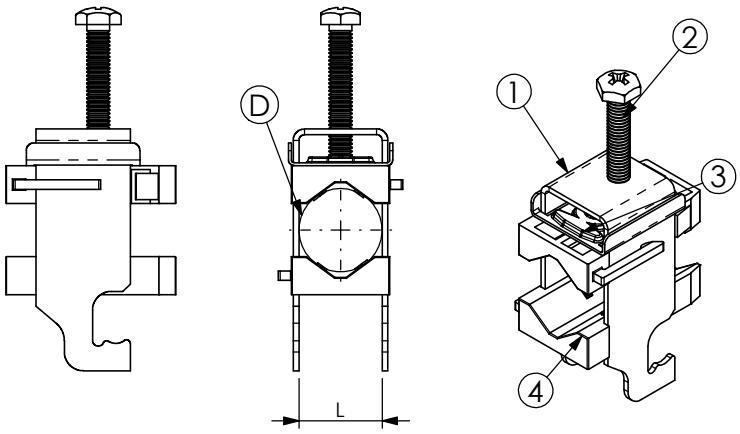

A) SPECIFICATIONS

1 *Stainless steel bow*
Hooking on section 40x22mm, flat and round 3-12
2 *Self-locking pressure screw M6*
3 *Stainless steel sliding pressure plate.*
4 *SEP black P.A. fiberglass saddles*

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST026

CODE	ARTICLE	Nº CABLES	L	ø CABLES	BOX	WEIGHT
60 1518 0801	OX E / 1 x 12	1	12	6 - 12	100	40
60 1518 0803	OX E / 1 x 22	1	22	12 - 22	100	56
60 1518 0805	OX E / 1 x 34	1	34	22 - 34	100	92
60 1518 0807	OX E / 1 x 46	1	46	34 - 46	50	122
60 1518 0809	OX E / 1 x 58	1	58	46 - 58	50	146
60 1518 0811	OX E / 1 x 70	1	70	58 - 70	50	164

RI	DATE	DR	DATE	AP
02				
01				
00	29/01/16	G.S.	29/01/16	A.V.
	1ST EMISSION			

Description:

Stainless cable clamps type OX E
For 1 coaxial cable, complete with 2 saddles.
For articles see schedule.

FIMO® Setting Installation Standards

RoHS Compliant. RoHS 2002/95/EC

Use:

Fastening of 1 coaxial cable.
Hooking on section 40x22mm, flat an round 3-12mm

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.