

PRODUCT DATA SHEET

DAS

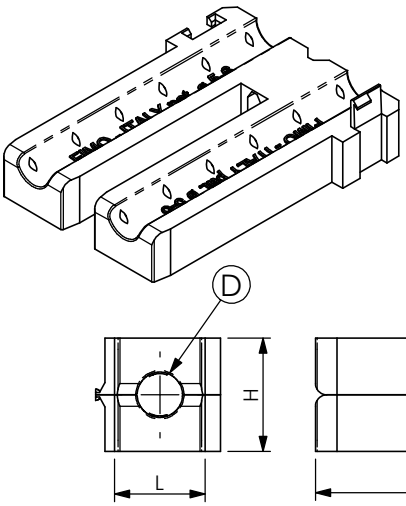

DAT

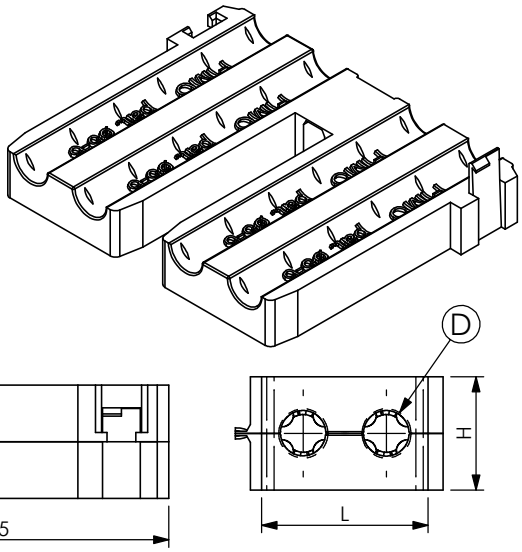

A) SPECIFICATIONS
P.A. U.V. resistant

B) RESISTANCE TESTS
Operating temperature:
-30°C + 120°C

C) PACKAGING INFORMATION
Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS
On request

CODE	ARTICLE	ø D	H	L	B	BOX	WEIGHT
61 3320 2005	DAS 5	4 - 5	15	12	45	500	5
61 3320 2006	DAS 6	5 - 6	15	12	45	500	5
61 3320 2007	DAS 7	6 - 7	15	12	45	500	5
61 3320 2008	DAS 8	7 - 8	15	12	45	500	4,5
61 3320 2009	DAS 9	8 - 9	15	12	45	500	4
61 3320 2010	DAS 10	10 - 11	15	12	45	500	4
61 3320 2012	DAS 1/2" (17)	16 - 17	27	22	45	500	8
61 3320 2078	DAS 7/8" (28)	27 - 28	38	34	45	500	16
61 3320 2206	DAT 2x6	5 - 6	15	22	45	500	5,5
61 3320 2207	DAT 2x7	6 - 7	15	22	45	500	6
61 3320 2208	DAT 2x8	7 - 8	15	22	45	500	6
61 3320 2210	DAT 2x10	10 - 11	15	22	45	500	4,5

RI	DATE	DR	DATE	AP
02				
01				
00	15/12/16	G.S.	15/12/16	A.V.
	1ST EMISSION			

Description:

DAS- Calibrated Double Saddles with flexible hinge
DAT- Calibrated Double Twin Saddles with flexible hinge

The two hinged half saddles are calibrated on the diameter of coaxial cables. Its closure system allows a provisional locking onto the cable, allowing to slip and beeing introduced laterally inside the bow of the **mRF** cable clamp

FIMO® Setting Installation Standards

RoHS compliant. RoHS 2002/95/EC

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.