

# BT-01-E

## SURFACE MOUNT BIAS TEE

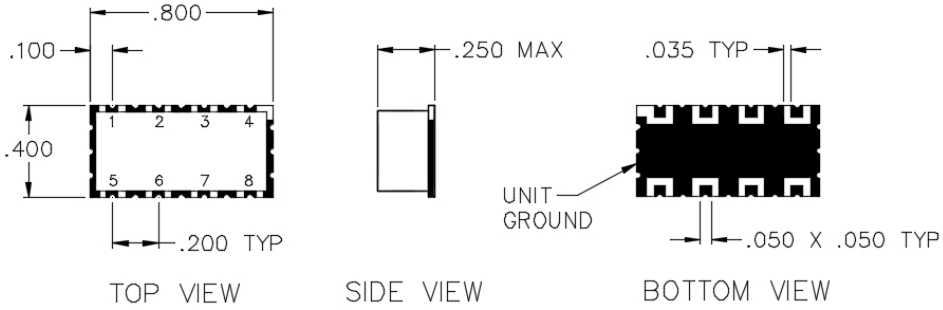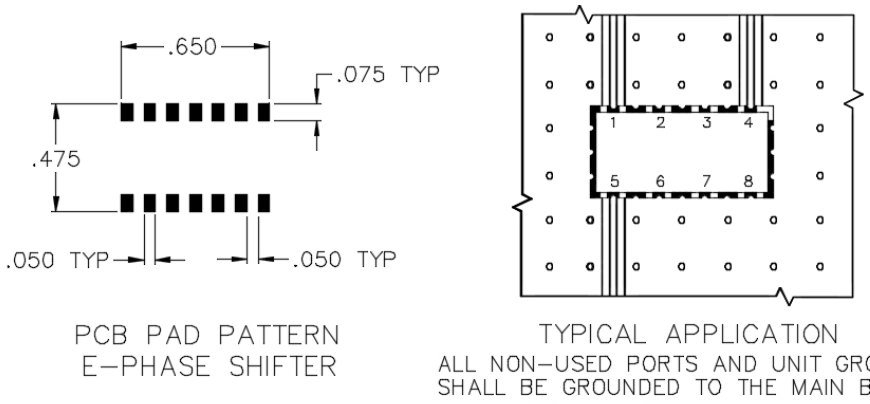


## SPECIFICATIONS

| | |
|---|---|
| Name: | BT-01-E |
| Frequency Range: | 10-1000 MHz |
| Insertion Loss: | 1.0 dB max. |
| Current: | 200 mA max. |
| Power: | 1 watts max. |
| Voltage: | 50 Vdc max. |
| Isolation: | 25 dB min. |
| VSWR: | 1.20:1 max. |
| Package Type: | Surface |

## PORT CONFIGURATION

| | |
|---|---|
| RF In (DC Blocked): | 5 |
| RF/DC Output: | 1 |
| DC In (Bias): | 4 |

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 160203

PULSAR MICROWAVE CORPORATION

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com