


FSC-FSC-A100_100-P

Description

SC adaptor, SM, UPC, blue, simplex, integrated fixing spring

Features

- High mechanical and thermal resistance according to Telcordia GR-326-CORE
- Integrated fixing spring
- Ceramic sleeves

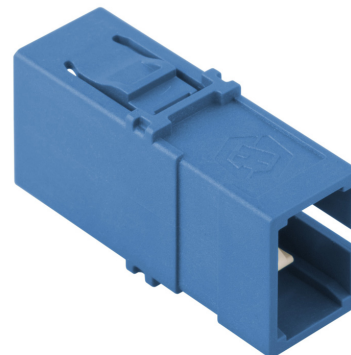

Technical Data

General Data

Characteristics	Values
Specified acc. to	IEC 61754-4, TIA 604-3
Adaptor family	SC
Adaptor type	SM UPC,
Weight in kg	0.0029
Material	Plastic
Color of housing	Blue

Mechanical Data

Characteristics	Values
Operating temperature min. (°C)	-40
Operating temperature max. (°C)	85
Min. mating cycles	1000

Optical Data


Characteristics	Values
IL repeatability (dB)	0.1

Environment Data

Characteristics	Values
RoHS compliant	Yes
REACH compliant	Yes
UV resistant	Yes
Flammability rating	UL 94 V-0
Free of halogen	Yes

FSC-FSC-A100_100-P

Technical drawing

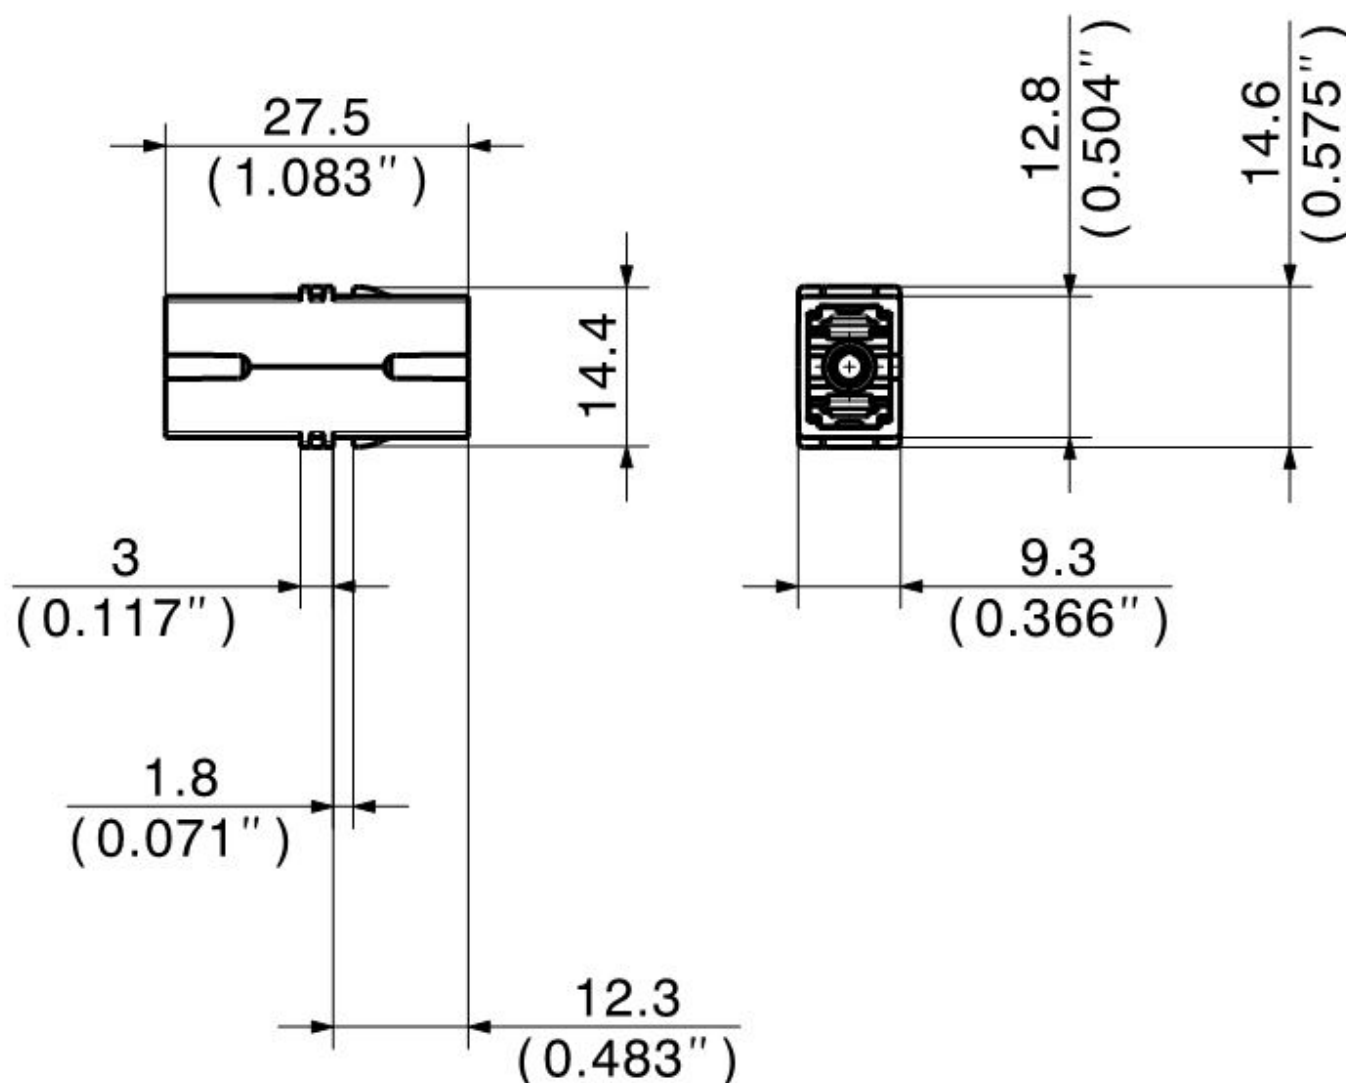

Ordering information

Description	Item number
FSC-FSC-A100_100-P	84014382