

Waveguide to Coaxial Adapter **AWR187N**

WR187 to N Female, Rectangular Cover Flange, Right Angle



Rev 3

Electrical

Frequency Range	3.94-5.99 GHz
VSWR	1.2 max

Configuration

Waveguide Size	IEC	48
	EIA	WR187
Flange Type	IEC	UDR48
	North America	Al alloy: M3922/52-014(UG1729/U) Cu alloy: M3922/52-013(UG1728/U) CPR187F
Coax Connector	N Female	
Body Geometry	Right Angle	


Materials

Waveguide Body	Aluminum, black or grey painted
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper


Mechanical & Environmental

Operating Temp	-40℃ to 70℃
Connector Interface	MIL-STD-348
RoHS	Compliant


Typical Test Data

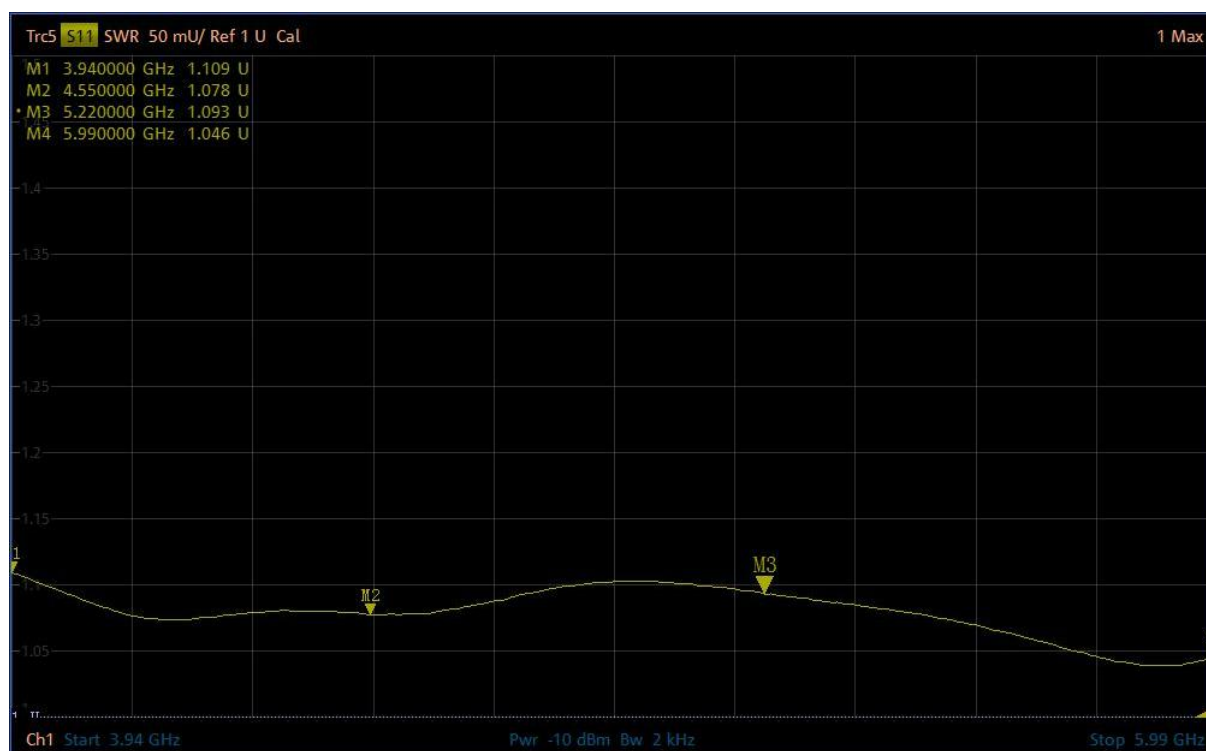

Dimensions(mm)

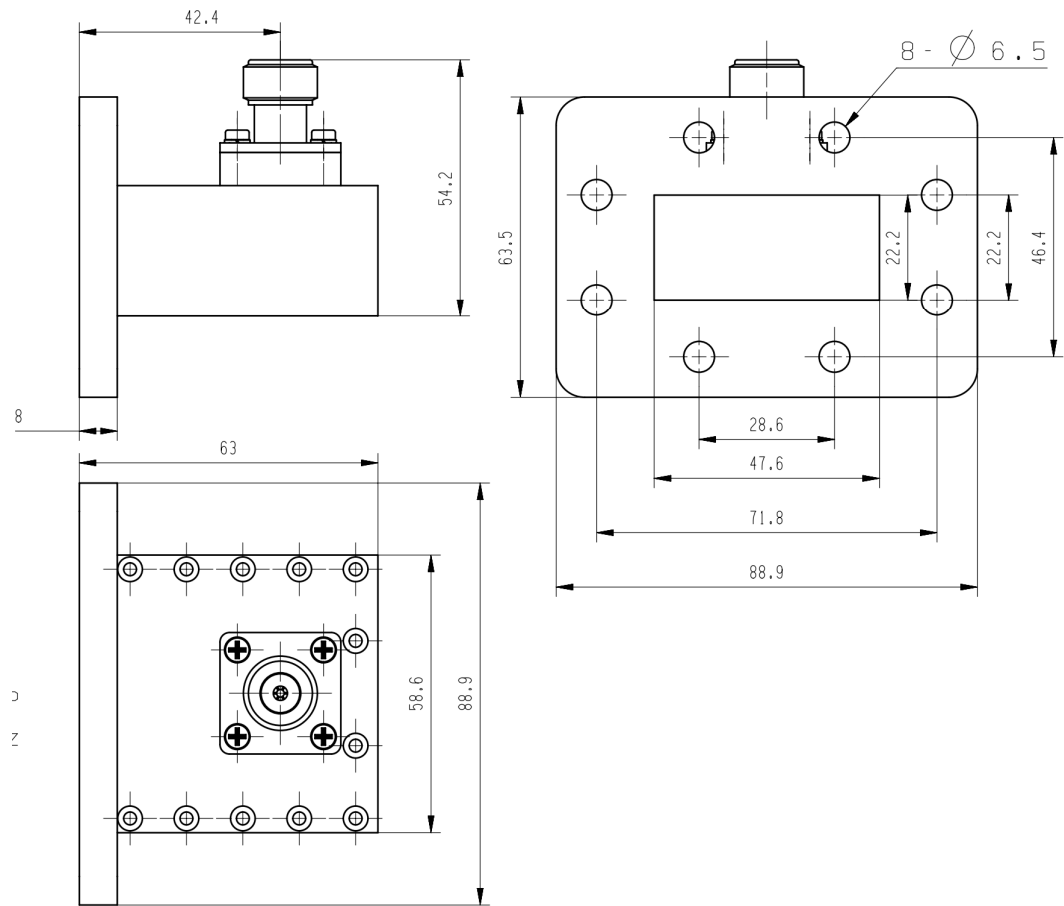

Flange Comparison (Unit mm)

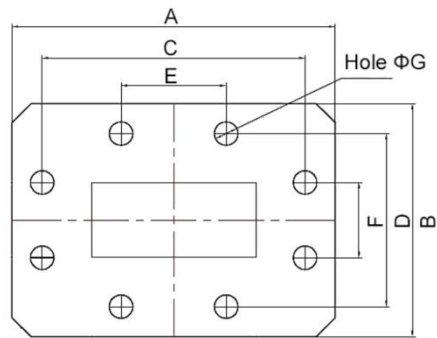

WG SIZE	CONFORMING STANDARD	A	B	C	D	E	F	G
WR187	RF ONE:AWR187N	88.9	63.5	71.8	46.4	28.6	22.2	6.5
	IEC60154:UDR48	88.90	63.50	71.84	46.44	28.60	22.24	6.35
	USA:M3922/52-014(UG1729/U)	88.90	63.50	71.84	46.44	28.60	22.24	6.53
	USA:CPR 187F	88.90	63.50	71.84	46.44	28.58	22.22	6.55

* The purpose of this size comparison is to provide a quick overview of different flange standards.

* Great care has been given nevertheless there might be a few mistakes.

* Please check the flange compatibility before ordering. Customized flanges are available.