
PRODUCT DATA SHEET

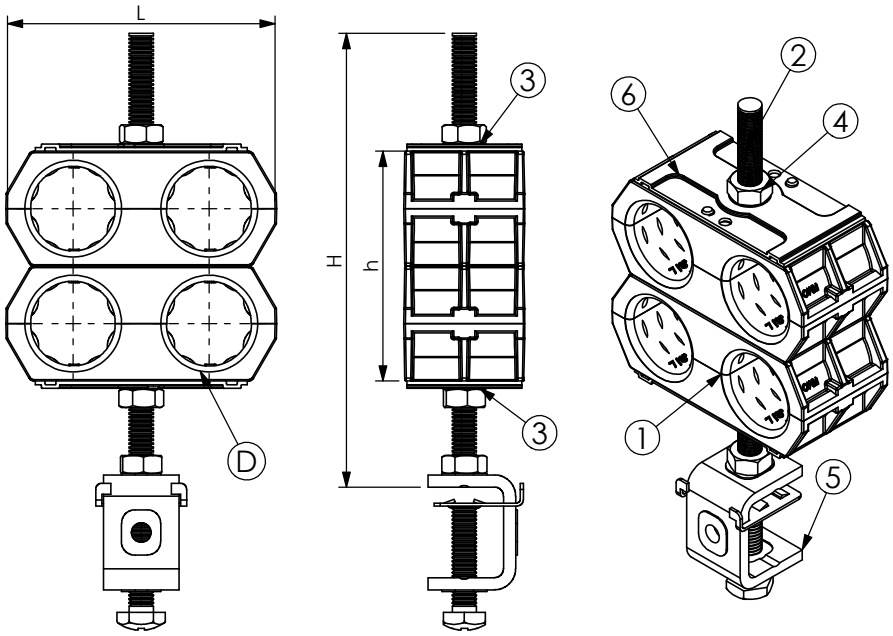

A) SPECIFICATIONS

1 *H.D.P.E. SAB duoble saddle*
2 *Stainless steel threaded bar BFI M8*
3 *Stainless steel elastic washer REI 8*
4 *Stainless steel hexagonal nut DAI 8*
5 *Stainless steel MIM clamp*
6 *Stainless steel pressure plate PRUC*

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -50°C +80°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request


CODE	ARTICLE	ø D	L	h	H	BOX	WEIGHT
61 1576 0409	UCM/ 4x9	8 - 9	56	100	42	20	355
61 1576 0411	UCM/ 4x11	10 - 11	56	100	42	20	195
61 1576 0413	UCM/ 4x13	12 -13	56	125	54	20	195
61 1576 0414	UCM/ 4x1/2"S (14)	13 - 14	68	125	54	20	225
61 1576 0438	UCM/ 4x3/8" (16)	15 - 16	68	125	54	20	225
61 1576 0412	UCM/ 4x1/2" (17)	16 - 17	68	125	54	20	225
61 1576 0458	UCM/ 4x5/8" (23)	21 - 23	90	150	76	20	225
61 1576 0478	UCM/ 4x7/8" (28)	27 - 28	90	150	76	20	305
61 1576 4118	UCM/ 4x1.1/8" (38)	36 - 38	114	200	108	20	305
61 1576 4114	UCM/ 4x1.1/4" (40)	39 - 40	114	200	108	20	365
61 1576 4148	UCM/ 4x1.5/8"S (52)	48 - 49	137	250	132	20	369
61 1576 4158	UCM/ 4x1.5/8" (52)	50 - 52	137	250	132	20	365

RI	DATE	DR	DATE	AP	*Description:*
02					*Cable Clamps type UCO +MIM 8/25 without PRUC*
01					
00	06/10/15	G.S.	06/10/15	A.V.	
	1ST EMISSION				

FIMO
Setting Installation Standards

RoHS

Use: *Fixing of 4 cables on flat 3-25 and round ø 8-25.*



FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.