

Waveguide to Coaxial Adapter AWR75SMAEU

WR75 to SMA Female, UDR120 Cover Flange, End Launch

Rev 1

Electrical

Frequency Range	9.84-15 GHz
VSWR	1.2 max

Configuration

Waveguide Size	IEC	R120
	EIA	WR75
Flange Type	IEC	UDR120
Coax Connector	SMA Female	
Body Geometry	End Launch	


Materials

Waveguide Body	Aluminum, black or grey painted
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper

Mechanical & Environmental

Operating Temp	-40℃ to 70℃
Connector Interface	MIL-STD-348
RoHS	Compliant

Typical Test Data

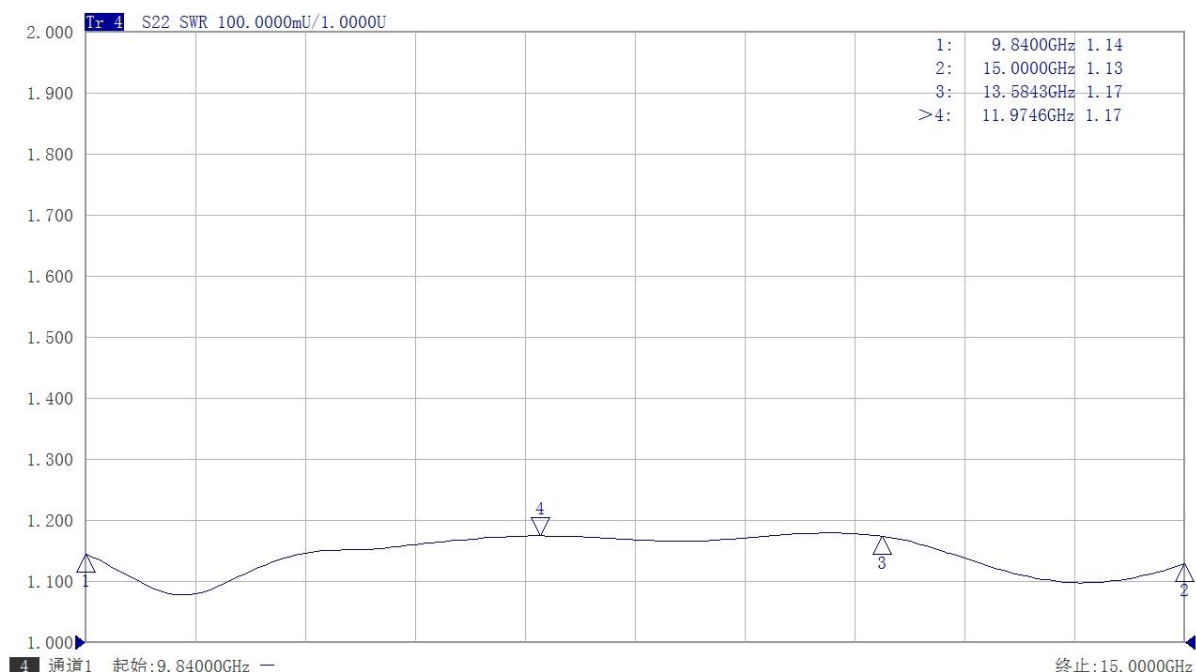

Waveguide to Coaxial Adapter AWR75SMAEU

WR75 to SMA Female, UDR120 Cover Flange, End Launch

Rev 1

Dimensions(mm)

