


Specifications

1	Pass Band Frequency	1.5 ~8.0 GHz
2	Pass Band Insertion Loss	≤2.0dB @ 1.5 ~1.65 GHz ≤1.0dB @1.65 ~8.0 GHz
3	Pass Band VSWR	≤1.5
4	Stop Band Attenuation	≥60dB @ DC ~1.28 GHz
5	Impedance	50 ohms
6	Power	≤15W
7	Connectors	SMA-Female
8	Surface Finish	Black Paint
9	Temperature Range	-55℃ ~ +85℃
10	Weight	70 g

Dimensions (Unit: mm)

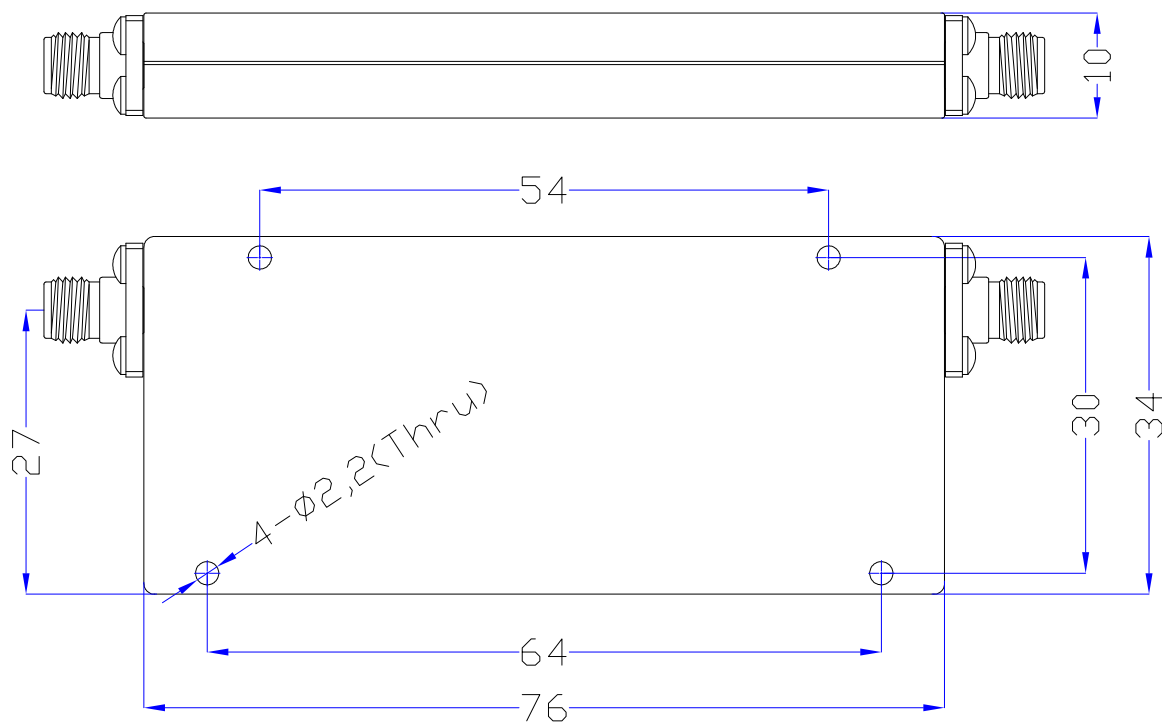

Typical Test Data

