


SURGE PROTECTOR

This surge protector adopts the voltage penetrating through conduction current principle which achieves the good lightning protection effect. The simple & firm structure makes it easy to install.

Specifications	
Model	BL-23TP-KK
Freq. Range-MHz	DC-3000
Max Power-W	200
Discharge Voltage-V	DC230
Nominal Impedance-Ω	50
VSWR	≤1.3
Insertion Loss-dB	≤0.5
Lightning Protection	Voltage Penetrate Conduction Current
Connector Type	N-Female/N-Female
Size-mm	65×25
Weight-g	130

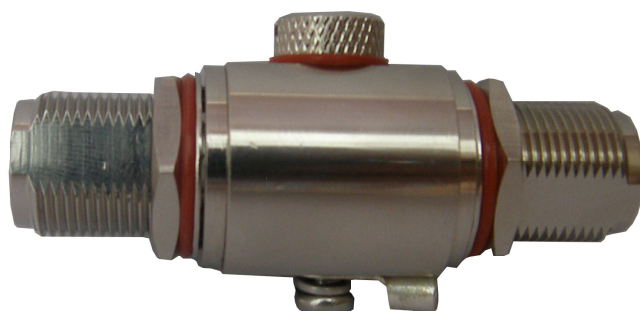

KENBOTONG TECHNOLOGY CO., LTD.

Add: NO.2 Chanxiu Road, Foshan City, Guangdong China Code:528061

Tel: 86(757)8202-5597 8221-9788

Fax: 86(757)8221-2072,8802-2808

E-mail:kbt@kenbotong.com

<http://www.kenbotong.com>