
PRODUCT DATA SHEET

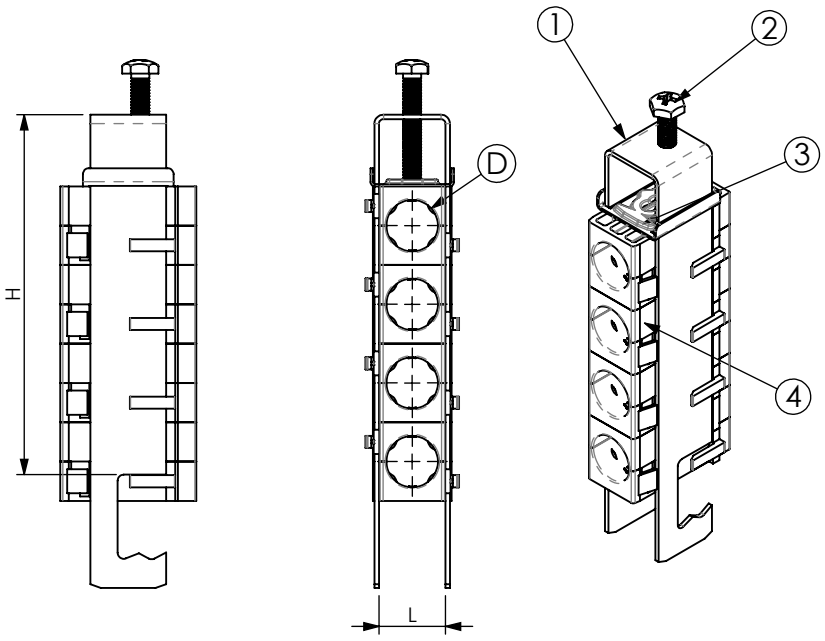

A) SPECIFICATIONS

1 *Stainless steel AISI304 bow*
Hooking on flat 3-25 and round ø 8-25.
2 *Self-locking pressure screw M6 or M8 AISI304*
3 *Stainless steel AISI304 sliding pressure plate.*
4 *SAS black P.A.fiberglass saddles*

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to IEC 60068-2-6
Corrosion test: UNI EN ISO 9227
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST026

CODE	ARTICLE	ø D	L	H	BOX	WEIGHT
61 1556 1411	sRF M/ 4x11	10 - 11	22	118	50	162
61 1556 4012	sRF M/ 4x12	11 - 12	22	118	50	156
61 1556 1412	sRF M/ 4x1/2" (17)	16 - 17	22	118	50	156
61 1556 1478	sRF M/ 4x7/8" (28)	27 - 28	34	166	50	256

RI	DATE	DR	DATE	AP
02				
01				
00	20/06/17	G.S.	20/06/17	A.V.
	1ST EMISSION			


Description:

Stainless cable clamps type sRF M
For 4 coaxial cables, complete with 6 calibrated saddles.
For articles see schedule.

FIMO® Setting Installation Standards

RoHS compliant · RoHS 2002/95/EC

Use: *Fixing of 4 cables on flat 3-25 and round ø 8-25.*



FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.