
PRODUCT DATA SHEET

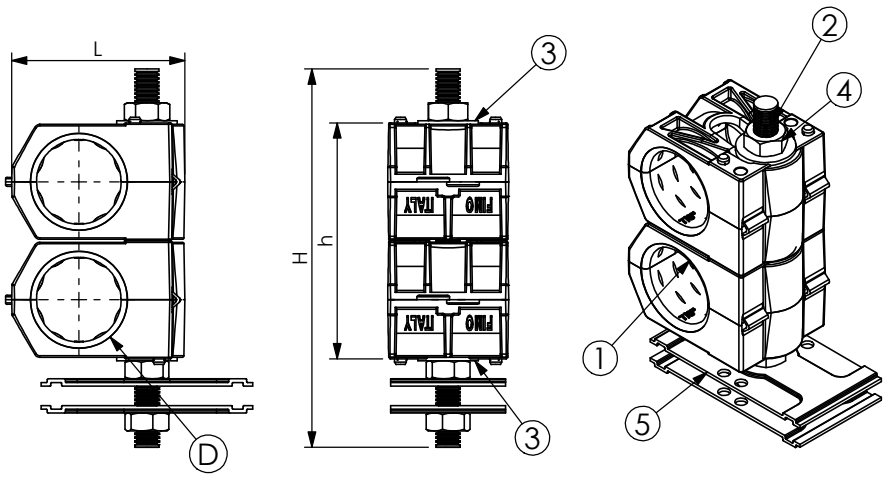

A) SPECIFICATIONS

1 *P.P. SAM hinged single saddle*
2 *Stainless steel threaded bar BFI M8*
3 *Stainless steel elastic washer RPI 10/20*
4 *Stainless steel hexagonal nut DAI 8*
5 *Stainless steel pressure plate PRUC*

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -50°C +80°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	ø D	L	h	H	BOX	WEIGHT
61 1578 0211	USL/ 2x11	10 - 11	44	100	42	20	98
61 1578 0214	USL/ 2x1/2"S (14)	13 - 14	50	100	54	20	110
61 1578 0212	USL/ 2x1/2" (17)	16 - 17	50	100	54	20	110
61 1578 0278	USL/ 2x7/8" (28)	27 - 28	59	125	76	20	160
61 1578 2114	USL/ 2x1.1/4" (40)	39 - 40	70	200	108	20	195
61 1578 2158	USL/ 2x1.5/8" (52)	50 - 52	80	200	132	20	255

RI	DATE	DR	DATE	AP	Description:
02					Cable Clamps type USO+2 PUC 70
01					
00	06/10/15	G.S.	06/10/15	A.V.	
	1ST EMISSION				

FIMO® Setting Installation Standards

RoHS Compliant · RoHS 2002/95/EC

Use:

Fixing of 2 cables on steel wire-mesh cable trays

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.