PRODUCT DATA SHEET

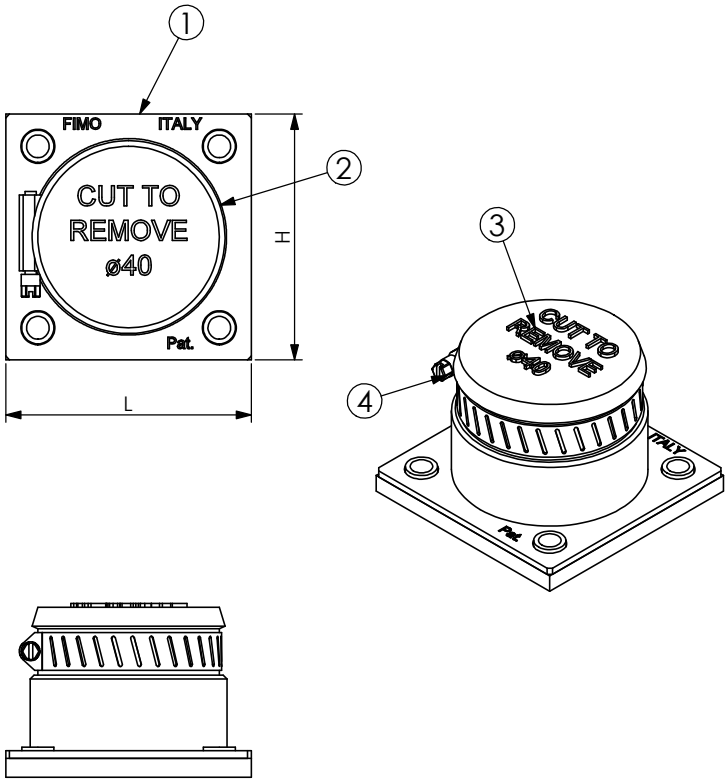

A) SPECIFICATIONS

1 *Stainless Steel Plate*
2 *Black EPDM Gasket*
3 *Removable Protective Film*
4 *Stainless Steel Hose Clamp for Collar (FAS)*

B) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

C) MOUNTING INSTRUCTIONS

On request

CERTIFICATION	
IEC 60529 IP67	Waterproof
REI 120	Fire Resistent
EN 1366-3:2009	Fire Resistent

CODE	ARTICLE	HOLES	MEASURES		WALL HOLE		FAS	LUS	BAG	BOX	WEIGHT
			H	L	●	■					
61 1515 0138	**PPS 1/40**	1 x Ø 40	65	65	1x Ø 40	-	1	1	1	10	125
61 1515 0162	**PPS 1/62**	1 x Ø 62	85	85	1 x Ø 62	-	1	1	1	10	157
61 1515 0001	**PPS 90**	1 x Ø 90	115	115	1 x Ø 100	90 x 90	1	1	1	10	330
61 1515 0011	**PPS 1/ 90**	1 x Ø 90	150	150	1 x Ø 92	90 x 90	1	1	1	10	560

RI	DATE	DR	DATE	AP
02				
01				
00	29/01/16	G.S.	29/01/16	A.V.
	1ST EMISSION			

Description:

PPS - Wall Entry

Passing through Ø 40, 62, 90, for any kind of cable.
Easy and quick sealing with hose clamp.
Easy and quick installation.
Fixings accessories included.
Round and sectorial cushions available.
Grounding bar on request.

FIMO®
Setting Installation Standards

RoHS
Compliant · RoHS 2002/95/EC

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.

PRODUCT DATA SHEET

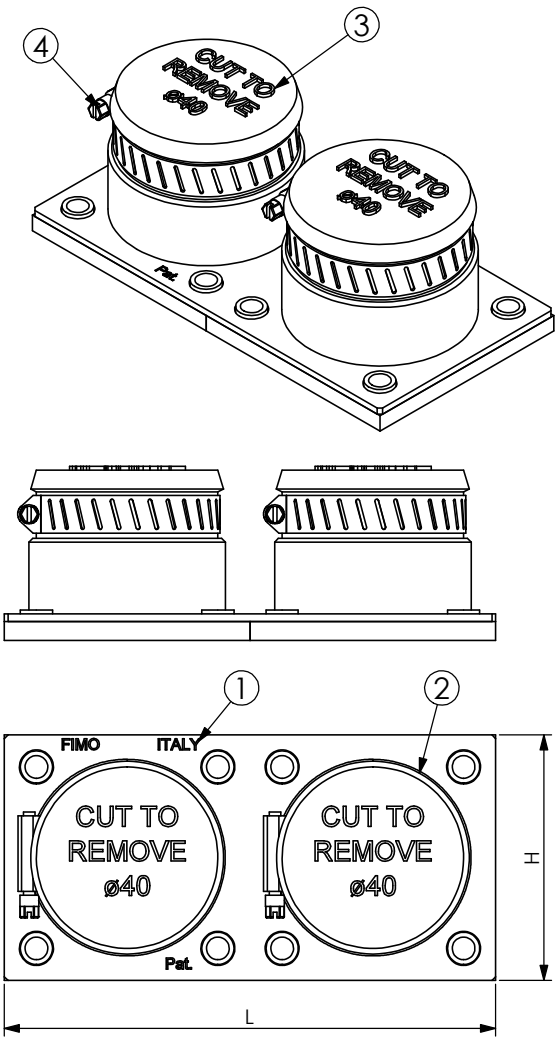

A) SPECIFICATIONS

1 *Stainless Steel Plate*
2 *Black EPDM Gasket*
3 *Removable Protective Film*
4 *Stainless Steel Hose Clamp for Collar (FAS)*

B) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity, production batch,
FIMO logo and figure.
(Customer code on request).

C) MOUNTING INSTRUCTIONS

On request

CERTIFICATION	
IEC 60529 IP67	Waterproof
REI 120	Fire Resistent
EN 1366-3:2009	Fire Resistent

CODE	ARTICLE	HOLES	MEASURES		WALL HOLE		FAS	LUS	BAG	BOX	WEIGHT
			H	L	●	■					
61 1515 0238	**PPS 2/40**	2 x Ø 40	65	130	2x Ø 40	-	2	2	1	10	250
61 1515 0262	**PPS 2/62**	2 x Ø 62	85	170	2 x Ø 62	-	2	2	1	10	314
61 1515 0012	**PPS 2/ 90**	2 x Ø 90	150	300	2x Ø 90	90 x 240	2	2	1	-	1000

RI	DATE	DR	DATE	AP
02				
01				
00	29/01/16	G.S.	29/01/16	A.V.
	1ST EMISSION			

Description:

PPS - Wall Entry

Passing through Ø 40, 62, 90, for any kind of cable.
Easy and quick sealing with hose clamp.
Easy and quick installation.
Fixings accessories included.
Round and sectorial cushions available.
Grounding bar on request.

FIMO®
Setting Installation Standards

RoHS

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.

PRODUCT DATA SHEET

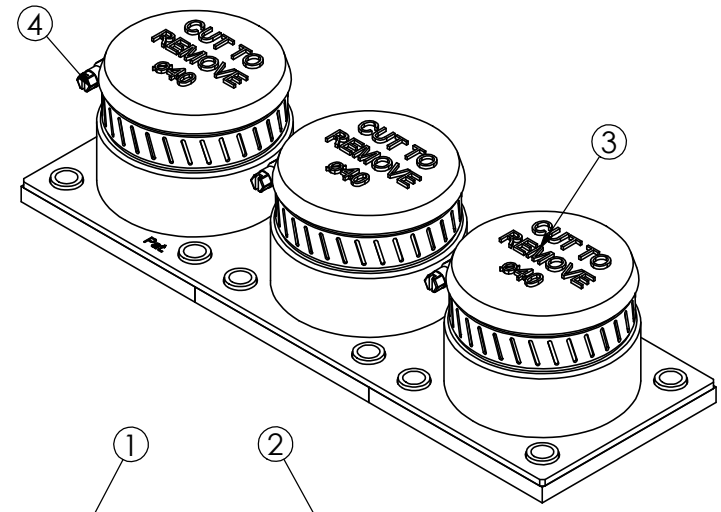

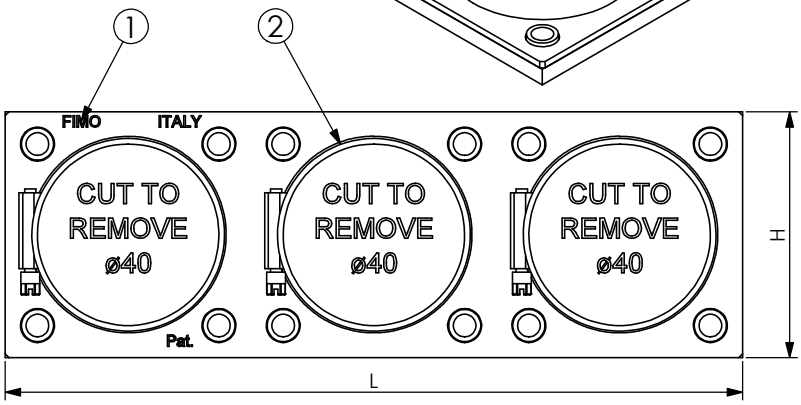

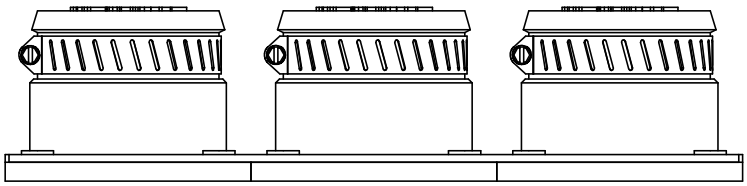

A) SPECIFICATIONS

1 *Stainless Steel Plate*
2 *Black EPDM Gasket*
3 *Removable Protective Film*
4 *Stainless Steel Hose Clamp for Collar (FAS)*

B) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity, production batch,
FIMO logo and figure.
(Customer code on request).

C) MOUNTING INSTRUCTIONS

On request

CERTIFICATION	
IEC 60529 IP67	Waterproof
REI 120	Fire Resistent
EN 1366-3:2009	Fire Resistent

CODE	ARTICLE	HOLES	MEASURES		WALL HOLE		FAS	LUS	BAG	BOX	WEIGHT
			H	L	●	■					
61 1515 0338	**PPS 3/40**	3 x Ø 40	65	195	3 x Ø 40	-	3	2	1	10	375
61 1515 0362	**PPS 3/62**	3 x Ø 62	85	255	3 x Ø 62	-	3	2	1	10	471
61 1515 0013	**PPS 3/ 90**	3 x Ø 90	150	450	3 x Ø 90	90 x 390	3	2	1	-	1400

RI	DATE	DR	DATE	AP
02				
01				
00	29/01/16	G.S.	29/01/16	A.V.
	1ST EMISSION			

Description:

PPS - Wall Entry

Passing through Ø 40, 62, 90, for any kind of cable.
Easy and quick sealing with hose clamp.
Easy and quick installation.
Fixings accessories included.
Round and sectorial cushions available.
Grounding bar on request.

FIMO®
Setting Installation Standards

RoHS Compliant · RoHS 2002/95/EC

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.

PRODUCT DATA SHEET

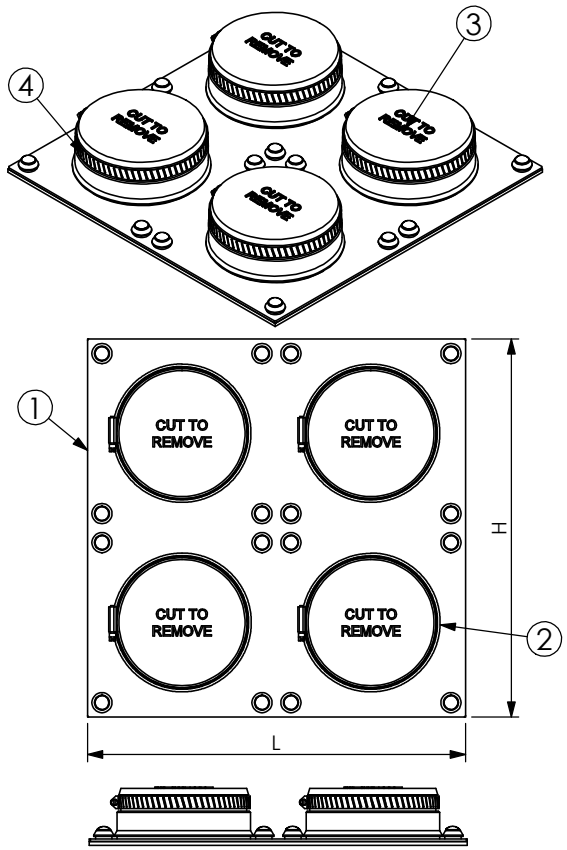

A) SPECIFICATIONS

1 *Stainless Steel Plate*
2 *Black EPDM Gasket*
3 *Removable Protective Film*
4 *Stainless Steel Hose Clamp for Collar (FAS)*

B) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity, production batch,
FIMO logo and figure.
(Customer code on request).

C) MOUNTING INSTRUCTIONS

On request

CERTIFICATION	
IEC 60529 IP67	Waterproof
REI 120	Fire Resistent
EN 1366-3:2009	Fire Resistent

FIGURE	CODE	ARTICLE	HOLES	MEASURES		WALL HOLE		FAS	LUS	BAG	BOX	WEIGHT
				H	L	●	■					
	61 1515 0022	**PPS 2x2/ 90**	4 x Ø 90	300	300	4 x Ø 90	240 x 240	4	2	1	-	2000
	61 1515 0023	**PPS 2x3/ 90**	6 x Ø 90	300	450	6 x Ø 90	240 x 390	6	3	1	-	3000
	61 1515 0024	**PPS 2x4/ 90**	8 x Ø 90	300	600	8 x Ø 90	240 x 540	8	3	**1**	-	4000
	61 1515 0025	**PPS 2x5/ 90**	10 x Ø 90	300	750	10 x Ø 90	240x690	10	4	**1**	-	5200
	61 1515 0026	**PPS 2x6/ 90**	12 x Ø 90	300	900	12 x Ø 90	240 x 840	12	4	1	-	5800
	61 1515 0033	**PPS 3x3/ 90**	9 x Ø 90	450	450	9 x Ø 90	390 x 390	9	4	1	-	4600

RI	DATE	DR	DATE	AP
02				
01				
00	29/01/16	G.S.	29/01/16	A.V.
	1ST EMISSION			

FIMO® Setting Installation Standards

RoHS compliant · RoHS 2002/95/EC

Description:

PPS - Wall Entry

Passing through Ø 40, 62, 90, for any kind of cable.
Easy and quick sealing with hose clamp.
Easy and quick installation.
Fixings accessories included.
Round and sectorial cushions available.
Grounding bar on request.

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.