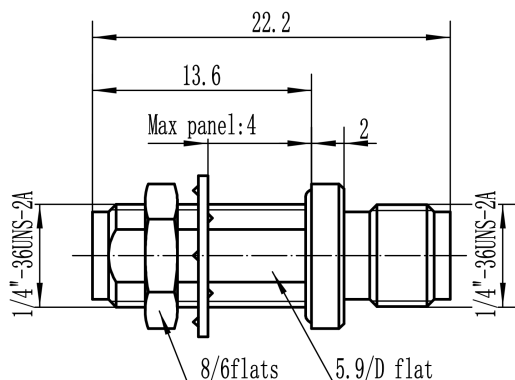


Drawing(mm)

Electrical & Environmental

Impedance	50 ohm
Frequency Range	40 GHz
VSWR	1.15 max
Operating Temp	-55℃ to +165℃
Interface	2.92mm per MIL-STD-348

Material

Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper
Insulator	PEI
O-ring	Silicone rubber

Typical Test Data
