Data Sheet


HUBER+SUHNER

Coaxial Panel Connector
23_BMA-N50-0-16/119_N

Description

Straight panel receptacle jack, flange mount

Interface standards
IEC 60169-33_MIL-STD-348/321 fully intermateable

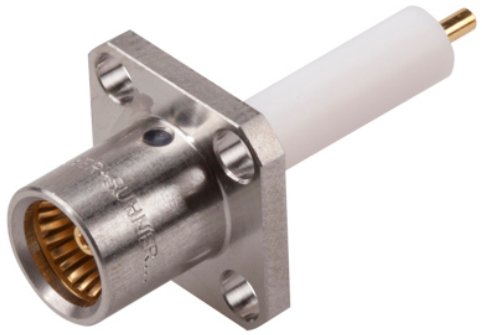

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	18 GHz

Mechanical Data

Number of matings	1000
Weight	0.0036 kg

Environmental Data

Operating temperature	-65 °C to 125 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact	Copper Beryllium Alloy	Gold Plating (without Nickel underplating)
Body	Stainless Steel	
Insulator	PFA / PTFE	

Related Documents

Outline drawing	DOU-00308860
Catalogue drawing	DCA-00321890

Ordering Information

Single package	23_BMA-N50-0-16/119_NE

Waiver: It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general information purposes only.