


FLC-Z/K-B010_100-P

Description

LC TB BTW connector, G50/125, G62.5/125 / OM3, black

Features

- High mechanical stability
- Colour coded boot for good visibility also in mated condition



Technical Data

General Data

Characteristics	Values
Specified acc. to	IEC 61754-20, TIA 604-10-A
Connector family	LC
Connector type	G50/125, G62.5/125, OM3
Polishing	PC
Weight in kg	0.0005
Material	Plastic
Color of housing	Black

Mechanical Data

Characteristics	Values
Operating temperature min. (°C)	-45
Operating temperature max. (°C)	85
Min. mating cycles	1000
Tensile load (N)	5

Optical Data


Characteristics	PC
IL 97% (dB)	0.5
IL typ. (dB)	0.2
RL (dB)	>35

Environment Data

Characteristics	Values
Free of halogen	Yes
RoHS compliant	Yes
REACH compliant	Yes
UV resistant	Yes
Flammability rating	UL 94 V-0

FLC-Z/K-B010_100-P

Technical drawing

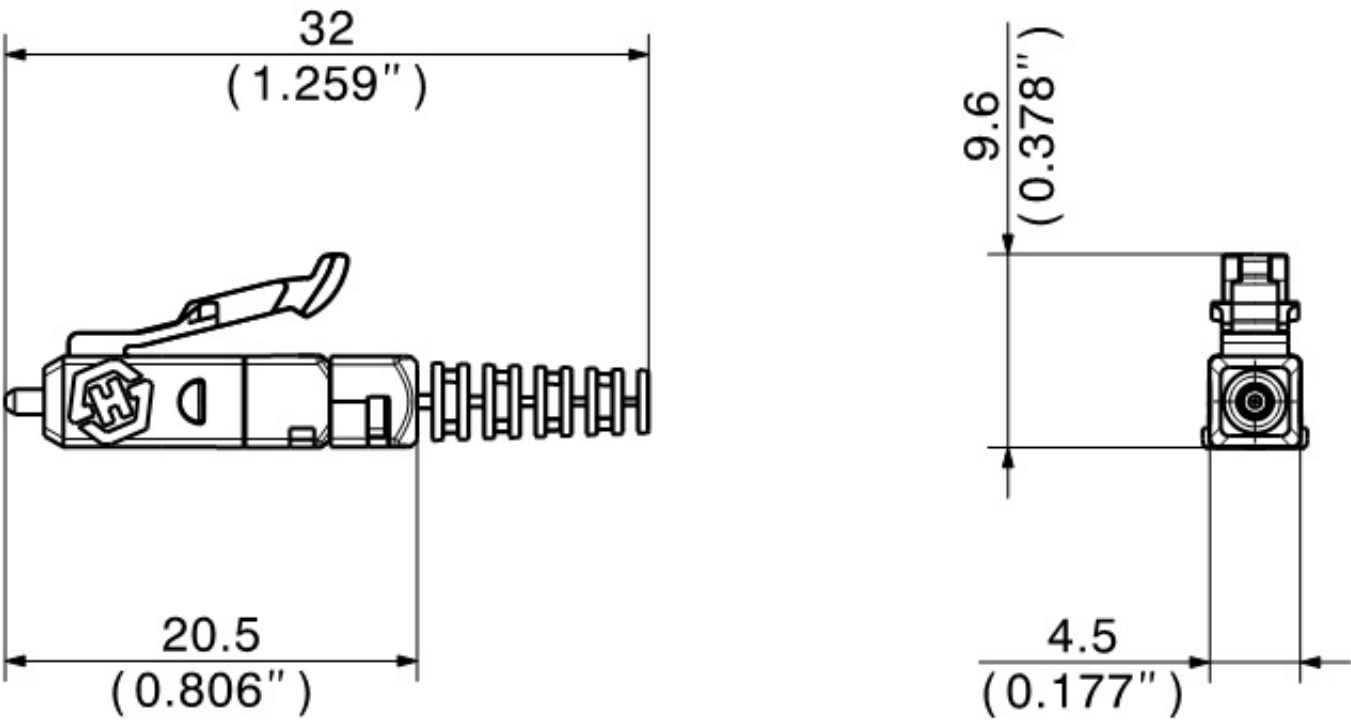

Ordering information

Description	Item number
FLC-Z/K-B010_100-P	85005568