Coaxial RF Termination

RFT67021851A

DC-67 GHz, 1.85mm Female, 2 Watts



Rev 1

Electrical

Impedance	50 ohm
Frequency Range	DC-67 GHz
VSWR	1.3 max
Input Avg Power	2W@25℃ ambient, derating linearly to 0.2W at 100℃
Peak Power	50W (5 micro-sec pulse width, 2% duty cycle)


Mechanical

Connector Body	Passivated stainless steel
Center Contact	1.27um gold plated BeCu
Net Weight	5g


Environmental

Operating Temp	-55℃ to 100℃
Storage Temp	-55℃ to 125℃
RoHS	Compliant

Dimensions(mm)

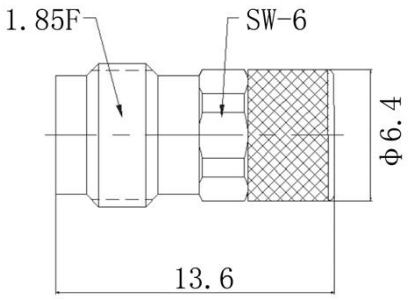

Typical Test Data

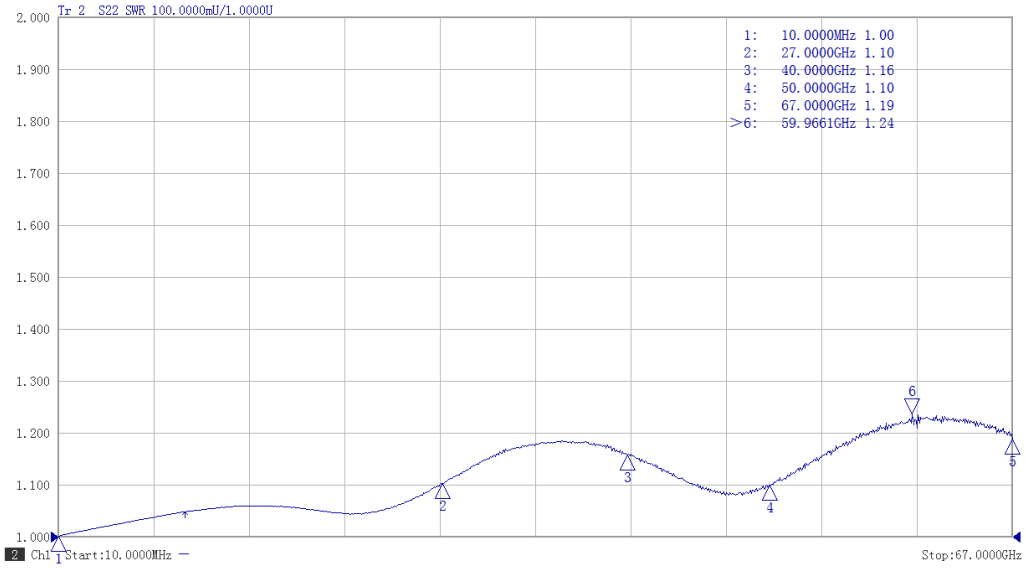

Notes

1.Customized outlines and optimal VSWR available.