WPE

Waterproofing Enclosure





MATERIAL	
Housing material	PC/PP Alloy
Sealing material	High Quality Silicon Gel
Plastic Parts	UV Resistant
Waterproof	IP68
Colour	Black

WPE- Waterproofing Enclosure
For Coaxial Cable Applications

The WPE is a gel closure sealing system that provides a reliable sealing of coaxial connectors used at the transition between:
- JUMPER and ANTENNA
- JUMPER and FEEDER CABLE

exposed to the outside environment.

The housing contains an innovative gel material and provides an efficient moisture block. The ease of installation and long-term protection makes it reliable and cost effective solution.

FEATURES & BENEFITS
- Quick and Easy installation
- No need special training
- Easy removable and reusable
- Wraparound and no disconnection of the connector
- No tape, no mastics or tools required for installation and removal

Operating temperature range: -40 C° / + 65 C°
Storage temperature range: -40 C° / + 65 C°

WPE- Sistema di Sigillatura per Connettori
Per Applicazioni con Cavi Coassiali

I WPE sono dei sistemi di sigillatura con gel che garantiscono una tenuta stagna dei connettori usati nelle connssioni tra:
- JUMPER e ANTENNA
- JUMPER e CAVO COASSIALE

esposti agli agenti atmosferici.

Il guscio di plastica racchiude un gel innovativo che provvede adeguata tenuta all'umidità. La facilità d'installazione e una protezione di lunga durata fanno del WPE una soluzione affidabile e conveniente.

SPECIFICHE & BENEFICI
- Installazione semplice e veloce
- Addestramento specifico non necessario
- Facilmente removibile e riutilizzabile
- Avvolgente e senza rischio di disconnessione del connettore
- Per l'installazione e la rimozione non sono richiesti nastri, mastici o utensili

Temperatura di esercizio: -40 C° / + 65 C°
Temperatura di stoccaggio: -40 C° / + 65 C°

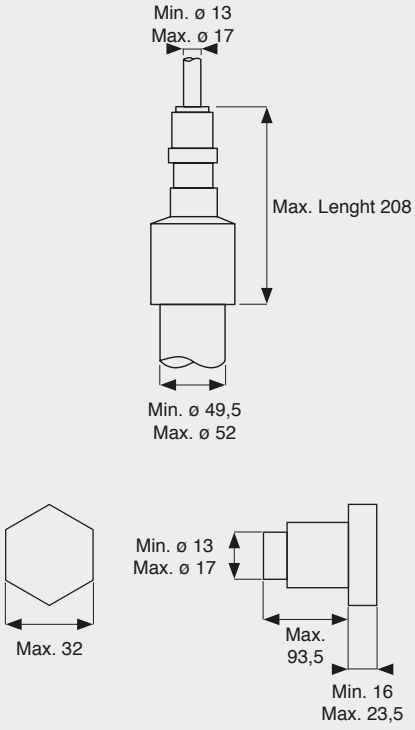

CODE	ARTICLE	NUMBER	FEEDER	ANTENNA CONNECTOR	BOX	WEIGHT
61 2204 0012 S	**WPE 1/2" JTA-S**	1/2" = 13 - 17	-	7/16 = 26mm (max)	-	80
61 2204 0012	**WPE 1/2" JTA**	1/2" = 13 - 17	-	7/16 = 26mm (max)	-	120
61 2204 0078	**WPE 7/8"**	1/2" = 13 - 17	7/8" = 27 - 28	-	-	260
61 2204 0114	**WPE 1.1/4"**	1/2" = 13 - 17	1.1/4" = 38 - 40	-	-	320
61 2204 0158	**WPE 1.5/8"**	1/2" = 13 - 17	1. 5/8" = 49 - 52	-	-	400

Copyright © Fi.Mo.Tec. S.p.A.