
PRODUCT DATA SHEET

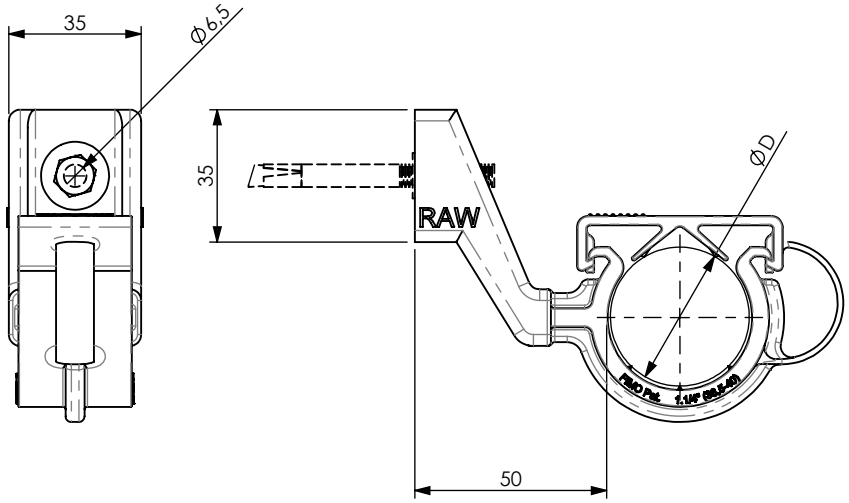

A) SPECIFICATIONS

1 Cable clamp. Material: PA6-VO, black colour, self extinguishing, halogen free (according to UL94-VO).

B) OPERATING TEMPERATURE


Working temperature : -40°C +125°C.
Installation temperature : -20°C +60°C.

C) DELIVERY MODALITIES

Packing in boxes. Label indicating: product code, article, quantity, production batch, FIMO logo and figure. (Customer code on request).

D) MOUNTING INSTRUCTIONS

IT043

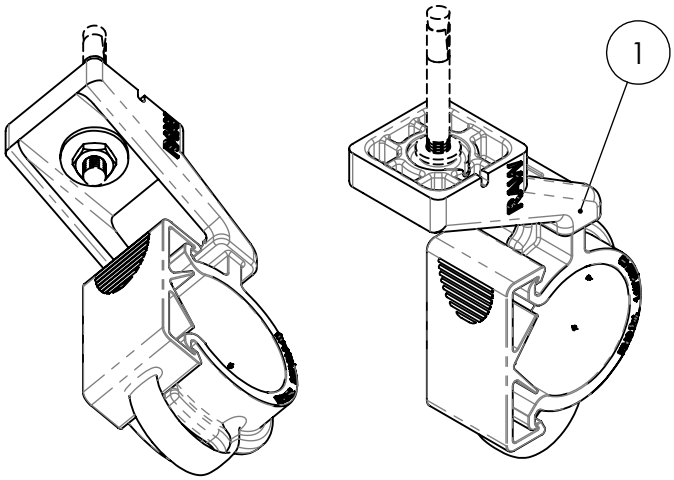

code	**6150015114**
article	RAW 1.1/4"-50

D		
38.5-40	50	0.0552kg

RI	DATE	DR	DATE	AP
02				
01				
00	05/12/2016	E.B.	05/12/2016	A.V.
	1ST EMISSION			

Description:

RAW 1.1/4"-50
Radiating Cable Clamps

FIMO
Setting Installation Standards

RoHS Compliant. RoHS 2002/95/EC

Use: Horizontal or vertical installation of radiating cables in tunnel

** Suitable for installation in high speed railway tunnel application (350 km/h)*

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.