
PRODUCT DATA SHEET

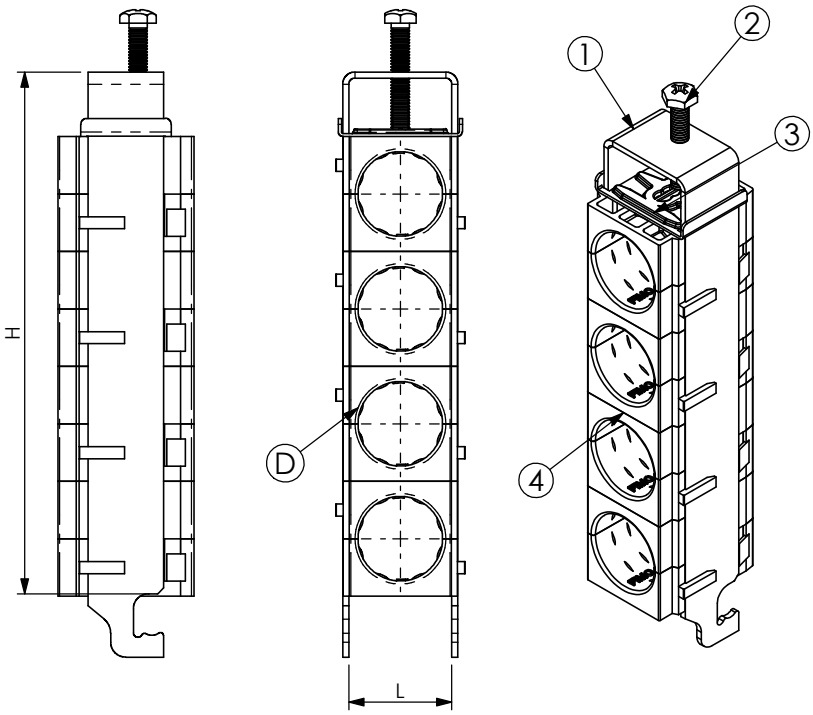

A) SPECIFICATIONS

1 *Stainless steel bow*
Hooking onsection 40x22,
flat and round 3-12mm
2 *Self-locking pressure screw M6*
3 *Stainless steel sliding pressure plate.*
4 *SAS black P.A. fiberglass saddles*

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST026

CODE	ARTICLE	ø D	L	H	BOX	WEIGHT
61 1558 1411	sRF E/ 4x11	10 - 11	22	118	50	173
61 1558 1412	sRF E/ 4x1/2" (17)	16 - 17	22	118	50	166
61 1558 1478	sRF E/ 4x7/8" (28)	27 - 28	34	166	50	293

RI	DATE	DR	DATE	AP
02				
01				
00	05/10/15	G.S.	05/10/15	A.V.
	1ST EMISSION			

Description:

Stainless cable clamps type sRF E
For 4 coaxial cables, complete with 8 calibrated saddles.
For articles see schedule.

FIMO®
Setting Installation Standards

RoHS

Use:

Hooking of 4 coaxial cables on section 40x22, flat and round 3-12mm.

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.