
PRODUCT DATA SHEET

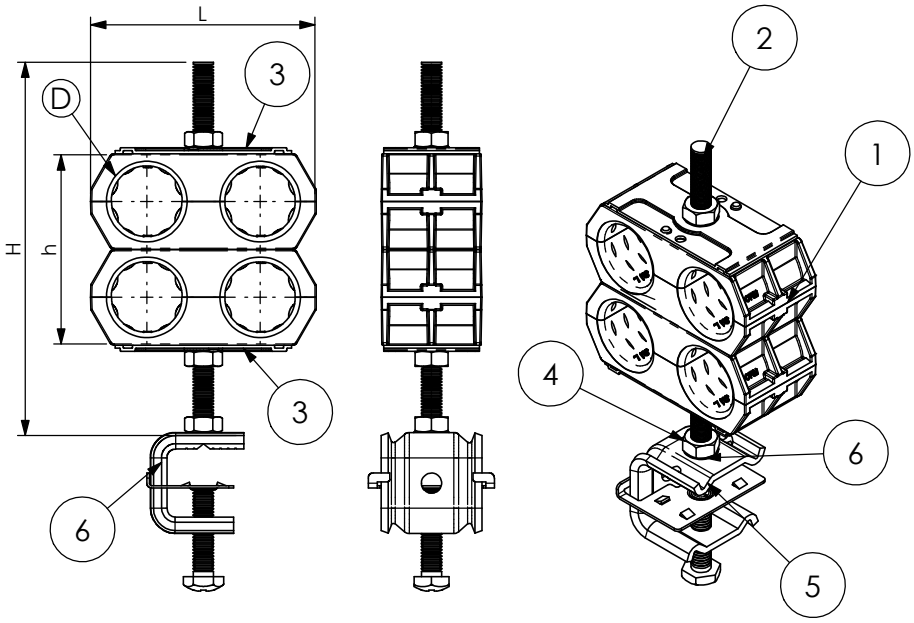

A) SPECIFICATIONS

1 *Calibrated twin black saddles made in H.D.P.E*
2 *Stainless steel threaded bar BFI M8*
3 *Stainless steel pressure plate PRUC*
4 *Stainless steel hexagonal nut DAI 8*
5 *Stainless steel MCM 8 clamp*
6 *Stainless steel flat Washer REI 8*

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature:-30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity, production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	ø D	L	h	H	BOX	WEIGHT
61 1560 0409	UCC/ 4x9	8 - 9	56	100	42	20	390
61 1560 0411	UCC/ 4x11	10 - 11	56	100	42	20	230
61 1560 0413	UCC/ 4x13	12 - 13	56	125	54	20	230
61 1560 0414	UCC/ 4x1/2"S (14)	13 - 14	68	125	54	20	260
61 1560 0438	UCC/ 4x3/8" (16)	15 - 16	68	125	54	20	260
61 1560 0412	UCC/ 4x1/2" (17)	16 - 17	68	125	54	20	260
61 1560 0458	UCC/ 4x5/8" (23)	21 - 23	90	150	76	20	260
61 1560 0478	UCC/ 4x7/8" (28)	27 - 28	90	150	76	20	340
61 1560 4118	UCC/ 4x1.1/8" (38)	36 - 38	114	200	108	20	340
61 1560 4114	UCC/ 4x1.1/4" (40)	39 - 40	114	200	108	20	400
61 1560 4148	UCC/ 4x1.5/8"S (49)	48 - 49	137	250	132	20	404
61 1560 4158	UCC/ 4x1.5/8" (52)	50 - 52	137	250	132	20	400

RI	DATE	DR	DATE	AP
02				
01				
00	03/11/2015	G.S.	03/11/2015	A.V.
	1ST EMISSION			

Description:

Cable Clamp type UCC +MCM 8 Clamp

FIMO® Setting Installation Standards

RoHS

Use:

Fastening of 4 cables on flats, rounds and angulars

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.