
# CS20-52-436/9

## 20 DB 2.92MM DIRECTIONAL COUPLER

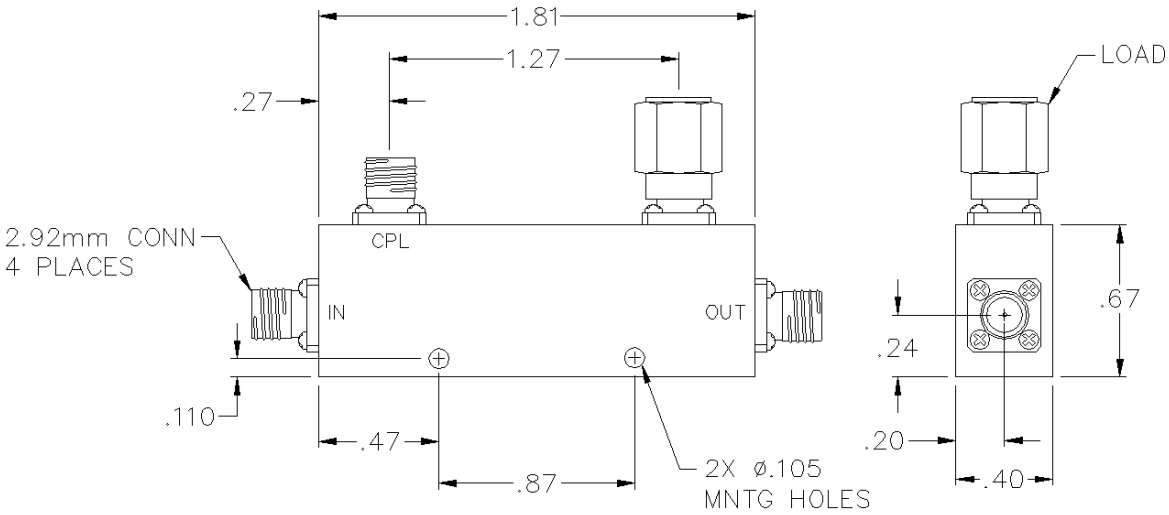


## SPECIFICATIONS

| | |
|---|---|
| Name: | CS20-52-436/9 |
| Frequency Range: | 2-40 GHz |
| Coupling: | 20.0 ± 1.00 dB |
| Coupling Flatness: | ±1.00 dB max. |
| Insertion Loss: | 1.60 dB max. |
| Directivity: | 10 dB min. |
| VSWR: | 1.80:1 max. |
| Input Power: | 20 watts max. |
| Reflected Power: | 20 watts max. |
| Connector Type: | 2.92 |

Insertion loss does not include coupling loss.
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 170130

PULSAR MICROWAVE CORPORATION

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com