

TQJ-150G

Fiberglass Omni Antenna

Technical Sheet



Notes: The picture is for reference only ,
please kindly consult with the real product.

Applications

- Trunking communications system
- Wireless video transmission
- Wireless data transmission


Features

- Low VSWR, Stable performance
- Fiberglass Radome
- Strong environment adaptability

Specifications

Model	TQJ-150G
Freq. Range-MHz	136~144
Bandwidth-MHz	8
Gain-dBi	5.5
Vertical Beamwidth -°	25
VSWR	≤1.5
Impedance-Ω	50
Polarization	Vertical
Max.Power-W	50
Connector Type	N Female or Customization
Length-mm	3185
Weight-Kg	6.3
Pole Diameter-mm	φ40~50
Rated wind velocity-m/s	40
Mounting Way	Pole Mount

Installation sketch

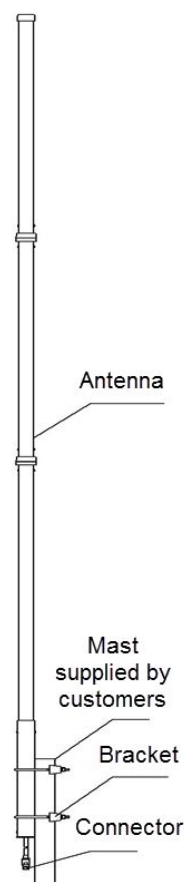

Kenbotong Technology Co., Ltd.

Addr : NO.2 Chanxiu Road ,Foshan city,Guangdong China Code:528061
Tel: 86(757)8202-5597, 8221-9788 Fax : 86(757)8221-2072,8802-2808
Email: kbt@kenbotong.com web: <http://www.kenbotong.com>