PRODUCT DATA SHEET





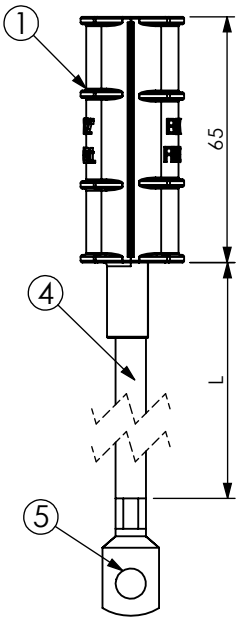





A) SPECIFICATIONS

1 *Plastic hinged shell: P.A.*
2 *Sealant Isobutylene strip*
3 *Inner Contact: tinned brass*
4 *16 sqmm Connection cable: L=500 PE 7 wires copper cable.*
5 *Cable lug Ø8: Tinned copper*

B) RESISTANCE TESTS

Waterproof test:
IP 68 (FIMO Test according to IEC60529 normative).
Contact Resistance </= 1mOhm
Maximum current handling : 100kA
Operating temperature : -40 °C + 130°C

C) PACKAGING INFORMATION

Packing: 1 pcs in a bag
10 bags in a box.
Label indicating:
product code, article, quantity, production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST 050

code	6115080012
article	EGK 1/2"

D	L		
16-17	500	10	0.135kg

RI	DATE	DR	DATE	AP
02				
01				
00	08/04/2015	G.S.	08/04/2015	A.V.
	1ST EMISSION			

Description:

No Tools Grounding Kit

FIMO
Setting Installation Standards

RoHS
Compliant. RoHS 2002/95/EC

Use:

Grounding kits for coaxial cables.

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.