
# BT-23-411

## SMA BIAS TEE

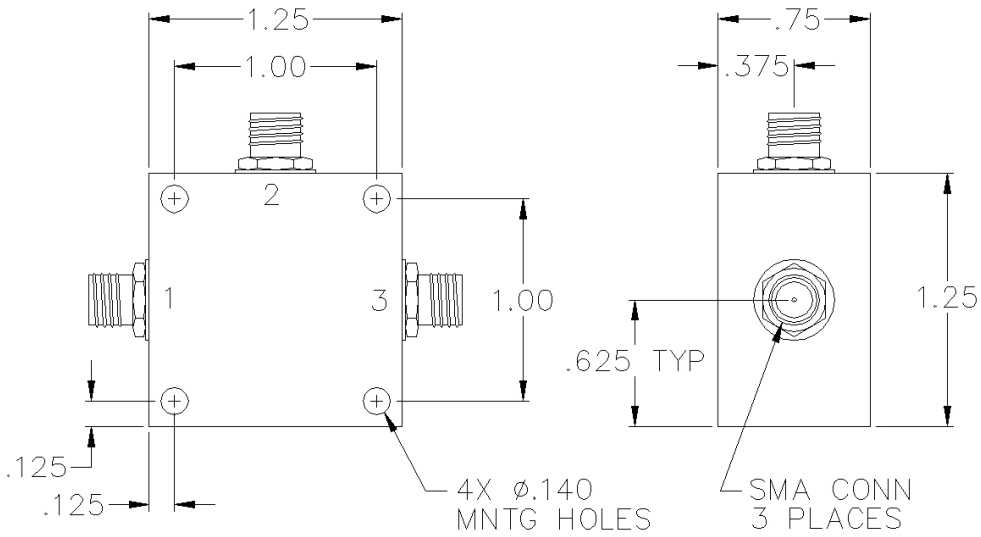


## SPECIFICATIONS

| | |
|---|---|
| Name: | BT-23-411 |
| Frequency Range: | 500-3000 MHz |
| Insertion Loss: | 1.8 dB max. |
| Current: | 2000 mA max. |
| Power: | 5 watts max. |
| Voltage: | 50 Vdc max. |
| Isolation: | 30 dB min. |
| VSWR: | 1.50:1 max. |
| Package Type: | SMA |

## PORT CONFIGURATION

| | |
|---|---|
| RF In (DC Blocked): | 1 |
| RF/DC Output: | 3 |
| DC In (Bias): | 2 |
| Ground: | Housing |

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 190404

PULSAR MICROWAVE CORPORATION

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com