
PRODUCT DATA SHEET

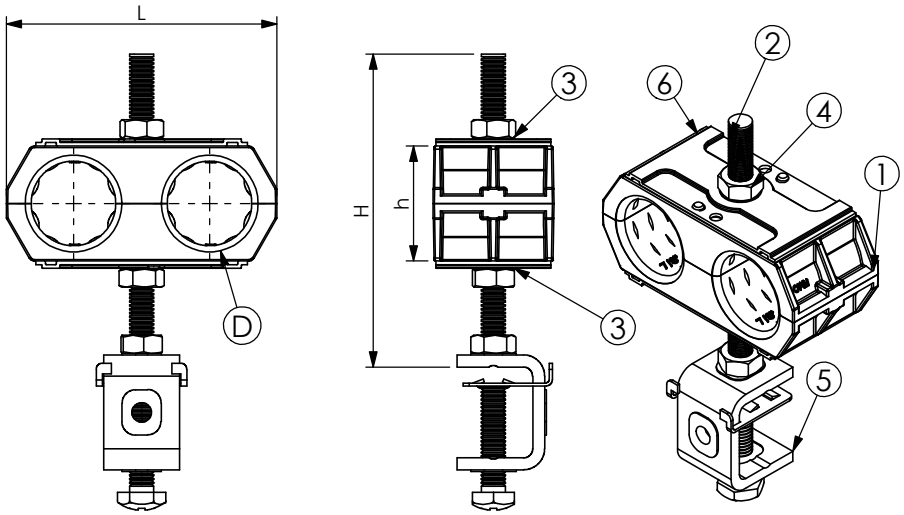

A) SPECIFICATIONS
1 *H.D.P.E. SAB duoble saddle*
2 *Stainless steel threaded bar BFI M8*
3 *Stainless steel elastic washer REI 8*
4 *Stainless steel hexagonal nut DAI 8*
5 *Stainless steel MIM clamp*
6 *Stainless steel pressure plate PRUC*

B) RESISTANCE TESTS
UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -50°C +80°C

C) PACKAGING INFORMATION
Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS
On request


CODE	ARTICLE	ø D	L	h	H	BOX	WEIGHT
61 1576 0209	UCM/ 2x9	8 - 9	56	75	21	20	170
61 1576 0211	UCM/ 2x11	10 - 11	56	75	21	20	170
61 1576 0213	UCM/ 2x13	12 -13	68	75	27	20	175
61 1576 0214	UCM/ 2x1/2"S (14)	13 - 14	68	75	27	20	175
61 1576 0238	UCM/ 2x3/8" (16)	15 - 16	68	75	27	20	175
61 1576 0212	UCM/ 2x1/2" (17)	16 - 17	68	75	27	20	175
61 1576 0258	UCM/ 2x5/8" (23)	21 - 23	90	100	38	20	230
61 1576 0278	UCM/ 2x7/8" (28)	27 - 28	90	100	38	20	230
61 1576 2118	UCM/ 2x1.1/8" (38)	36 - 38	114	150	54	20	230
61 1576 2114	UCM/ 2x1.1/4" (40)	39 - 40	114	150	54	20	275
61 1576 2148	UCM/ 2x1.5/8"S (49)	48 - 49	137	150	66	20	277
61 1576 2158	UCM/ 2x1.5/8" (52)	50 - 52	137	150	66	20	275

RI	DATE	DR	DATE	AP	Description:
02					Cable Clamps type UCO +MIM 8/25 without PRUC
01					
00	06/10/15	G.S.	06/10/15	A.V.	
	1ST EMISSION				

FIMO
Setting Installation Standards

RoHS

Use: *Fixing of 2 cables on flat 3-25 and round ø 8-25.*



FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.