

Waveguide to Coaxial Adapter AWR137NG

WR137 to N Female, Rectangular Grooved Flange, Right Angle



Rev 3

Electrical

Frequency Range	5.37-8.2 GHz
VSWR	1.2 max

Configuration

Waveguide Size	IEC	70
	EIA	WR137
Flange Type	IEC	PDR70
	North America	Al alloy: M3922/52-040(UG1357/U) Cu alloy: M3922/52-039(UG1356/U) CPR137G
Coax Connector	N Female	
Body Geometry	Right Angle	


Materials

Waveguide Body	Aluminum, black or grey painted
Connector Body	Passivated stainless steel
Center Contact	Gold plated beryllium copper

Mechanical & Environmental

Operating Temp	-40°C to 70°C
Connector Interface	MIL-STD-348
RoHS	Compliant

Typical Test Data

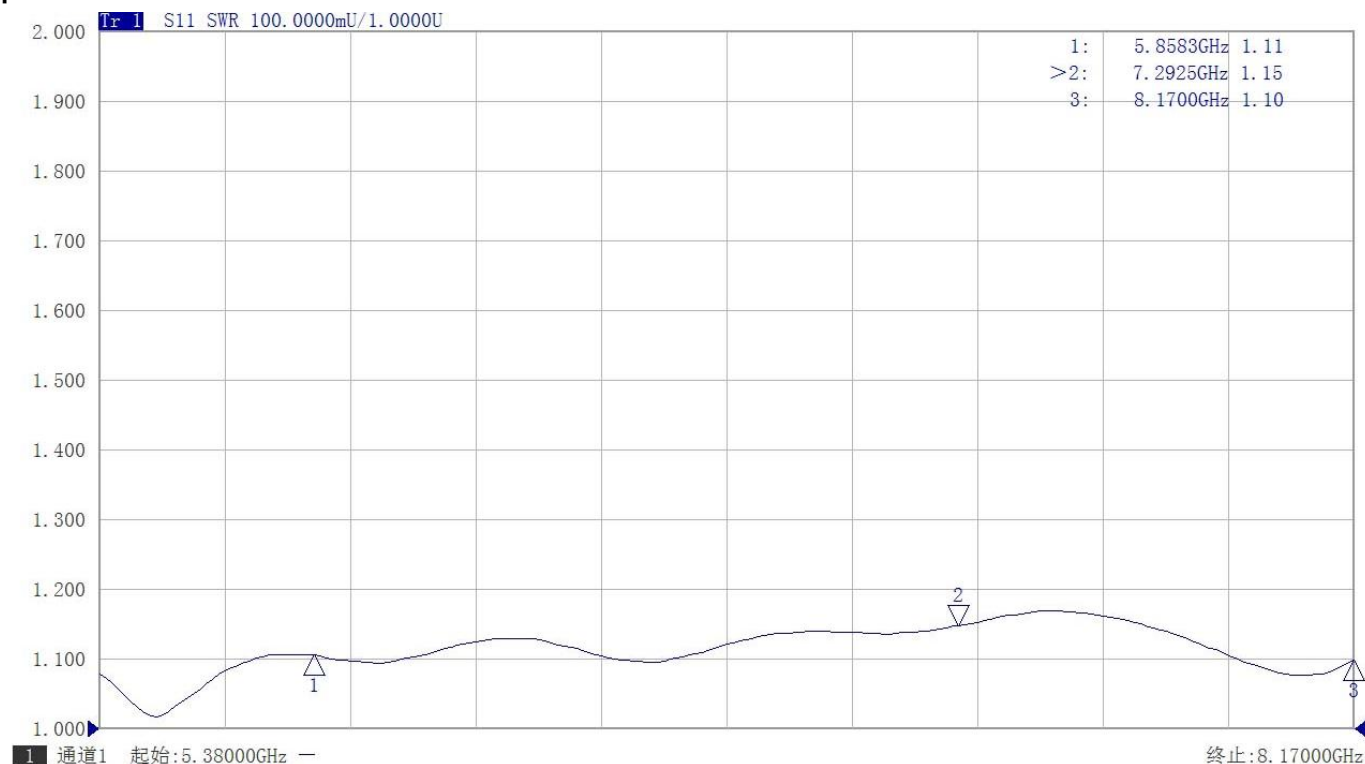


Waveguide to Coaxial Adapter AWR137NG

WR137 to N Female, Rectangular Grooved Flange, Right Angle




Rev 3

Dimensions(mm)

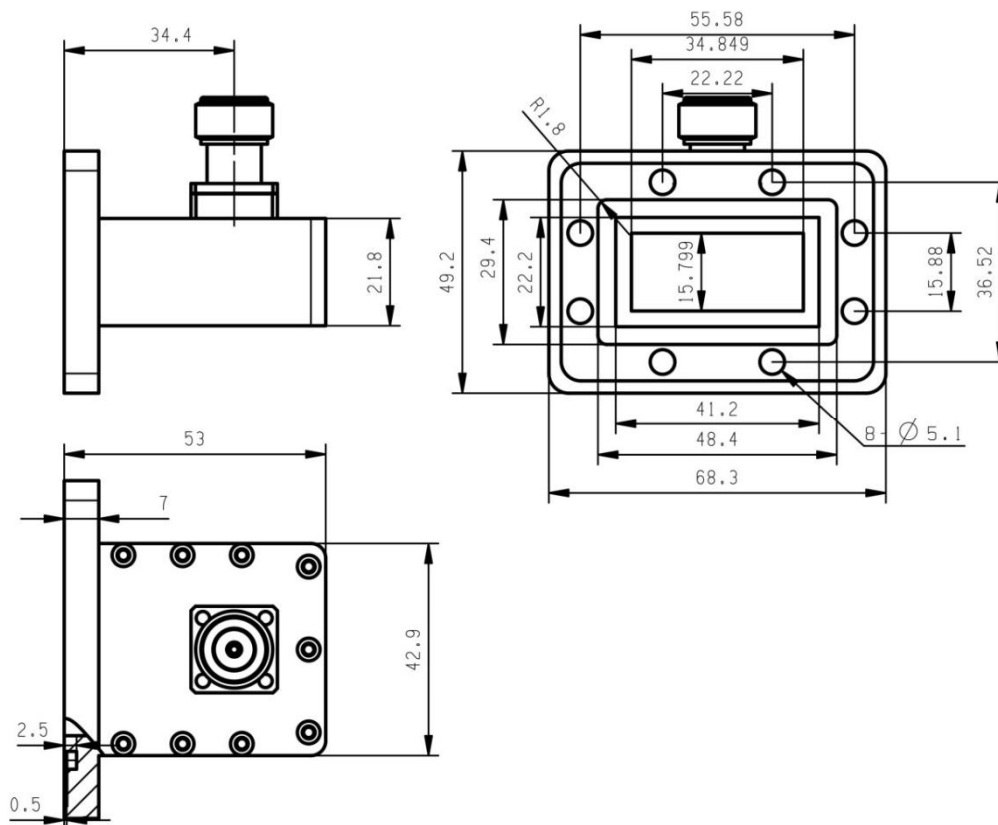

Flange Comparison (Unit mm)

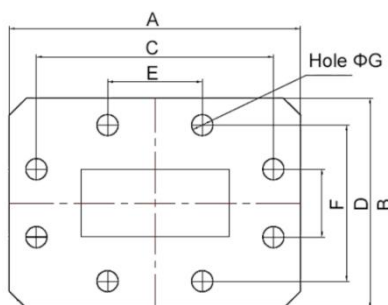

WG SIZE	CONFORMING STANDARD	A	B	C	D	E	F	G
WR137	RF ONE:AWR137NG	68.3	49.2	55.58	36.52	22.2	15.88	5.1
	IEC60154:PDR70	68.30	49.20	55.58	36.52	22.22	15.88	5.00
	USA:MIL3922/52-040(UG1357/U)	68.33	49.28	55.58	36.52	22.24	15.90	4.98
	USA:CPR 137G	68.26	49.21	55.58	36.52	22.22	15.88	5.03

* The purpose of this size comparison is to provide a quick overview of different flange standards.

* Great care has been given nevertheless there might be a few mistakes.

* Please check the flange compatibility before ordering. Customized flanges are available.