

TQJ-400W7T0

Fiberglass Omni Antenna

Technical Sheet



Applications

- 400MHz System
- TETRA System
- Multi-point Application


Features

- Superior Performance
- Fiberglass Radome
- All Weather Operation
- Stable Steel Installation Kit

Specifications

Model	TQJ-400W7T0
Freq.Range-MHz	400-435
Gain-dBi	7.2
Beamwidth-°	H:360 E:18
Electrical Downtilt-°	0
VSWR	≤2.0
Impedance-Ω	50
Polarization	Vertical
Max.Power-W	100
Lightning Protection	DC Grounded
Connector	N Female
Length-mm	2835
Weight-Kg	4.4(exclude the bracket)
Radome	Fiberglass
Pole Diameter-mm	Φ 50- Φ 70

Installation Sketch

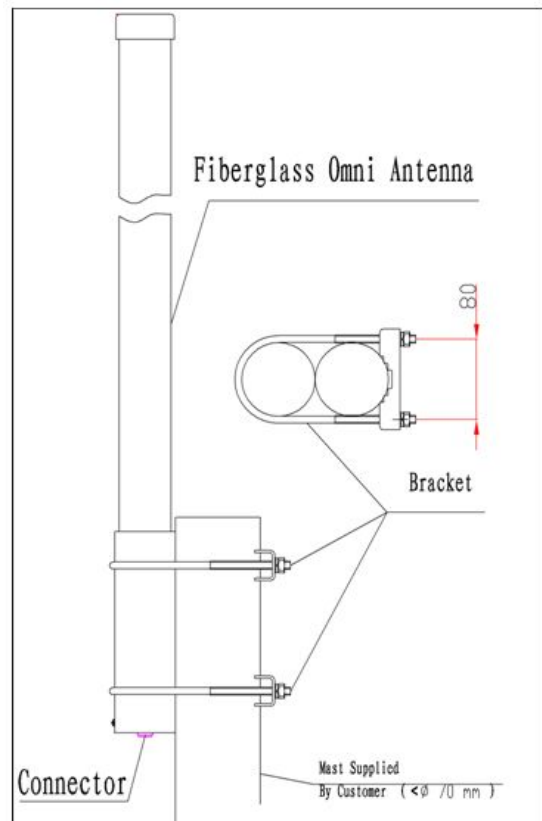

Kenbotong Technology Co., Ltd.

Addr : NO.2 Chanxiu Road, Foshan City, Guangdong China Code: 528061

Tel: 86(757)8202-5597, 8221-9788 Fax : 86(757)8221-2072, 8802-2808

Email: kbt@kenbotong.com web: <http://www.kenbotong.com>