PRODUCT DATA SHEET

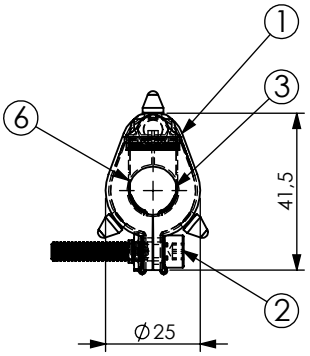

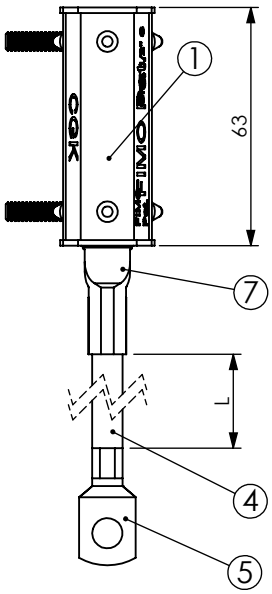



A) SPECIFICATIONS

1 *Shell: Stainless steel.*
2 *Hexagon socket head Screw: Stainless steel VCI 5x30*
3 *Gasket: Rubber EPDM.*
4 *16sqmm Connection cable: L=500 PE rigid copper cable.*
5 *Cable lug Ø8: Tinned copper.*
6 *Inner Contact: Tinned brass.*
7 *Contact bar: Tinned brass.*

B) RESISTANCE TESTS

Waterproof test:
IP 68 (FIMO Test according to IEC60529 normative).
Environmental Resistance Test: IEC 68-2-14
Salt Fog Test: UNI 9227
Contact Resistance </= 1mOhm
Operating Temperature -40°C +85°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity, production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IST 045

code	**6115090016**
article	**CGK 1/2"S M**

D	L		
13-14	500	10	0.3652kg

RI	DATE	DR	DATE	AP
02				
01				
00	17/12/2014	E.B.	17/12/2014	A.V.
	1ST EMISSION			

Description:
Grounding Kit

FIMO
Setting Installation Standards

RoHS
Compliant. RoHS 2002/95/EC

Use: *Earthing of coaxial cables.*

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.