


PRODUCT DATA SHEET

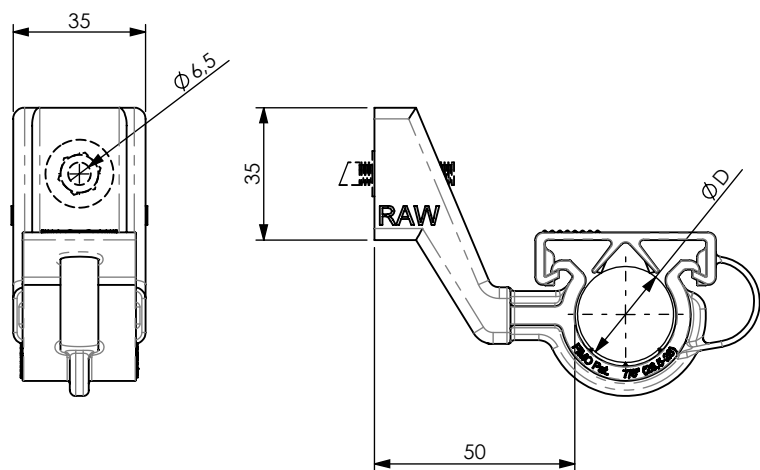

A) SPECIFICATIONS

1 Cable clamp. Material: PA6-VO, black colour, self extinguishing, halogen free (according to UL94-VO).

B) OPERATING TEMPERATURE


Working temperature : -40°C +125°C.
Installation temperature : -20°C +60°C.

C) DELIVERY MODALITIES

Packing in boxes. Label indicating: product code, article, quantity, production batch, FIMO logo and figure. (Customer code on request).

D) MOUNTING INSTRUCTIONS

IT043

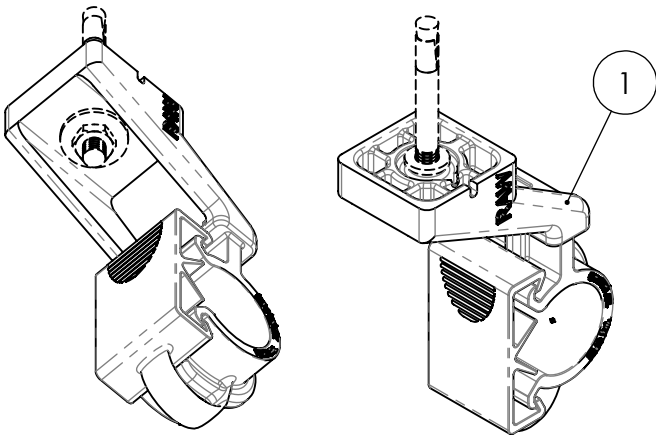

code	6150015078
article	RAW 7/8"-50

D		
26.5-28	50	0.0477kg

RI	DATE	DR	DATE	AP	<div>Description:</div> <div>RAW 7/8"-50 Radiating Cable Clamps</div>
02					
01					
00	05/12/2016	E.B.	05/12/2016	A.V.	
	1 ST EMISSION				
<div> Setting Installation Standards</div>				<div> RoHS</div>	<div>Use: <i>Horizontal or vertical installation of radiating cables in tunnel</i></div> <div><i>* Suitable for installation in high speed railway tunnel application (350 km/h)</i></div>