
PRODUCT DATA SHEET

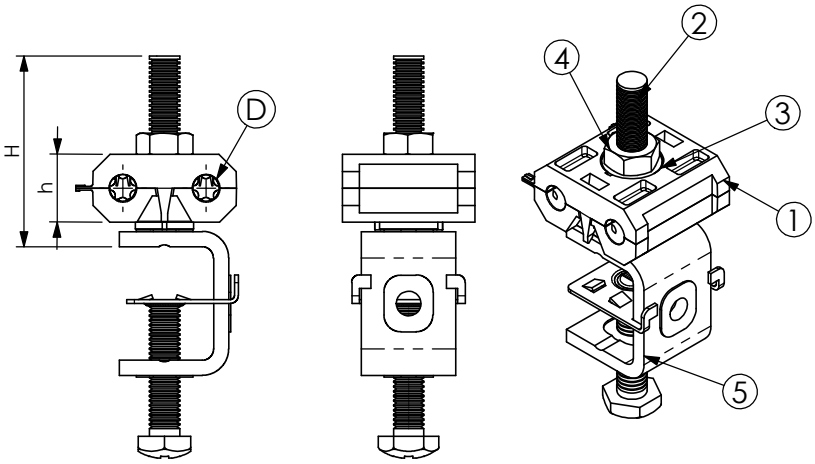

A) SPECIFICATIONS

1 *Calibrated double black saddles made in PA.66*
2 *Stainless steel threaded bar BFI M8*
3 *Stainless steel flat Washer RPI 8/16*
4 *Stainless steel hexagonal nut DAI 8*
5 *Stainless steel MIM 8 clamp*

B) RESISTANCE TESTS

UV Test BS-ISO 105-B06
Vibration test conforming to UNI 60068-2-6
Operating temperature: -30°C +120°C

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

On request

CODE	ARTICLE	ø D	h	H	BOX	WEIGHT
61 1570 0207	MCC 2x7	5 - 7	50	18.5	20	120
61 1570 0209	MCC 2x9	7 - 9	50	18.5	20	120
61 1570 0211	MCC 2x11	9 - 11	50	18.5	20	120
61 1570 0214	MCC 2x14	11 - 14	50	24	20	130
61 1570 0212	MCC 2x1/2"	14 - 17	50	24	20	126
61 1570 0220	MCC 2x20	17 - 20	50	33	20	153

RI	DATE	DR	DATE	AP
02				
01				
00	29/01/16	G.S.	29/01/16	A.V.
	1ST EMISSION			

Description:

MCC - *Mini clamps type MCO+MIM 8/25*

FIMO Setting Installation Standards

RoHS

Use:

Fastening of 2 cables on flat iron with holes

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.