PRODUCT DATA SHEET

Connecting cable

A) MATERIAL

Contact: Tin Plated Copper
Connecting cable: P.E. Insulated Copper
According to CEI 20-22.
Colour: Black
M8 screws: Stainless Steel

B) ACCEPTANCE TEST

Visual and dimensional control on samples

C) PACKAGING INFORMATION

Packing in boxes.
Label indicating:
product code, article, quantity,
production batch,
FIMO logo and figure.
(Customer code on request).

FMT

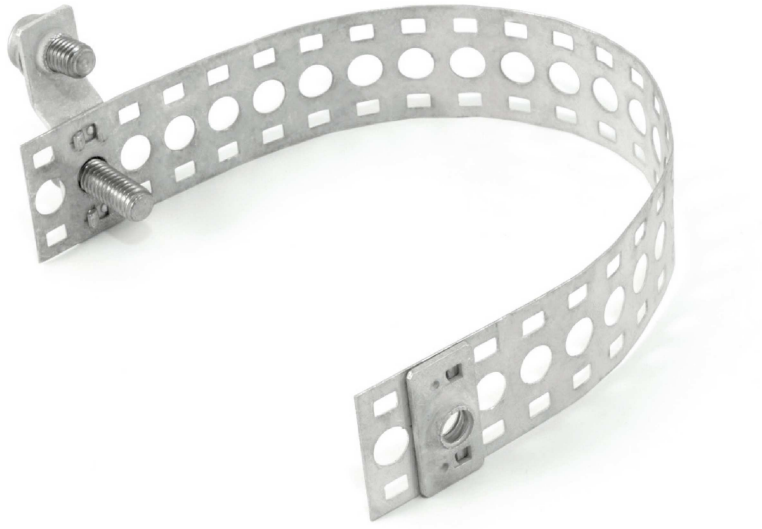

CODE	ARTICLE	DESCRIPTION	FOR CONNECTORS	øD	BAG	BOX	WEIGHT
61 1503 1580	**FMT 15/80**	Punched tinned copper strip 30x0,5, adjustable length	1/4" - 2.1/4"	15-80	10	100	170

RI	DATE	DR	DATE	AP
02				
01				
00	29/01/16	G.S.	29/01/16	A.V.
	1ST EMISSION			

Description:

FMT - Grounding Kits

Complete with 16 mm2 connecting cable.
Lightning test according to standard IEC 61312-1 grade III (CESI).

FIMO® Setting Installation Standards

RoHS compliant · RoHS 2002/95/EC

FI.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright FI.MO.TEC. S.p.a. All rights reserved.