Waveguide Termination

WT51S

WR51, 14.5-22.0 GHz, 20 Watts, MIL3922/70-022 Flange

Rev 1

Electrical

Impedance	50 ohm
Frequency Range	14.5-22.0 GHz
VSWR	1.2 max
Input Avg Power	20 Watts @ 25℃
Operating Temperature	-40℃~+70℃

Mechanical

Waveguide Size	WR51(R180)
Flange Type	MIL3922/70-022
Waveguide Material	Aluminum
Waveguide Finish	Grey painted

Dimensions(mm)

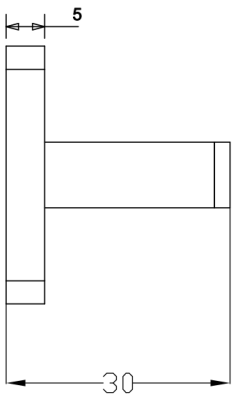

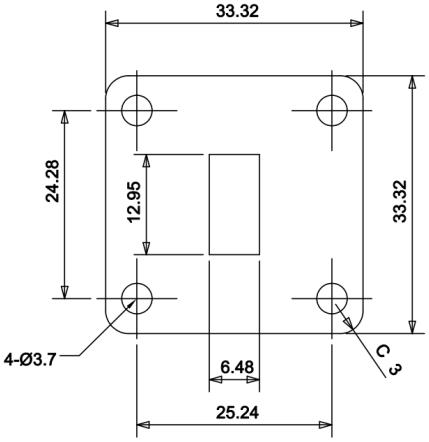

Waveguide Termination

WT51S

WR51, 14.5-22.0 GHz, 20 Watts, MIL3922/70-022 Flange

Rev 1
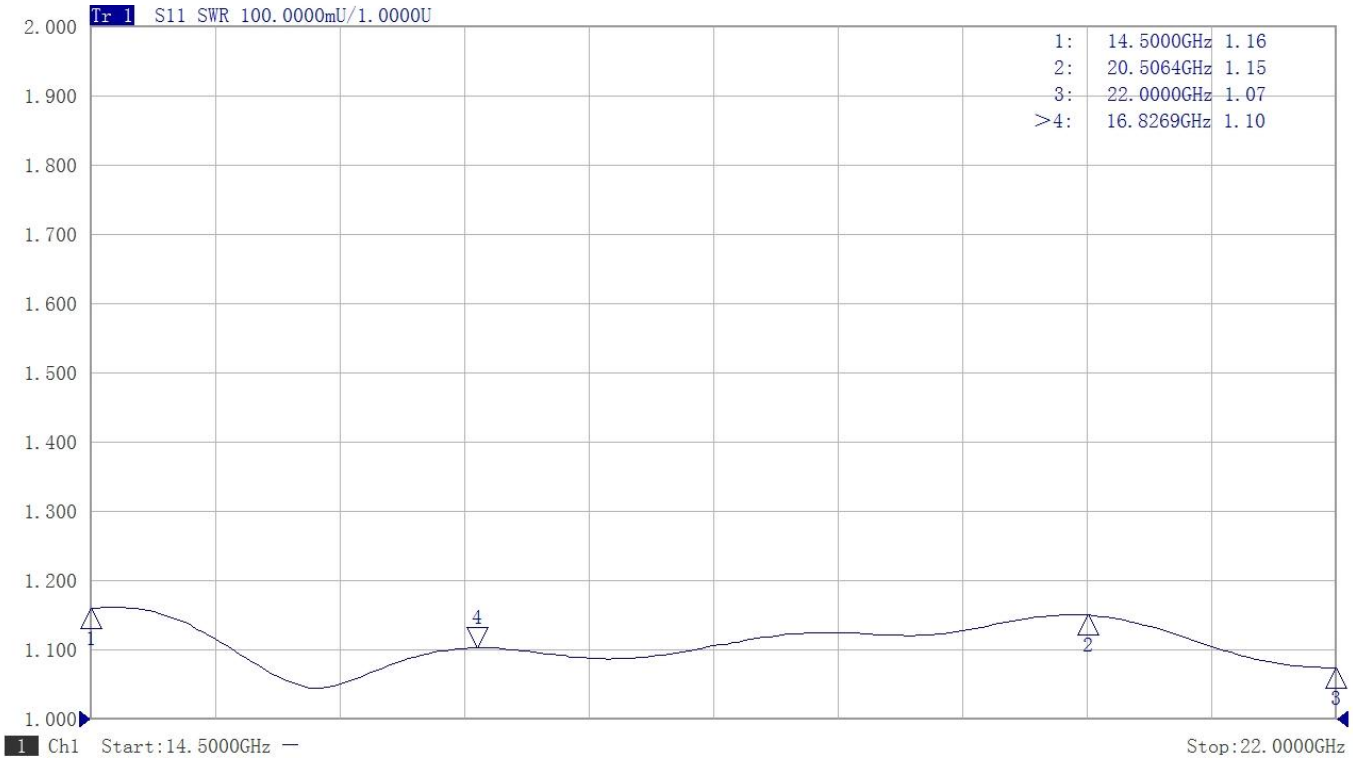
Typical Test Data