
# CS08-15-436/13

## 8 DB SMA DIRECTIONAL COUPLER



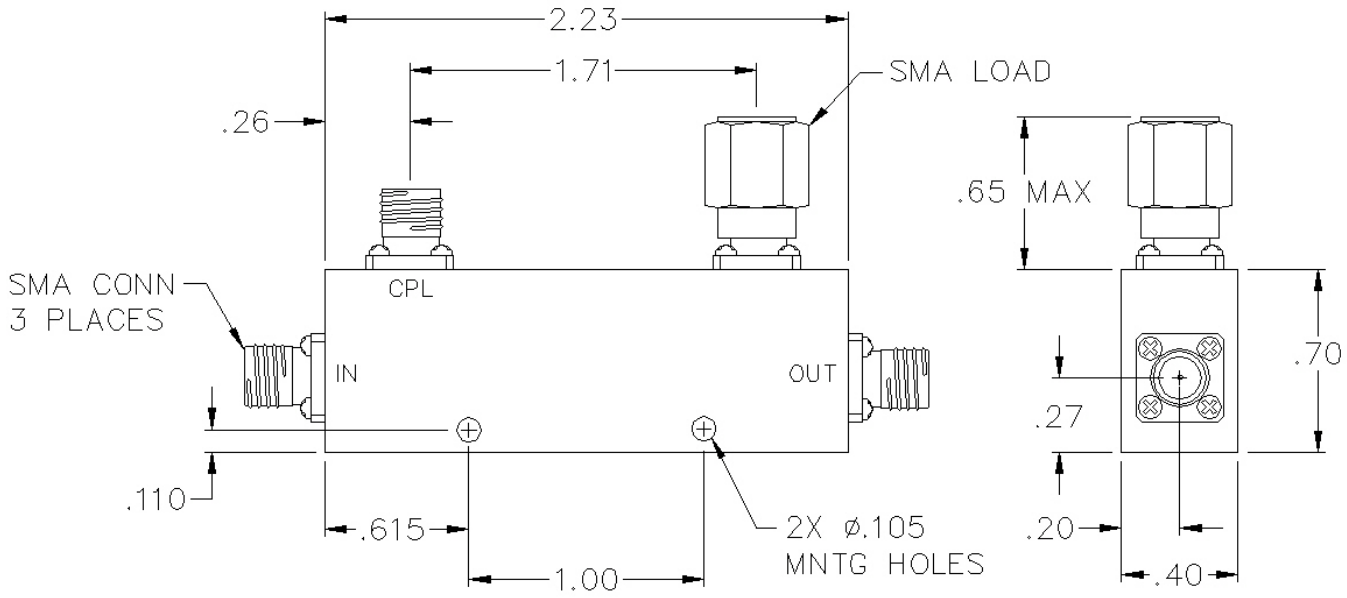


## SPECIFICATIONS

| | |
|---|---|
| Name: | CS08-15-436/13 |
| Frequency Range: | 2-18 GHz |
| Coupling: | 8.0 ± 1.00 dB |
| Coupling Flatness: | ±0.50 dB max. |
| Insertion Loss: | 0.90 dB max. |
| Directivity: | 2.0-12 GHz: 15 dB min.<br>12-18 GHz: 12 dB min. |
| VSWR: | 1.50:1 max. |
| Input Power: | 50 watts max. |
| Reflected Power: | 4 watts max. |
| Connector Type: | SMA |

Insertion loss does not include coupling loss.
Input power is specified for load VSWR better than 1.20:1.

This is a commercial off the shelf (COTS) product.
For an equivalent product that meets DFARS materials compliance, contact sales.
All specifications are subject to change without notice at any time. Rev: 170130

PULSAR MICROWAVE CORPORATION

www.pulsarmicrowave.com · 48 Industrial St West, Clifton NJ 07012 · Tel: 973-779-6262 · Fax: 973-779-2727 · sales@pulsarmicrowave.com