
Data Sheet

HUBER+SUHNER

Coaxial Panel Connector
23_SMA-50-0-2/111_N

Description

Straight panel receptacle jack, flange mount

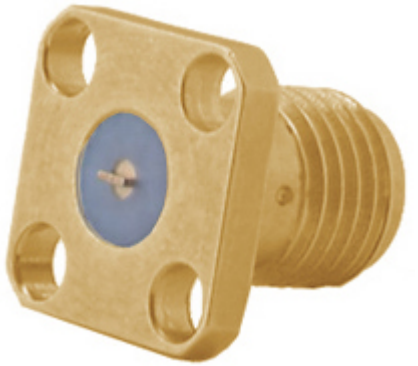

Interface standards
IEC 60169-15_MIL-STD-348A/310_CECC 22110

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	18 GHz

Mechanical Data

Number of matings	500
Weight	0.0027 kg

Environmental Data

Operating temperature	-65 °C to 125 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Body	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	

Related Documents

Catalogue drawing	DCA-00010571

Ordering Information

Single package	23_SMA-50-0-2/111_NE

Waiver: It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general information purposes only.

Document: DOC-0000188578 O / PDO C / date of publication: 27.03.2020 16:23:43 / uncontrolled copy