


FLC-FLC-A200_UP

Description

FLC adaptor, MM / OM3 / OM4, PC, beige, simplex, without flange

Features

- Two connections in one SC-shaped adaptor
- One-piece design for highest precision
- Integrated fixing spring
- Ceramic sleeves

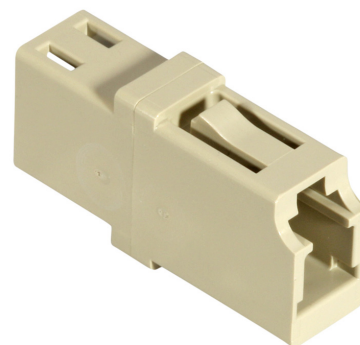

Technical Data

General Data

Characteristics	Values
Specified acc. to	IEC 61754-20, TIA 604-10-A
Adaptor family	LC
Adaptor type	MM PC
Weight in kg	0.0029
Material	Plastic
Color of housing	Beige

Mechanical Data

Characteristics	Values
Operating temperature min. (°C)	-40
Operating temperature max. (°C)	85
Min. mating cycles	1000

Optical Data


Characteristics	Values
-----------------	--------

Environment Data

Characteristics	Values
RoHS compliant	Yes
REACH compliant	Yes
UV resistant	Yes
Flammability rating	UL 94 V-0

FLC-FLC-A200_UP

Technical drawing

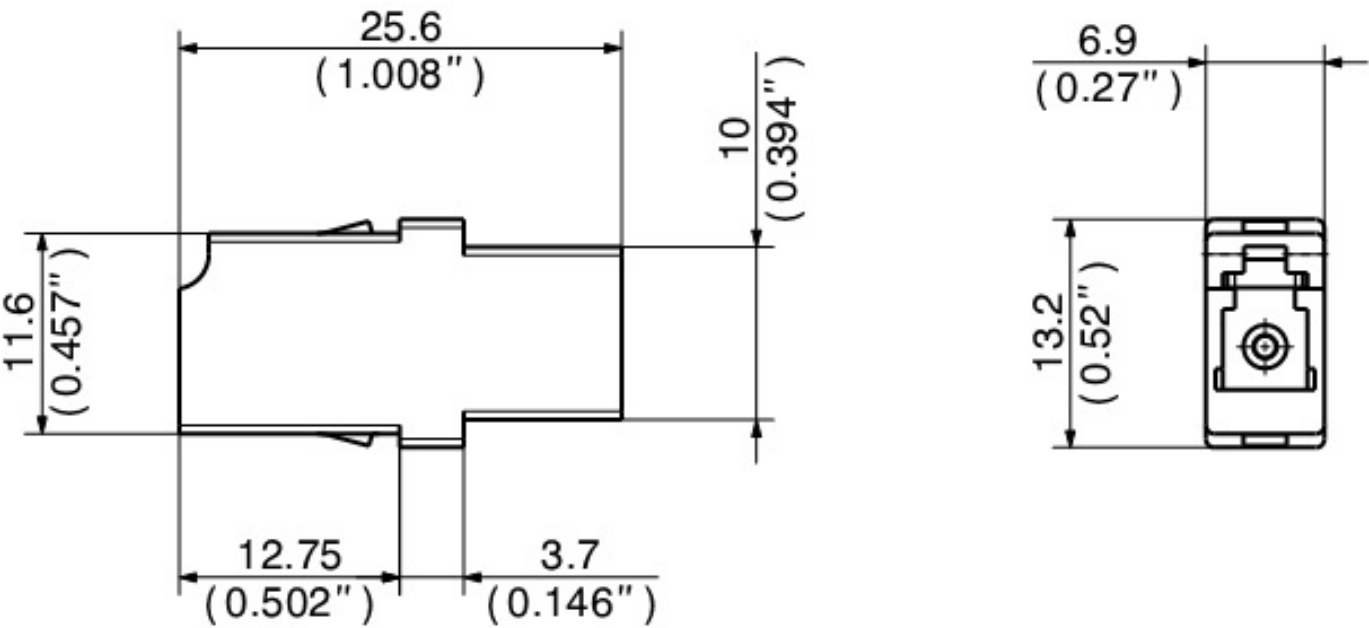

Ordering information

Description	Item number
FLC-FLC-A200_UP	23038612