

FST -FCPC-C100

Description

ST-FC adaptor, SM, UPC, APC, metal, simplex, wide key

Features

- Hybrid adaptor ST-FC
- Wide key
- ST: IEC 61754-2, TIA 604-2
- FC: IEC 61754-13, TIA 604-4-A



Technical Data

General Data

| Characteristics | Values |
|------------------|-------------|
| Adaptor family | ST FCPC |
| Adaptor type | SM UPC/APC, |
| Weight in kg | 0.0071 |
| Material | Metal |
| Color of housing | Metal |

Mechanical Data

| Characteristics | Values |
|---------------------------------|--------|
| Operating temperature min. (°C) | -40 |
| Operating temperature max. (°C) | 85 |
| Min. mating cycles | 1000 |

Optical Data


| Characteristics | Values |
|-----------------------|--------|
| IL repeatability (dB) | 0.1 |

Environment Data

| Characteristics | Values |
|---------------------|-----------|
| RoHS compliant | Yes |
| REACH compliant | Yes |
| UV resistant | Yes |
| Flammability rating | UL 94 V-0 |
| Free of halogen | Yes |

FST -FCPC-C100

Technical drawing

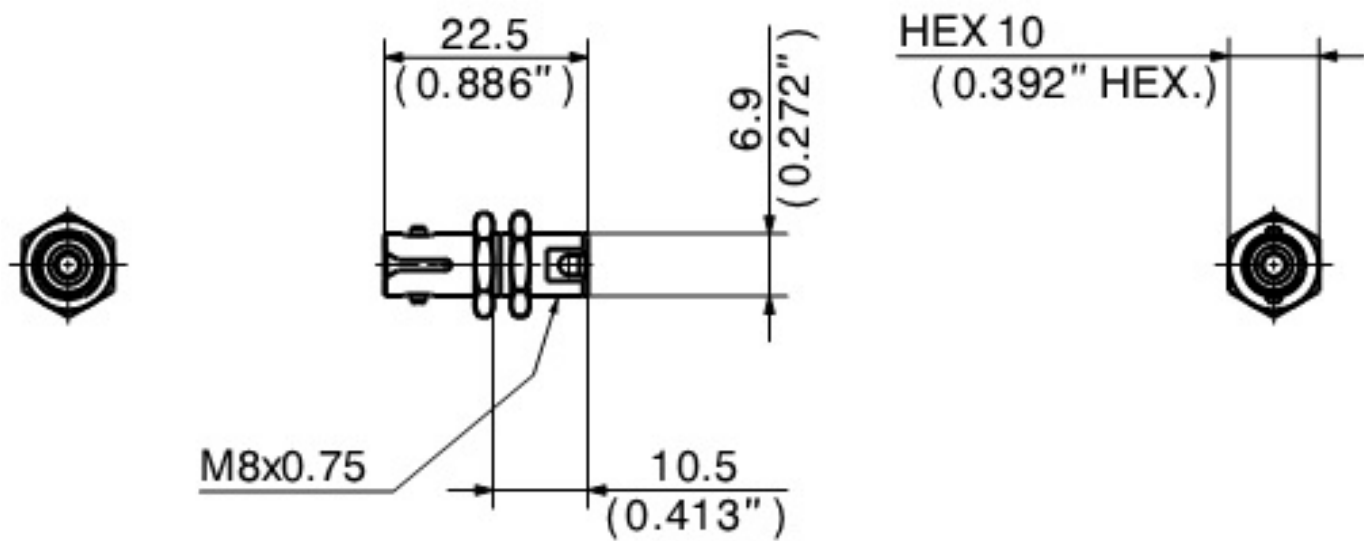

Ordering information

| Description | Item number |
|----------------|-------------|
| FST -FCPC-C100 | 22649103 |