


ATEX certified, 0 dBd, Omnidirectional Base Station for
the 450 MHz Band in Hazardous areas

DESCRIPTION

- CXL 450-1LW-SS-Ex is a 0 dBd, vertically polarized, omnidirectional base station antenna which covers the 380 - 510 MHz band in three models.
- The antenna is specified as an ATEX antenna for use in zone 2 in potentially explosive areas.
- Before installing the antenna, please read the ATEX Product Manual carefully.
- The antenna is suitable for use in gas groups IIA, IIB and IIC in zone 2.
- It's only necessary to install an ATEX grounding Kit on the LW-SS-Ex bracket, when the point of installation has a different electrical potential than the system.
- The carefully designed, broadbanded ½ λ-dipole radiating element is made of brass tube and sealed in a high-quality cylindrical glass fibre tube with low wind-load.
- The accompanying U-bolts and fittings are made of stainless steel.
- The antenna element is sealed in a high-quality glass fibre tube.
- All metal parts in the antenna are DC-grounded. Consequently, the antenna shows a DC-short across the coaxial cable.

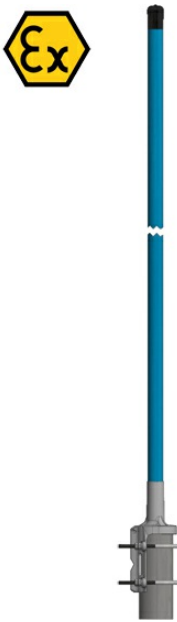

ORDERING


Model	Product No.	Frequency
CXL 450-1LW-SS-Ex/l	115000010	380 - 430 MHz
CXL 450-1LW-SS-Ex/h	115000011	420 - 470 MHz
ATEX grounding Kit	115000100	

SPECIFICATIONS

Electrical		
Model	CXL 450-1LW-SS-Ex	
Frequency	50 MHz wide frequency segments within 380 - 510 MHz. See ordering designations	
Antenna Type	Coaxial dipole, broad-banded	
Polarisation	Vertical	
Pattern Type	Omnidirectional	
3 dB Beamwidth, E-Plane	80 °	
3 dB Beamwidth, H-Plane	Omnidirectional	
Impedance	50 Ω	
Gain	0 dBd (2.2 dBi)	
VSWR	< 1.5:1	
Bandwidth	50 MHz	
Antistatic Protection	All metal parts DC-grounded (Connector shows a DC-short)	
HCM Code(s)		
Mechanical		
Connector Torque	N-female 0.7 - 1.1 Nm	
Materials	Radome: Polyurethane-coated glass fibre Mounting bracket: Stainless acid-proof steel (AISI 316) U-bolt and fittings: Stainless steel (AISI 316)	
Installation Torque	On 16 to 54 mm / 0.63 - 2.13 in. dia. mast tube - 3 Nm	
Colour	Blue (RAL +5015)	
Wind Area	0.029 sq. m / 0.31 sq. ft	
Wind Load	33.6 N (160km/h)	
Diameter	25.5 mm / 1.00 in.	
Height	1050 mm / 41.34 in.	
Weight	1.45 kg / 3.20 lb	
ATEX Marking	II 3G Ex nA IIC T6	
Environmental		
Operating Temperature Range	-30°C to +60°C	-30°C to +60°C
Survival Wind Speed	200 km/h	
Ingress Protection	IP66	

ADDITIONAL DATA

*See the ATEX Product Manual (safety and mounting instructions) and related EU DECLARATION OF CONFORMITY ATEX Directive 2014/34/EU.

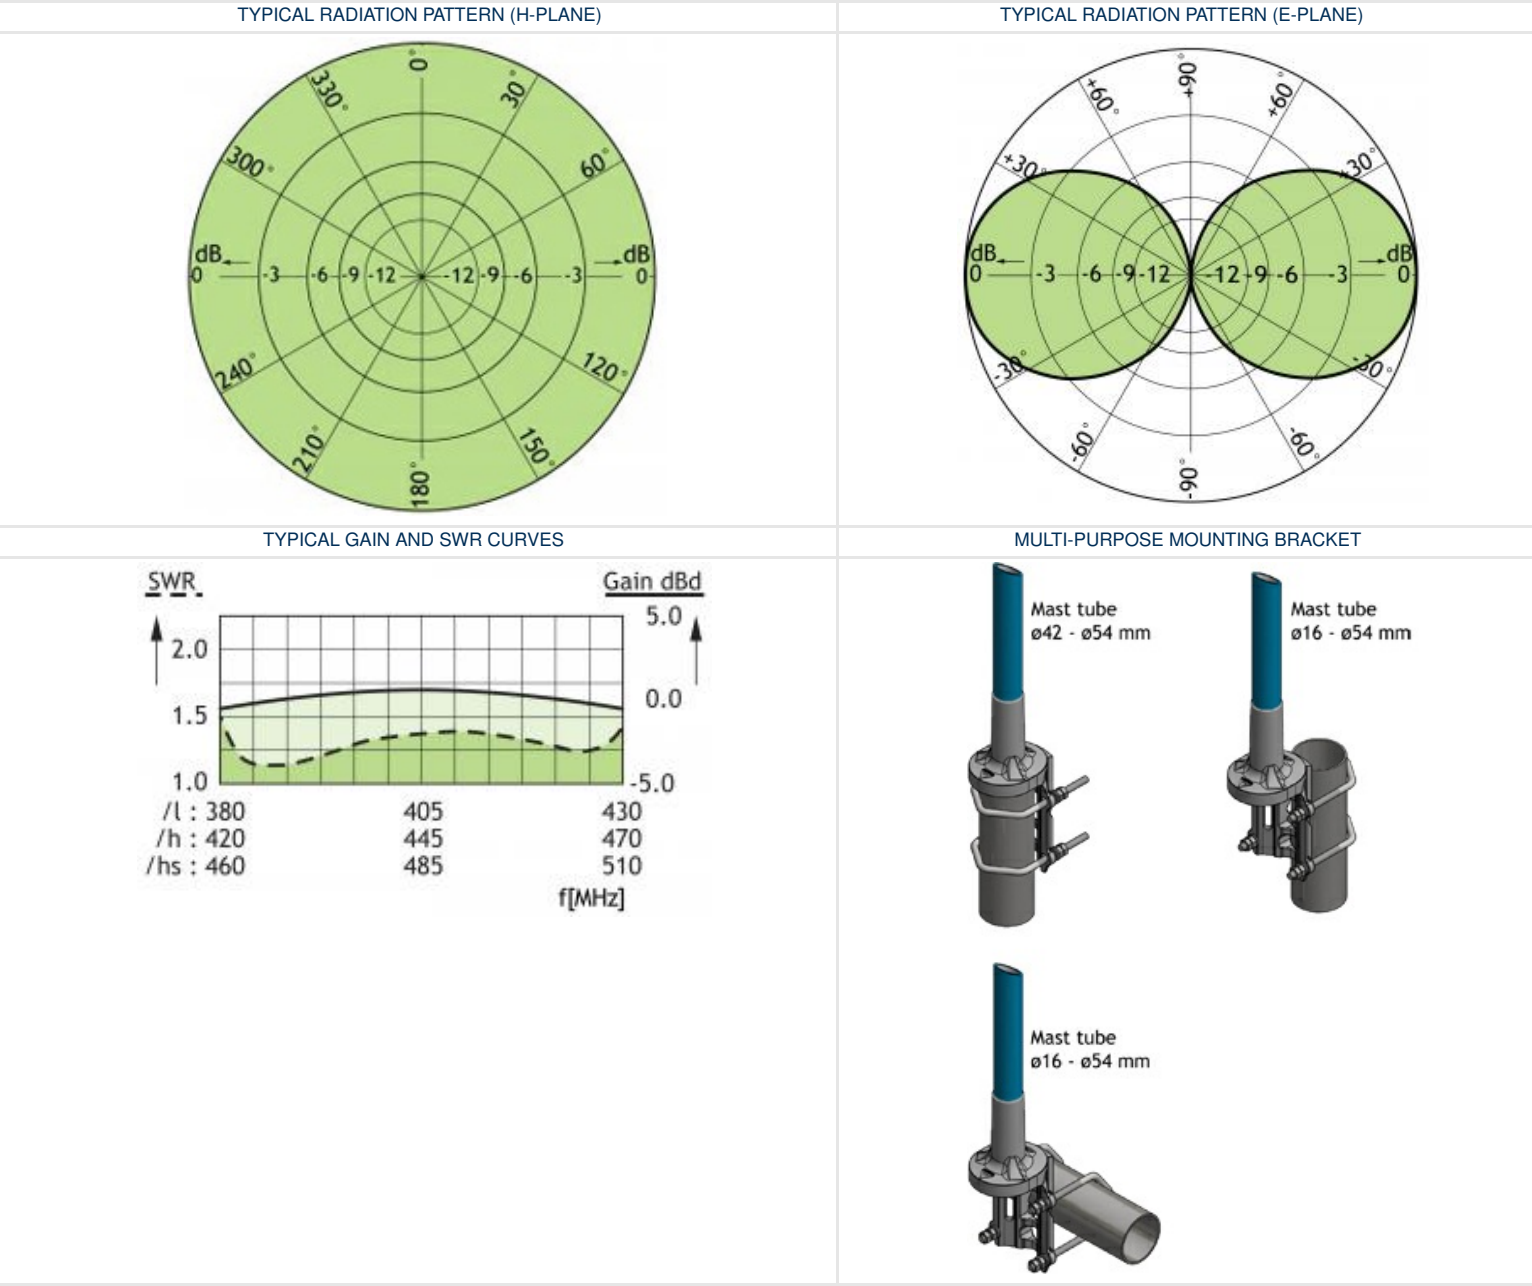

CALCULATION OF MAX. ANTENNA INPUT POWER IN DIFFERENT ATEX GROUPS

ATEX GROUP	MAX. EIRP POWER	ANTENNA GAIN	MAX INPUT POWER
I/A	37.7 dBm (6.0 W)	0 dBd / 2.15 dBi	35.6 dBm (3.6 W)
I/B	35.4 dBm (3.5 W)	0 dBd / 2.15 dBi	33.3 dBm (2.1 W)
I/C	33.0 dBm (2.0 W)	0 dBd / 2.15 dBi	30.8 dBm (1.2 W)