

# Coaxial Fixed Attenuator

**RFHB04XXNC2**

DC-4 GHz, 1-60 dB, 2 Watts, N, Bidirectional



Rev 3

## Electrical

Impedance	50 ohm					
Frequency Range	DC-4 GHz					
VSWR	1.15 max					
Input Avg Power	2W@ 25℃ ambient, derating linearly to 0.2W at 100℃					
Peak Power	250W (5 micro-sec pulse width, 0.4% duty cycle)					
Direction	Bidirectional, N female to N male (other configurations available)					
Attenuation(dB)	1-10	20	30	40	50	60
Accuracy(dB)	±0.4	±0.5	±0.6	±0.7	±0.7	±0.8


## Mechanical

Connector Body	Ternary alloy plated brass
Heat Sink	N/A
Center Contact	Gold plated beryllium copper/brass
Net Weight	About 55 g

## Environmental

Operating Temperature	-55℃ to 100℃
Storage Temperature	-55℃ to 125℃
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/℃

## Dimensions(mm)

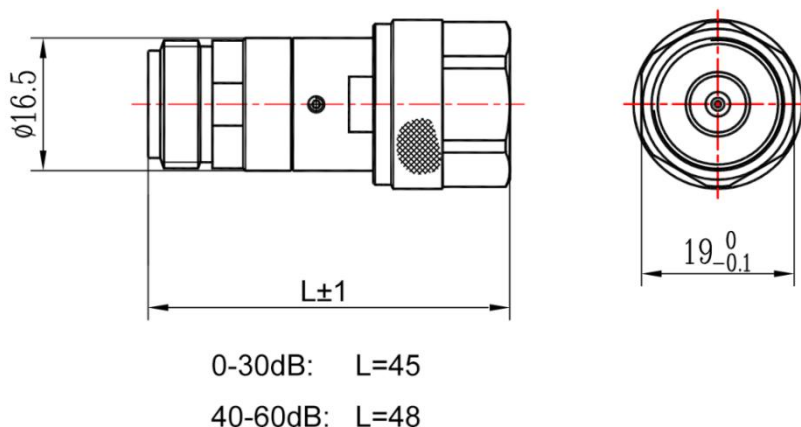

## Notes

1.Customized dB values, outlines and optimal accuracy/VSWR available.

## Model Description

### RFHB04XXNC2

1.XX for dB value: 06=6dB,30=30dB

2.Code for connector configuration:

A=female for two ends; B=male for two ends

C=female for one end and male for the other.