

# Coaxial Fixed Attenuator

**RFHB06XXBC25**

DC-6 GHz, 1-50 dB, 25 Watts, BNC, Bidirectional



Rev 3

## Electrical

Impedance	50 ohm				
Frequency Range	DC-6 GHz				
VSWR	1.25 max				
Input Avg Power	25W@ 25°C ambient, derating linearly to 2.5W at 100°C				
Peak Power	1kW (5 micro-sec pulse width, 1% duty cycle)				
Direction	Bidirectional, BNC female to BNC male (other configurations available)				

Attenuation(dB)	1-10	20	30	40	50
Accuracy(dB)	±0.5	±0.6	±0.8	±0.8	±0.8


## Mechanical

Connector Body	Ternary alloy plated brass
Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper/brass
Net Weight	About 160 g

## Environmental

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/°C

## Dimensions(mm)

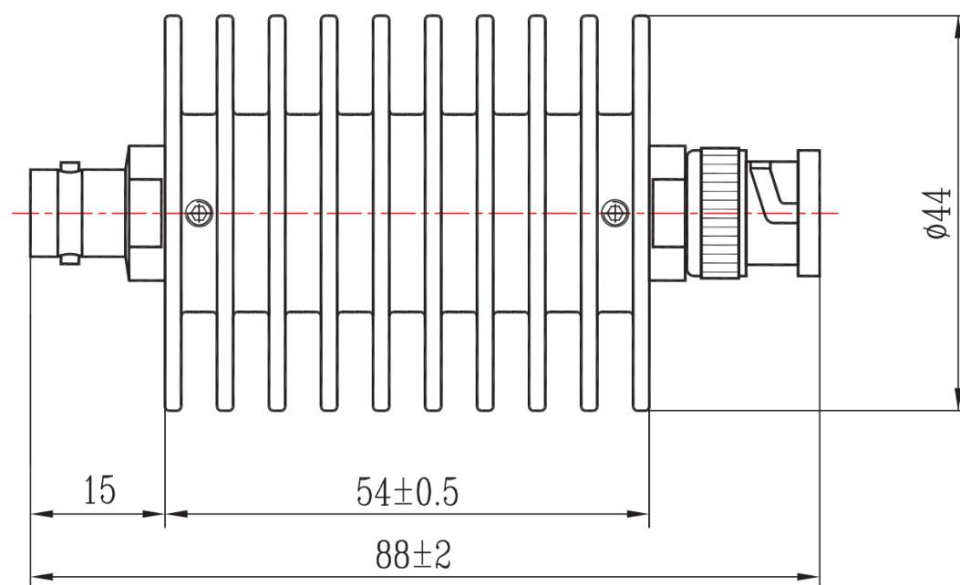

## Notes

- 1.To maintain best performance, recommended to use fan to keep the case temperature under 85°C.
- 2.Customized dB values, outlines and optimal accuracy/VSWR available.

## Model Description

### RFHB06XXBC25

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:  
A=female for two ends; B=male for two ends  
C=female for one end and male for the other.