

Wideband Ground-Air omni, 3 dBd, 225-400MHz

DESCRIPTION

The 470 Series of glassfibre omni antennas are designed for wide band, particularly military and ground-to-air applications. The antennas are well suited to the most demanding applications both physically and environmentally, and have been engineered for optimal performance over a bandwidth greater than 50% of their centre frequency. Available in single dipole, multidipole and colinear versions.

- Former Skymasts brand product.

SPECIFICATIONS

Electrical	
Frequency	225 - 400 MHz
Max. Input Power	500 W
Omni Deviation	< ± 1 dB
Polarisation	Vertical
3 dB Beamwidth, E-Plane	40 °
3 dB Beamwidth, H-Plane	Omnidirectional
Impedance	50 Ω
Gain	3 dBd (5.2 dBi)
VSWR	< 2.0:1
Antistatic Protection	All metal parts DC-grounded (Connector shows a DC-short)

Mechanical	
Radiating Element(s)	120 mm dia. aluminium tube
Connection(s)	N(f)
Radiator Feed	PTFE dielectric coaxial cable
Radome Material / Colour	GRP tube dark green, 128mm dia.
Length	2000 mm / 78.74 in.
Wind Area	0.256 sq. m / 2.76 sq. ft
Wind Load	324 N (160km/h)
Weight	9 kg / 19.84 lb
Mounting	Integral base clamp mounts directly to 50 mm dia. pole
Nato Stock No.	5985-99-667-6432

Environmental	
Survival Wind Speed	270 km/h


ORDERING

Model	Product No.	Frequency
Wideband Ground-Air omni, 3 dBd, 225-400MHz	470.32.05.00	225 - 400 MHz




DIAGRAM

RADIATION PATTERNS

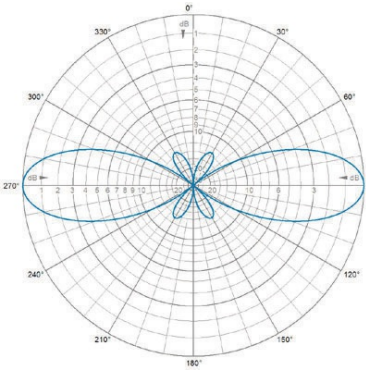

E-Plane | 312 MHz

RADIATION PATTERNS

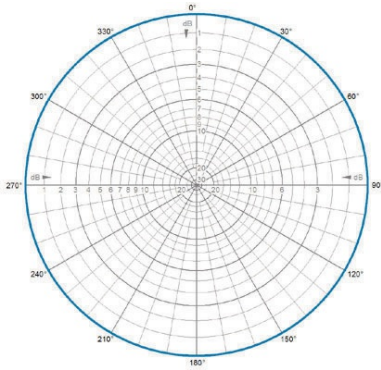

H-Plane | 312 MHz