


1 x 2/2 x 2 all band FBT coupler singlemode

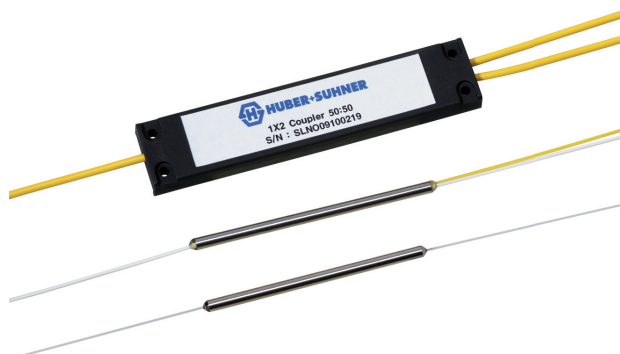

Features

- Fiber based splitter for all wavelength bands
- Low excess loss
- Low polarisation dependent loss (PDL)
- Excellent mechanical and environmental performance
- Telcordia GR-1209/GR-1221

Applications

- Telecommunication networks
- CATV networks data communication
- Network monitoring

Generic specifications*

Parameter	Unit	50/50	40/60	30/70	20/80	10/90	05/95	01/99
Operating wavelength	nm	1260 to 1625						
Insertion loss	dB	≤ 4.0	≤ 5.3/3.3	≤ 6.7/2.5	≤ 8.8/1.8	≤ 12.2/1.2	≤ 15.5/0.9	≤ 23.5/0.75
Uniformity **	dB	≤ 0.6/1.6	n/a					
PDL	dB	≤ 0.2						
Return loss	dB	≥ 55						
Directivity	dB	≥ 55						
Operating temperature	°C	−40 to +85						
Package dimension (Ø x L or L x W x H)	mm	Ø 3.0 x 54			Ø 3.0 x 54		85 x 18 x 6.5 or 90 x 20 x 10	
Input/output tail type	–	250 µm bare fiber			0.9 mm loose tube		0.9 mm loose tube or 2.0 mm cable	

* Without connector loss

**Uniformity ≤ 0.6 dB at center wavelengths 1310 nm, 1490 nm and 1550 nm, ≤ 1.6 dB over operating wavelength 1260 nm to 1620 nm

Order code

1	2	-	3	4	5	6	-	7	8	-	9	10	-	11	-	12	/	13	-	14	15
---	---	---	---	---	---	---	---	---	---	---	---	----	---	----	---	----	---	----	---	----	----

1	Splitter type
F	Fiber based splitter

2	Number of ports
1002	1 x 2
2002	2 x 2

3	Case type
D	Standard plastic hard case (with 0.9 mm loose tube or 2.0 mm cable)
E	Tubular case (with 250 µm bare fiber)
F	Tubular case (with 0.9 mm loose tube)

4	Operating wavelength
A	1260 to 1620 nm

5	Fiber type – splitter quality grade
A	Singlemode 9/125 µm – standard splitter grade

6	Splitting ratio
A	50:50
B	40:60
C	30:70
D	20:80
E	10:90
F	05:95
G	01:99

7	Lead type on input port
8	Lead type on output port
1	250 µm bare fiber (with tubular case code E only)
2	0.9 mm loose tube (with tubular case code F or standard plastic case code D)
3	2.0 mm cable (with standard plastic case code D only)

9	Lead length on input port
10	Lead length on output port
05	0.5 m
06	0.6 m
07	0.7 m
08	0.8 m
09	0.9 m
10	1.0 m
...	...
30	3.0 m

11	Ribbon length
00	No fan-out

12	Connector type on input port
13	Connector type on output port
	No connector available if input/output port with 250 µm bare fiber
00	No connector
30	FC
33	FC APC wide key
34	FC APC small key
70	SC
73	SC APC 8°
74	SC APC 9°
80	LX.5
83	LX.5 APC
85	LC ≤ 1.0 mm
8P	LC push-pull
86	LC APC ≤ 1.0 mm
8Q	LC APC push-pull
90	LSH
93	LSH APC

14	Connector quality grade on input port
15	Connector quality grade on output port
	No connector available if input/output port with 250 µm bare fiber
K	No connector
A	Singlemode LanEco APC
N	Singlemode LanEco UPC