


Coaxial Cable Connector 16_TNC-50-3-13/133_N

Description

Right angle cable plug

Interface standards

IEC 60169-17_MIL-STD-348A/313_CECC 22200

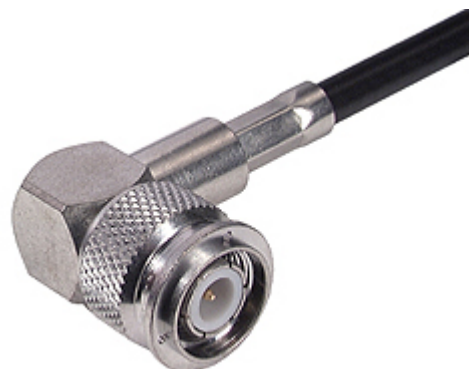

Technical Data

Electrical Data

| | |
|--------------------------|-------------|
| Impedance | 50 Ω |
| Interface frequency max. | 11 GHz |

Mechanical Data

| | |
|----------------|-----------|
| Centre contact | crimped |
| Outer contact | crimped |
| Weight | 0.0301 kg |

Environmental Data

| | |
|--|------------------|
| Operating temperature | -65 °C to 165 °C |
| 2011/65/EU (RoHS - including 2015/863 and 2017/2102) | compliant |

Material Data

| Piece Parts | Material | Surface Plating |
|----------------|-----------------------|-----------------------------------|
| Centre contact | Bronze / Brass | Gold Plating (Nickel underplated) |
| Outer contact | Brass | SUCOPLATE (R) Plating |
| Body | Brass | SUCOPLATE (R) Plating |
| Insulator | PFA / PTFE | |
| Coupling nut | Brass | SUCOPLATE (R) Plating |
| Gasket | VMQ (Silicone rubber) | |
| Crimp ferrule | Copper | SUCOPLATE (R) Plating |

Related Documents

| | |
|----------------------|----------------|
| Outline drawing | DOU-00008246 |
| Catalogue drawing | DOU-00005944 |
| Assembly instruction | DOC-0000335265 |

Ordering Information

| | |
|----------------|-----------------------|
| Single package | 16_TNC-50-3-13/133_NE |
|----------------|-----------------------|

Additional Information

| | |
|-----------------|-----------------------------------|
| Suitable cables | RG_58_C/U, S_03232, RG_141_A/U-03 |
|-----------------|-----------------------------------|