

DPDT Switch, Latching, DC to 40 GHz, 2.92mm, Self Cutoff, 9 Pin D-Sub
Electrical

Switch Type	DPDT			
Actuator Type	Latching			
Switching Sequence	Break before make			
Switching Time	15 ms max			
Impedance	50 Ohms			
Frequency Range	DC-40 GHz			
*Nominal Actuating Voltage, Vdc	12 (11 to 13)	18 (16 to 20)	24 (22 to 26)	28 (26 to 30)
Actuating Current, mA	400	240	180	230



Frequency (GHz)	DC-6	6-12	12-18	18-26.5	26.5-40
VSWR (max)	1.2	1.3	1.35	1.7	2.0
Insertion Loss dB (max)	0.20	0.25	0.40	0.90	1.30
Isolation dB (min)	80	70	60	55	50

Environmental & Mechanical


Operating Temperature	-25℃~+65℃
Storage Temperature	-55℃~+85℃
Shock (Designed to meet)	MIL-STD-202 Method 213, Condition D, 500G (Non Operating)
Vibration (Designed to meet)	MIL-STD-202 Method 214, Condition D, 10G RMS (Non Operating)
Operating Life	3 Million Cycles Minimum
RF Connector	2.92mm Female
Actuator Terminals	9 Pin D-Sub
Weight	About 120g

Notes

*For model RD2-K40LXX-D, replace the XX with the desired Actuator Voltage. Example: RD2-K40L12-D for 12 Volts.

DPDT Switch, Latching, DC to 40 GHz, 2.92mm, Self Cutoff, 9 Pin D-Sub


Drawing (unit: mm, tolerance +/-0.5mm)

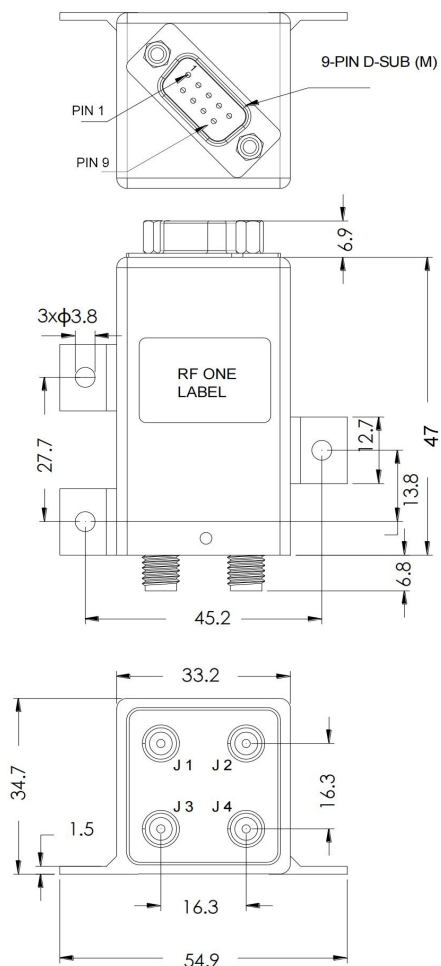

9 Pin D-Sub

Pin No.	Define
1	+ 1
2	+ 2
3	-COM
4	N/A
5	N/A
6	N/A
7	N/A
8	N/A
9	N/A

Schematic

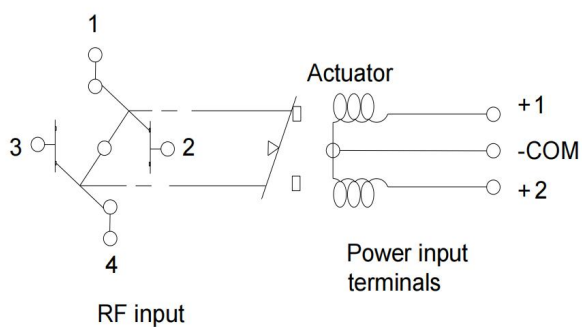

+ 1	+ 2	RF Path
On	Off	J1-J3 J2-J4
Off	On	J1-J2 J3-J4